刀柄及配件

HSK系列液压刀柄

1. 4299 系列：常用液压刀柄
   1.变径套：4368 /4369
   2.顶丝： 4900 调整刀长用
   3.注水管：4949
   4.液压锁紧螺丝：4241
   5.调整扳手：4912 内六角扳手
   6. 装卸水管扳手：4910

2. 4618系列：小直径【主要是用于6mm以下】

BT柄液压刀柄

1. 4620：小直径
2. 4221：一般尺寸
3. 工具基本与HSK通用
4. 拉钉：4927(45度)和4928(60度)

ER夹头系列刀柄

1.4304系列 无密封
锁紧螺母：4306
调节螺钉：4902
筒夹：4307
锁紧扳手：4913
冷却水管： 4949

2.4324系列 有密封
固定螺母：4306
调节螺钉：4902
密封垫圈：4335
筒夹:4307
锁紧扳手：4913
冷却水管：4949

丝攻系列刀柄

1.同步头：4326
2. 攻丝夹头刀柄：4327 有同步功能
锁紧螺母：4306
调整螺丝：4364
攻丝夹头：4308
密封垫圈：4325（4335）
锁紧扳手：4913
冷却水管：4949
3.液压刀柄：4601（HSK）4577(BT)
扳手：4912
调整螺丝：4364
攻丝夹头：4605、4606(同时带外冷)
冷却水管：4949

HSK-A hydraulic chucks HMC 3000 for clamping small diameters

Product information
- perfect concentricity: < 3 µm at 10xd1
- balancing quality: G2.5 / 25,000 rev./min or U< 1gmm
- HSK-A to ISO 12164-1/DIN 69893-1
- high clamping force
- quick, simple handling and accurate length setting
- IC and GÜHROJET peripheral cooling ensure optimal chip evacuation and tool lubrication

Scope of delivery
- incl. length adjustment screw
- incl. hexagon chuck key Guhring no. 4912

- order coolant delivery set Guhring no. 4949 separatel
- sealed version available as special option

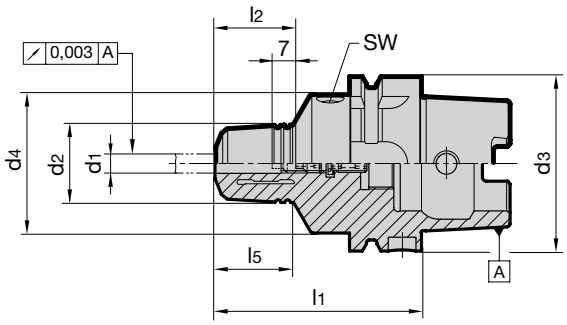

GÜHROJET

Guhring no.	**4618**
Discount group	**114**

HSK-A d_3	for shank Ø d_1 h6 mm	d_2 mm	d_4 mm	l_1 mm	l_2 mm	l_5 mm	SW	Code no.	Availability
32	3	28	40.0	84.0	34	33	4	3,032	●
32	4	28	40.0	84.0	34	33	4	4,032	●
32	5	28	40.0	84.0	34	33	4	5,032	●
40	3	28	33.5	74	34	40	4	3,040	●
40	4	28	33.5	74	34	40	4	4,040	●
40	5	28	33.5	74	34	40	4	5,040	●
50	3	28	40	74	34	32	4	3,050	●
50	4	28	40	74	34	32	4	4,050	●
50	5	28	40	74	34	32	4	5,050	●
63	3	28	50	74	34	29.5	5	3,063	●
63	4	28	50	74	34	29.5	5	4,063	●
63	5	28	50	74	34	29.5	5	5,063	●
100	3	28	50	79	34	30	5	3,100	●
100	4	28	50	79	34	30	5	4,100	●
100	5	28	50	79	34	30	5	5,100	●

HSK-A hydraulic chucks with increased clamping force

Product information

- balancing quality: G2.5 / 25,000 rev./min or U< 1gmm
- axial length setting
- max. deviation f. concentricity 3 µm
- for tool shank tolerance h6
- to DIN 69882-7
- also available in extra-long lengths l1 = 150 / 160 mm (concentricity 5 µm) and 200 mm (concentricity 7 µm)
- HSK-A to ISO 12164-1/DIN 69893-1

Scope of delivery

- incl. adjustment screw Guhring no. 4900
- incl. hexagon chuck key Guhring no. 4912

- order coolant delivery set Guhring no. 4949 separately

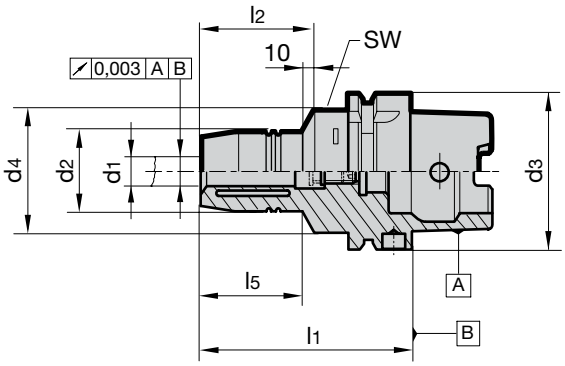

Guhring no.	4299
Discount group	147

HSK-A d_3	for shank Ø $d_{1\ h6}$ mm	d_2 mm	d_4 mm	l_1 mm	l_2 mm	l_5 mm	incl. setting screw 4900 …	SW	kg	Code no.	Availability
32	6	26	40.0	80	37	29	6.014	4	0.44	6,032	●
32	8	28	40.0	80	37	29	8.014	4	0.40	8,032	●
32	10	30	40.0	85	41	35	8.014	4	0.40	10,032	●
32	12	32	40.0	90	46	40	8.014	4	0.40	12,032	●
40	6	26	33.5	70	37	36	6.014	4	0.60	6,040	●
40	8	28	33.5	70	37	36	8.014	4	0.60	8,040	●
40	10	30	33.5	75	41	42	8.014	4	0.60	10,040	●
40	12	32	33.5	80	46	48	8.014	4	0.60	12,040	●
50	6	26	40.0	70	37	28	6.014	4	0.80	6,050	●
50	8	28	40.0	70	37	28	8.014	4	0.80	8,050	●
50	10	30	40.0	75	41	34	10.014	4	0.80	10,050	●
50	12	32	40.0	85	46	44	12.014	4	0.80	12,050	●
50	14	34	40.0	85	46	44	12.014	4	0.80	14,050	●
50	16	38	53.0	90	49	30	16.014	5	1.10	16,050	●
50	18	40	57.0	90	49	30	16.014	5	1.10	18,050	●
50	20	42	60.0	90	51	29	20.114	5	1.10	20,050	●
63	6	26	50.0	70	37	24.5	6.014	5	1.00	6,063	●
63	8	28	50.0	70	37	24.5	8.014	5	1.00	8,063	●
63	10	30	50.0	80	41	35.5	10.014	5	1.00	10,063	●
63	12	32	50.0	85	46	41.5	12.014	5	1.10	12,063	●
63	14	34	50.0	85	46	41.5	12.014	5	1.10	14,063	●
63	16	38	50.0	90	49	45.5	16.014	5	1.20	16,063	●
63	18	40	50.0	90	49	48.5	16.014	5	1.20	18,063	●
63	20	42	50.0	90	51	47.5	20.114	5	1.20	20,063	●
63	25	57	63.0	120	57	55.3	20.114	6	2.10	25,063	●
63	32	64	75.0	125	61	63	20.114	6	2.40	32,063	●
63	6	26	50.0	150	37	103	6.014	5	1.50	6,163	●
63	8	28	50.0	150	37	104	8.014	5	1.50	8,163	●
63	10	30	50.0	150	41	104	10.014	5	1.50	10,163	●
63	12	32	50.0	150	46	105	12.014	5	1.50	12,163	●
63	14	34	50.0	150	46	105	12.014	5	1.70	14,163	●
63	16	38	50.0	150	49	106	16.014	5	1.80	16,163	●
63	18	40	50.0	150	49	107	16.014	5	1.90	18,163	●
63	20	42	50.0	150	51	108	20.114	5	1.90	20,163	●
63	6	26	50.0	200	37	153	6.014	5	1.70	6,263	●
63	8	28	50.0	200	37	154	8.014	5	1.70	8,263	●
63	10	30	50.0	200	41	154	10.014	5	1.80	10,263	●
63	12	32	50.0	200	46	155	12.014	5	1.80	12,263	●
63	14	34	50.0	200	46	155	12.014	5	2.00	14,263	●
63	16	38	50.0	200	49	156	16.014	5	2.20	16,263	●

HSK-A hydraulic chucks with increased clamping force

										Guhring no.	4299
										Discount group	147
HSK-A d_3	for shank Ø $d_{1\ h6}$ mm	d_2 mm	d_4 mm	l_1 mm	l_2 mm	l_5 mm	incl. setting screw 4900 …	SW	kg	Code no.	Availability
63	18	40	50.0	200	49	157	16.014	5	2.30	18,263	●
63	20	42	50.0	200	51	158	20.114	5	2.50	20,263	●
80	6	26	50.0	70	37	24	6.014	5	1.50	6,080	●
80	8	28	50.0	70	37	24	8.014	5	1.50	8,080	●
80	10	30	50.0	80	41	35	10.014	5	1.50	10,080	●
80	12	32	50.0	85	46	40	12.014	5	1.60	12,080	●
80	14	34	50.0	85	46	40	12.014	5	1.60	14,080	●
80	16	38	50.0	95	49	51	16.014	5	1.70	16,080	●
80	18	40	50.0	95	49	51	16.014	5	1.80	18,080	●
80	20	42	50.0	95	51	52	20.114	5	1.80	20,080	●
80	25	57	63.0	110	57	65	20.114	6	2.60	25,080	●
80	32	64	75.0	125	61	63	20.114	6	3.20	32,080	●
100	6	26	50.0	75	37	26	6.014	5	2.40	6,100	●
100	8	28	50.0	75	37	26	8.014	5	2.40	8,100	●
100	10	30	50.0	90	41	42	10.014	5	2.50	10,100	●
100	12	32	50.0	95	46	47	12.014	5	2.50	12,100	●
100	14	34	50.0	95	46	47	12.014	5	2.50	14,100	●
100	16	38	50.0	100	49	53	16.014	5	2.70	16,100	●
100	18	40	50.0	100	49	53	16.014	5	2.70	18,100	●
100	20	42	50.0	105	51	59	20.114	5	3.20	20,100	●
100	25	57	63.0	110	57	62	20.114	6	3.30	25,100	●
100	32	64	75.0	110	61	62	20.114	6	3.80	32,100	●
100	6	26	50.0	160	37	104	6.014	5	2.80	106,100	●
100	8	28	50.0	160	37	104	8.014	5	2.80	108,100	●
100	10	30	50.0	160	41	105	10.014	5	2.90	110,100	●
100	12	32	50.0	160	46	105	12.014	5	2.90	112,100	●
100	14	34	50.0	160	46	107	12.014	5	2.90	114,100	●
100	16	38	50.0	160	49	107	16.014	5	3.20	116,100	●
100	18	40	50.0	160	49	108	16.014	5	3.20	118,100	●
100	20	42	50.0	160	51	108	20.114	5	3.60	120,100	●
100	25	57	63.0	160	57	110	20.114	6	3.70	125,100	●
100	32	64	75.0	160	61	110	20.114	6	4.20	132,100	●
100	6	26	50.0	200	37	144	6.014	5	3.00	206,100	●
100	8	27	50.0	200	37	144	8.014	5	3.00	208,100	●
100	10	30	50.0	200	41	145	10.014	5	3.10	210,100	●
100	12	32	50.0	200	46	145	12.014	5	3.10	212,100	●
100	14	34	50.0	200	46	147	12.014	5	3.10	214,100	●
100	16	38	50.0	200	49	147	16.014	5	3.40	216,100	●
100	18	40	50.0	200	49	148	16.014	5	3.40	218,100	●
100	20	42	50.0	200	51	148	20.114	5	3.80	220,100	●
100	25	57	63.0	200	57	150	20.114	6	3.90	225,100	●
100	32	64	75.0	200	61	150	20.114	6	4.40	232,100	●

MAS/BT hydraulic chucks HMC 3000 for clamping small diameters

Product information

- perfect concentricity: < 3 µm at 10xd1
- balancing quality: G2.5 / 25,000 rev./min or U< 1gmm
- MAS/BT to DIN ISO 7388-2 form JD/JF (form AD/B)
- BT30 design JD without coolant delivery via collar
- high clamping force
- quick, simple handling and accurate length setting
- IC and GÜHROJET peripheral cooling ensure optimal chip evacuation and tool lubrication

Scope of delivery

- incl. length adjustment screw
- incl. hexagon chuck key Guhring no. 4912

- order pull studs Guhring no. 4927, 4928 separately
- sealed version available as special option

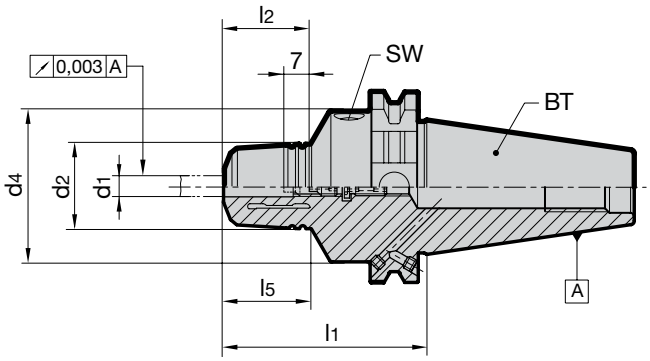

GÜHROJET

Guhring no.	**4620**
Discount group	**114**

BT	for shank Ø $d_{1\ h6}$ mm	d_2 mm	d_4 mm	l_1 mm	l_2 mm	l_5 mm	SW	Code no.	Availability
30	3	28.0	-	55.0	34	-	4	3,030	●
30	4	28.0	-	55.0	34	-	4	4,030	●
30	5	28.0	-	55.0	34	-	4	5,030	●
40	3	28.0	44.5	94.0	34	48.5	5	3,040	●
40	4	28.0	44.5	94.0	34	48.5	5	4,040	●
40	5	28.0	44.5	94.0	34	48.5	5	5,040	●

MAS/BT hydraulic chucks with increased clamping force

Product information
- balancing quality: G2.5 / 25,000 rev./min or U< 1gmm
- axial length setting
- max. deviation f. concentricity 3 µm
- for tool shank tolerance h6
- MAS/BT to JIS B 6339-2 form JD/JF (*: version JD without coolant supply over collar)

Scope of delivery
- incl. adjustment screw Guhring no. 4900
- incl. hexagon chuck key Guhring no. 4912

- order pull studs Guhring no. 4927, 4928 separately

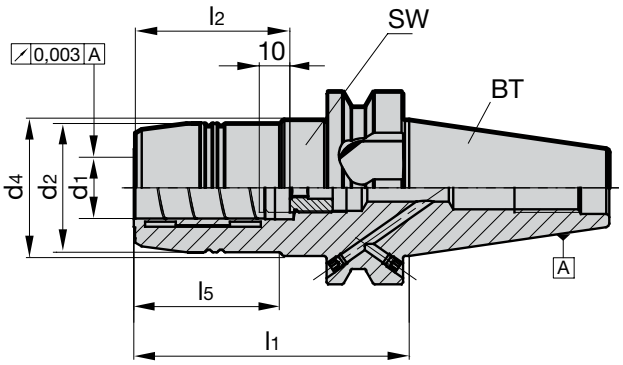

Guhring no.	**4221**
Discount group	**147**

BT	for shank Ø $d_{1\ h6}$ mm	d_2 mm	d_4 mm	l_1 mm	l_2 mm	l_5 mm	incl. setting screw 4900 …	SW	kg	Code no.	Availability
30	6	26.0	26.0	51.0	37	-	6.014	4	0.6	6,030	●
30	8	28.0	28.0	51.0	37	-	8.014	4	0.6	8,030	●
30	10	30.0	30.0	51.0	41	-	10.014	4	0.6	10,030	●
30	12	32.0	32.0	51.0	46	19.5	12.014	4	0.6	12,030	●
30	16	38.0	38.0	90.0	49	50	16.014	4	1.0	16,030	●
30	20	42.0	42.0	90.0	51	50	8.014	5	1.0	20,030	●
40	6	26.0	44.5	90.0	37	43.0	6.014	5	1.5	6,040	●
40	8	28.0	44.5	90.0	37	44.5	8.014	5	1.5	8,040	●
40	10	30.0	44.5	90.0	41	44.5	10.014	5	1.5	10,040	●
40	12	32.0	44.5	90.0	46	44.5	12.014	5	1.5	12,040	●
40	14	34.0	44.5	90.0	46	44.5	12.014	5	1.5	14,040	●
40	16	38.0	44.5	90.0	49	47.5	16.014	5	1.5	16,040	●
40	18	40.0	44.5	90.0	49	47.5	16.014	5	1.5	18,040	●
40	20	49.5	49.5	72.5	51	-	20.114	5	1.5	20,040	●
40	20	42.0	44.5	90.0	51	47.5	20.114	5	1.5	20,140	●
40	25	49.5	49.5	83.0	57	-	20.114	6	1.8	25,040	●
40	32	63.0	80.0	83.0	61	25.5	20.114	6	2.0	32,040	●
50	12	32.0	44.5	90.0	46	34.0	12.014	5	4.0	12,050	●
50	20	42.0	44.5	90.0	51	34.0	20.114	5	4.0	20,050	●
50	32	72.0	72.0	90.0	61	-	20.114	6	4.0	32,050	●

Product information

- balancing quality: G2.5 / 25.000 rev./min or U< 1gmm
- HSK-A to ISO 12164-1/DIN 69893-1

Scope of delivery

- incl. retaining nut Guhring no. 4306 and adjustment screw Guhring no. 4902
- order collet, Guhring no. 4307, clamping key, Guhring no. 4913 and coolant delivery set, Guhring no. 4949 separately

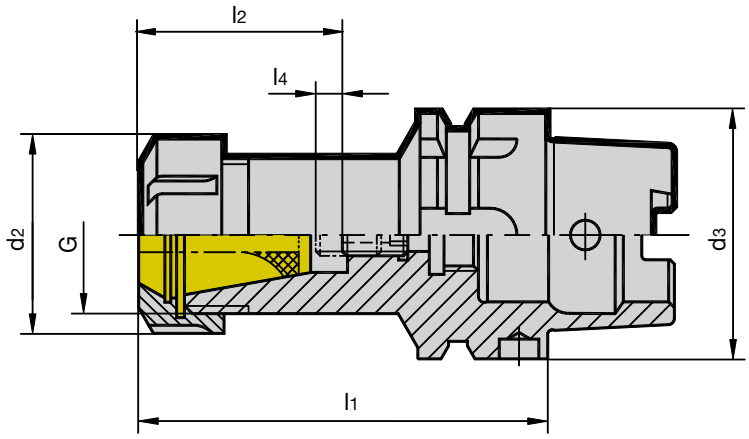

Guhring no.	**4304**
Discount group	**114**

HSK-A d_3	clamping range	d_2 mm	G	l_1 mm	l_2 mm	l_4 mm	incl. adjustment screw Guhr. no. 4902...	kg	Code no.	Availability
32	ER 11 Ø 1-7	19	M14 x 0.75	55	25	6	11.012	0.20	11,032	●
32	ER 16 Ø 1-10	28	M22 x 1.5	80	34	6	16.012	0.30	16,032	●
32	ER 20 Ø 3-13	34	M25 x 1.5	70	40	8	16.012	0.30	20,032	●
40	ER 16 Ø 1-10	28	M22 x 1.5	80	34	6	16.012	0.40	16,040	●
40	ER 25 Ø 2-16	42	M32 x 1.5	80	44	8	25.014	0.50	25,040	●
40	ER 32 Ø 3-20	50	M40 x 1.5	100	50	10	32.020	0.80	32,040	●
50	ER 16 Ø 1-10	28	M22 x 1.5	100	34	6	16.012	0.70	16,050	●
50	ER 25 Ø 2-16	42	M32 x 1.5	100	44	8	25.014	1.00	25,150	●
50	ER 25 Ø 2-16	42	M32 x 1.5	80	44	8	25.014	0.80	25,050	●
50	ER 32 Ø 3-20	50	M40 x 1.5	100	50	10	32.020	1.00	32,050	●
63	ER 16 Ø 1-10	28	M22 x 1.5	100	34	6	16.012	0.90	16,063	●
63	ER 16 Ø 1-10	28	M22 x 1.5	160	34	6	16.012	1.20	16,163	●
63	ER 25 Ø 2-16	42	M32 x 1.5	80	42	6	25.014	1.00	25,063	●
63	ER 25 Ø 2-16	42	M32 x 1.5	100	42	6	25.014	1.20	25,163	●
63	ER 32 Ø 3-20	50	M40 x 1.5	100	50	10	32.020	1.40	32,063	●
63	ER 40 Ø 3-26	63	M50 x 1.5	120	56	10	32.020	1.90	40,063	●
80	ER 32 Ø 3-20	50	M40 x 1.5	100	50	10	32.020	1.90	32,080	●
80	ER 32 Ø 3-20	50	M40 x 1.5	160	50	10	32.020	2.80	32,180	●
80	ER 40 Ø 3-26	63	M50 x 1.5	120	56	10	32.020	2.80	40,080	●
100	ER 32 Ø 3-20	50	M40 x 1.5	100	50	10	32.020	2.80	32,100	●
100	ER 32 Ø 3-20	50	M40 x 1.5	160	50	10	32.020	3.60	32,101	●
100	ER 40 Ø 3-26	63	M50 x 1.5	120	56	10	32.020	3.60	40,100	●

Product information

- sealed, suitable for coolant pressure up to 100 bar thanks to the application of IC clamping nuts and suitable sealing disks
- balancing quality: G2.5 / 25.000 rev./min or U< 1gmm
- HSK-A to ISO 12164-1/DIN 69893-1

Scope of delivery

- incl. IC retaining nut Guhring no. 4306 and adjustment screw Guhring no. 4902
- order sealing washer, Guhring no. 4335, collet, Guhring no. 4307, clamping key, Guhring no. 4913 and coolant delivery set Guhring no. 4949 separately

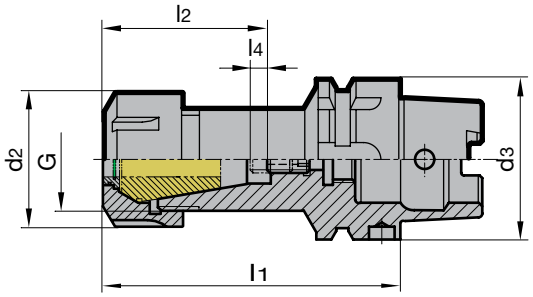

Guhring no.	**4324**
Discount group	**114**

HSK-A d_3	clamping range	d_2 mm	G	l_1 mm	l_2 mm	l_4 mm	incl. adjustment screw Guhr. no. 4902...	kg	Code no.	Availability
32	ER 16 Ø 1-10	28	M22 x 1.5	85	39	6	16.012	0.30	16,032	●
32	ER 20 Ø 3-13	34	M25 x 1.5	75	45	8	16.012	0.30	20,032	●
40	ER 16 Ø 1-10	28	M22 x 1.5	85	39	6	16.012	0.40	16,040	●
40	ER 25 Ø 2-16	42	M32 x 1.5	85	49	8	25.014	0.50	25,040	●
40	ER 32 Ø 3-20	50	M40 x 1.5	105	55	10	32.020	0.80	32,040	●
50	ER 16 Ø 1-10	28	M22 x 1.5	105	39	6	16.012	0.70	16,050	●
50	ER 25 Ø 2-16	42	M32 x 1.5	105	49	8	25.014	0.90	25,150	●
50	ER 25 Ø 2-16	42	M32 x 1.5	85	49	8	25.014	1.00	25,050	●
50	ER 32 Ø 3-20	50	M40 x 1.5	105	55	10	32.020	1.00	32,050	●
63	ER 16 Ø 1-10	28	M22 x 1.5	105	39	6	16.012	0.90	16,063	●
63	ER 16 Ø 1-10	28	M22 x 1.5	165	39	6	16.012	1.20	16,163	●
63	ER 25 Ø 2-16	42	M32 x 1.5	85	47	6	25.014	1.00	25,063	●
63	ER 25 Ø 2-16	42	M32 x 1.5	105	47	6	25.014	1.20	25,163	●
63	ER 32 Ø 3-20	50	M40 x 1.5	105	55	10	32.020	1.40	32,063	●
63	ER 40 Ø 3-26	63	M50 x 1.5	125	61	10	32.020	1.90	40,063	●
80	ER 32 Ø 3-20	50	M40 x 1.5	105	55	10	32.020	1.90	32,080	●
80	ER 32 Ø 3-20	50	M40 x 1.5	165	55	10	32.020	2.80	32,180	●
80	ER 40 Ø 3-26	63	M50 x 1.5	125	61	10	32.020	2.80	40,080	●
100	ER 32 Ø 3-20	50	M40 x 1.5	105	55	10	32.020	2.80	32,100	●
100	ER 32 Ø 3-20	50	M40 x 1.5	165	55	10	32.020	3.70	32,101	●
100	ER 40 Ø 3-26	63	M50 x 1.5	125	61	10	32.020	3.70	40,100	●

Product information

- HSK-A to ISO 12164-1/DIN 69893-1
- compensates synchronisation errors
- guarantees high thread quality and optimal tool life
- minimal length compensation in tension and compression direction balances very small pitch differences between synchro spindle and tap
- reduces an increase in axial forces during the cutting cycle to a minimum
- convenient hydraulic clamping using reduction bushes with active drive
- length-setting screw allows 3 mm readjustment
- suitable for internal cooling identifiable by black coloured ring
- coolant pressure up to max. 80 bar

Scope of delivery

- incl. hexagon clamping key Guhring no. 4912
- incl. adjustment key for adjustment screws

- order setting screw “face” Guhring no. 4364 separately
- order reduction bushes Guhring no. 4605 or 4606 separately
- for conventional cooling order coolant delivery set Guhring no. 4949 separately

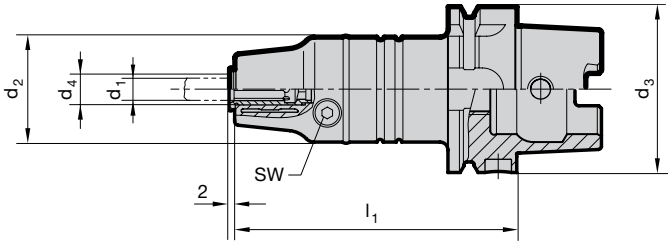

GÜHROSync

Guhring no.	**4601**
Discount group	**114**

HSK-A d3	d4 mm	for shank Ø d1 x VKT	for thread	d2 mm	l1 mm	tension/ compr. ± mm	SW	kg	Code no.	Availability
63	12.00	2.8-10	M3-M12	40	106.5	0.3	4	1.5	12.063	●
63	20.00	6-16	M8-M20	40	120.5	0.3	5	1.6	20.063	●
100	12.00	2.8-10	M3-M12	40	113.0	0.3	4	2.8	12.100	●
100	20.00	6-16	M8-M20	40	127.0	0.3	5	2.9	20.100	●

Product information

- MAS/BT30 to DIN ISO 7388-2 form JD without coolant supply over collar
- MAS/BT40 to DIN ISO 7388-2 form JD/JF (form AD/B)
- MAS/BT40 to JIS B 6339-2 form JD/JF (form AD/B)
- form B supplied with threaded pins in bores
- compensates synchronisation errors
- guarantees high thread quality and optimal tool life
- minimal length compensation in tension and compression direction balances very small pitch differences between synchro spindle and tap
- reduces an increase in axial forces during the cutting cycle to a minimum
- convenient hydraulic clamping using reduction bushes with active drive
- length-setting screw allows 3 mm readjustment
- suitable for internal cooling identifiable by black coloured ring
- coolant pressure up to max. 80 bar

Scope of delivery

- incl. hexagon clamping key Guhring no. 4912
- incl. adjustment key for adjustment screws

- order setting screw “face” Guhring no. 4364 separately
- order reduction bushes Guhring no. 4605 or 4606 separately
- order pull studs, Guhring no. 4927 or 4928 separately

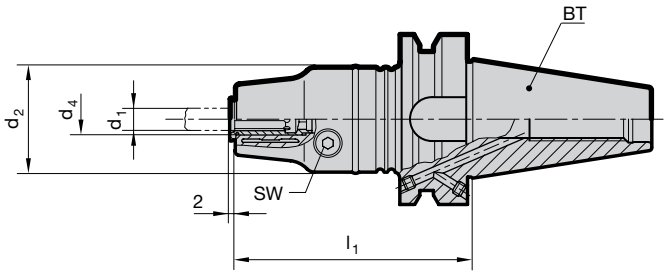

GÜHROSync

Guhring no.	**4577**
Discount group	**114**

BT	d_4 mm	for shank Ø d_1	for thread	d_2 mm	l_1 mm	tension/ compr. ± mm	SW	kg	Code no.	Availability
30	12.00	2.8-10	M3-M12	40	81	0.3	4	0.8	12,030	●
30	20.00	6-16	M8-M20	40	95	0.3	5	0.9	20,030	●
40	12.00	2.8-10	M3-M12	40	85	0.3	4	1.3	12,040	●
40	20.00	6-16	M8-M20	40	99	0.3	5	1.4	20,040	●

Synchro tapping chucks with straight shank

Product information
- compensate synchronisation errors
- minimal length compensation in tension and compression direction balances very small pitch differences between synchro spindle and tap, which can cause high frictional forces on the thread flanks
- length-setting screw allows 2 to 3 mm readjustment
- suitable for internal cooling
- max. coolant pressure up to 50 bar

Scope of delivery
- incl. sealed IC/ER clamping nut Guhring no. 4306 (*see torque)
- incl. adjustment key for adjustment screws

- order adjustment screws „plan“ Guhring no. 4364, tapping collet, Guhring no. 4308, sealing washer, Guhring no. 4335 and clamping key, Guhring no. 4913 separately

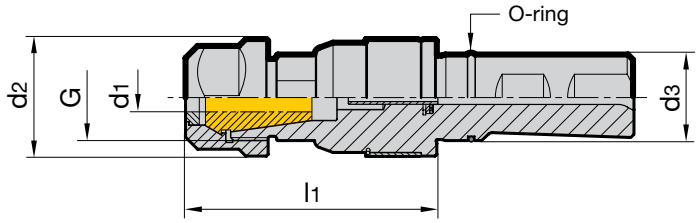

Guhring no.	**4326**
Discount group	**114**

d3 ~DIN 1835 mm	nom. size	for thread	d1 mm	d2 mm	l1 mm	tension/ compr. mm	torque* Nm	G	kg	Code no.	Availability
25	ER20	M3.5-M14	4-11.0	34	73	0.15	40	M25x1.5	0.50	20,025	●
25	ER32	M3.5-M28	4-20.0	50	88	0.15	170	M40x1.5	1.30	32,025	●

HSK-A synchro tapping chucks

Product information
- compensate synchronisation errors
- guarantee high thread quality and optimal tool life with conventional taps
- minimal length compensation in tension and compression direction between synchronous spindle and tap reduces excessive thread flank friction
- reduces a possible increase in axial forces during the cutting cycle to a minimum
- length-setting screw allows 2 to 3 mm readjustment
- suitable for internal cooling
- max. coolant pressure up to 50 bar
- HSK-A to ISO 12164-1/DIN 69893-1

Scope of delivery
- incl. sealed IC/ER clamping nut Guhring no. 4306 (*see torque)
- incl. adjustment key for adjustment screws

- order adjustment screws „plan“ Guhring no. 4364, tapping collet, Guhring no. 4308, sealing washer, Guhring no. 4325 and clamping key, Guhring no. 4913 separately
- forconventional cooling order coolant supply set Guhring no. 4949 separately

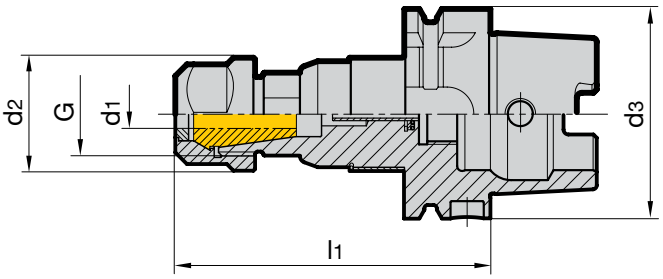

Guhring no.	**4327**
Discount group	**114**

HSK-A d3 mm	nom. size	for thread	d1 mm	d2 mm	l1 mm	tension/ compr. mm	torque* Nm	G	kg	Code no.	Availability
63	ER20	M3.5-M14	4-11.0	34	95.5	0.15	40	M25x1.5	1.00	20,063	●
63	ER20	M3.5-M14	4-11.0	34	160.0	0.15	40	M25x1.5	1.50	20,163	●
63	ER32	M3.5-M28	4-20.0	50	109.0	0.15	170	M40x1.5	1.70	32,063	●
100	ER20	M3.5-M14	4-11.0	34	102.0	0.15	40	M25x1.5	2.50	20,100	●
100	ER32	M3.5-M28	4-20.0	50	115.5	0.15	170	M40x1.5	2.70	32,100	●

Product information

- for clamping taps with square shank in GUHROSync synchro tapping chucks
- clamping-Ø for tool shank tolerance h6-h9
- face side closed, therefore coolant leak-proof for threading tools with IC
- positive drive
- position setting screw on tap shank
- length-setting screw allows 3 mm readjustment

Scope of delivery

- order setting screw “face” Guhring no. 4364 separately
- order MQL setting screws Guhring no. 4305 separately

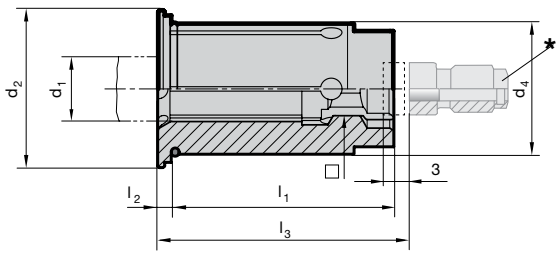

Guhring no.	4605
Discount group	114

d4 mm	d1 mm	□ mm	Standard	d1 inch	□ inch	d2 mm	l1 mm	l2 mm	l3 mm	* for adjustment screw		for thread	Code no.	Availability
12.00	2.800	2.100	DIN	-	-	16.50	29.00	2.00	-	-		M2 / M4	2,812	●
12.00	3.500	2.700	DIN	-	-	16.50	29.00	2.00	-	-		M3 / M4.5 / M5	3,512	●
12.00	4.000	3.200	JIS	-	-	16.50	29.00	2.00	-	-		M3	4,012	●
12.00	4.500	3.400	DIN	-	-	16.50	29.00	2.00	26.00	4364	5.020	M4 / M6	4,512	●
12.00	4.928	3.861	ANSI	0.194	0.152	16.50	29.00	2.00	26.00	4364	5.020	10-24 & 10-32	4,912	●
12.00	5.000	4.000	JIS	-	-	16.50	29.00	2.00	26.00	4364	5.020	M4	5,012	●
12.00	5.500	4.500	JIS	-	-	16.50	29.00	2.00	26.00	4364	5.020	M5	5,512	●
12.00	5.588	4.191	ANSI	0.220	0.165	16.50	29.00	2.00	26.00	4364	5.020	12-24 & 12-28	15,512	●
12.00	6.000	4.500	JIS	-	-	16.50	29.00	2.00	26.00	4364	5.020	M6	16,012	●
12.00	6.000	4.900	DIN	-	-	16.50	29.00	2.00	26.00	4364	6.020	M4.5 / M5 / M6 / M8	6,012	●
12.00	6.200	5.000	JIS	-	-	16.50	29.00	2.00	26.00	4364	6.020	M7 / M8	6,212	●
12.00	6.477	4.851	ANSI	0.255	0.191	16.50	29.00	2.00	26.00	4364	6.020	1/4-20 & 1/4-28	6,412	●
12.00	7.000	5.500	DIN / JIS	-	-	16.50	29.00	2.00	26.00	4364	7.020	M7 / M9 / M10	7,012	●
12.00	7.938	5.944	ANSI	0.3125	0.234	16.50	29.00	2.00	31.00	4364	7.020	1/16-27	7,912	●
12.00	8.000	6.200	DIN	-	-	16.50	29.00	2.00	31.00	4364	8.020	M8 / M11	8,012	●
12.00	8.000	6.500	JIS	-	-	16.50	29.00	2.00	31.00	4364	8.020	M11	18,012	●
12.00	8.077	6.045	ANSI	0.318	0.238	16.50	29.00	2.00	31.00	4364	7.020	5/16-18 & 5/16-24	28,012	●
12.00	8.204	6.147	ANSI	0.323	0.242	16.50	29.00	2.00	31.00	4364	7.020	7/16-14 & 7/16-20	8,212	●
12.00	8.500	6.500	JIS	-	-	16.50	29.00	2.00	31.00	4364	8.020	M12	8,512	●
12.00	9.000	7.000	DIN	-	-	16.50	29.00	2.00	32.00	4364	9.020	M9 / M12	9,012	●
12.00	9.322	6.985	ANSI	0.367	0.275	16.50	29.00	2.00	32.00	4364	9.020	1/2-13 & 1/2-20	9,312	●
12.00	9.677	7.264	ANSI	0.381	0.286	16.50	29.00	2.00	33.00	4364	9.020	3/8-16 & 3/8-24	9,612	●
12.00	10.000	8.000	DIN	-	-	16.50	29.00	2.00	36.00	4364	10.020	M10	10,012	●

Product information

- for clamping taps with square shank in GUHROSync synchro tapping chucks
- clamping-Ø for tool shank tolerance h6-h9
- face side closed, therefore coolant leak-proof for threading tools with IC
- positive drive
- position setting screw on tap shank
- length-setting screw allows 3 mm readjustment

Scope of delivery

- order setting screw “face” Guhring no. 4364 separately
- order MQL setting screws Guhring no. 4305 separately

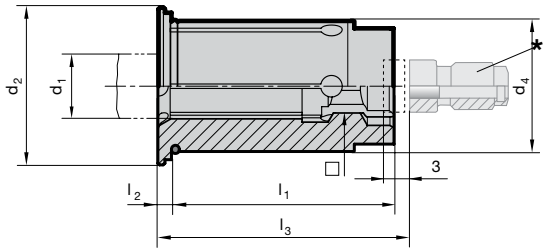

Guhring no.	**4605**
Discount group	**114**

d4 mm	d1 mm	□ mm	Standard	d1 inch	□ inch	d2 mm	l1 mm	l2 mm	l3 mm	* for adjustment screw	for thread	Code no.	Availability
20.00	6.000	4.500	JIS	-	-	24.10	34.00	2.00	26.00	4364 6.032	M6	26,020	●
20.00	6.000	4.900	DIN	-	-	24.10	34.00	2.00	26.00	4364 6.032	M4.5/M5/M6/M8	6,020	●
20.00	6.200	5.000	JIS	-	-	24.10	34.00	2.00	26.00	4364 6.032	M7 / M8	6,220	●
20.00	6.477	4.851	ANSI	0.255	0.191	24.10	34.00	2.00	26.00	4364 6.032	1/4-20 & 1/4-28	6,420	●
20.00	7.000	5.500	DIN / JIS	-	-	24.10	34.00	2.00	26.00	4364 7.032	M7 / M9 / M10	7,020	●
20.00	7.938	5.944	ANSI	0.3125	0.234	24.10	34.00	2.00	31.00	4364 7.032	1/16-27	7,920	●
20.00	8.000	6.200	DIN	-	-	24.10	34.00	2.00	31.00	4364 8.032	M8 / M11	8,020	●
20.00	8.000	6.500	JIS	-	-	24.10	34.00	2.00	31.00	4364 8.032	M11	18,020	●
20.00	8.077	6.045	ANSI	0.318	0.238	24.10	34.00	2.00	31.00	4364 8.032	5/16-18 & 5/16-24	28,020	●
20.00	8.204	6.147	ANSI	0.323	0.242	24.10	34.00	2.00	31.00	4364 8.032	7/16-14 & 7/16-20	8,220	●
20.00	8.500	6.500	JIS	-	-	24.10	34.00	2.00	31.00	4364 8.032	M12	8,520	●
20.00	9.000	7.000	DIN	-	-	24.10	34.00	2.00	32.00	4364 9.032	M9 / M12	9,020	●
20.00	9.322	6.985	ANSI	0.367	0.275	24.10	34.00	2.00	32.00	4364 8.032	1/2-13 & 1/2-20	9,320	●
20.00	9.677	7.264	ANSI	0.381	0.286	24.10	34.00	2.00	33.00	4364 9.032	3/8-16 & 3/8-24	9,620	●
20.00	10.000	8.000	DIN	-	-	24.10	34.00	2.00	36.00	4364 10.032	M10	10,020	●
20.00	10.500	8.000	JIS	-	-	24.10	34.00	2.00	36.00	4364 10.032	M14	10,520	●
20.00	10.897	8.179	ANSI	0.4290	0.3220	24.10	34.00	2.00	35.00	4364 10.032	9/16-12 & 9/16-18	10,820	●
20.00	11.000	9.000	DIN	-	-	24.10	34.00	2.00	37.00	4364 11.032	M14	11,020	●
20.00	12.000	9.000	DIN	-	-	24.10	34.00	2.00	37.00	4364 11.032	M12 / M16	12,020	●
20.00	12.192	9.144	ANSI	0.480	0.36	24.10	34.00	2.00	36.00	4364 11.032	5/8-11 & 5/8-18	12,120	●
20.00	12.500	10.000	JIS	-	-	24.10	34.00	2.00	38.00	4364 11.032	M16	12,520	●
20.00	13.000	10.000	JIS	-	-	24.10	34.00	2.00	38.00	4364 11.032	M17	13,020	●
20.00	14.000	11.000	DIN / JIS	-	-	24.10	34.00	2.00	39.00	4364 11.032	M18	14,020	●
20.00	14.288	10.693	ANSI	0.5625	0.421	24.10	34.00	2.00	38.00	4364 11.032	1/4-18	14,220	●
20.00	14.986	11.227	ANSI	0.590	0.442	24.10	34.00	2.00	39.00	4364 11.032	3/4-10 & 3/4-16	14,920	●
20.00	15.000	12.000	JIS	-	-	24.10	34.00	2.00	40.00	4364 16.032	M20	15,020	●
20.00	16.000	12.000	DIN	-	-	24.10	34.00	2.00	41.00	4364 16.032	M20	16,020	●

Product information

- for clamping taps with square shank in GUHROSync synchro tapping chucks
- clamping-Ø for tool shank tolerance h6-h9
- positive drive of reduction bush in Guhrosync synchro chuck
- with coolant slots for peripheral cooling, therefore process and tool life improvement
- coiled swarf is consistently washed away
- position setting screw on tap shank
- length-setting screw allows 3 mm readjustment

Scope of delivery

- order MQL setting screws Guhring no. 4305 separately
- order setting screw “face” Guhring no. 4364 separately

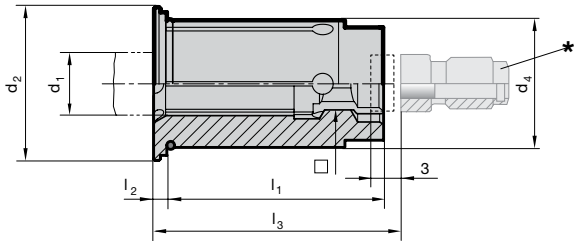

GÜHROJET

Guhring no.	**4606**
Discount group	**114**

d4 mm	d1 mm	□ mm	Standard	d1 inch	□ inch	d2 mm	l1 mm	l2 mm	l3 mm	* for adjustment screw	for thread	Code no.	Availability
12.00	2.800	2.100	DIN	-	-	16.50	29.00	2.00	-	-	M2 / M4	2.812	●
12.00	3.500	2.700	DIN	-	-	16.50	29.00	2.00	-	-	M3 / M4.5 / M5	3.512	●
12.00	4.000	3.200	JIS	-	-	16.50	29.00	2.00	-	-	M3	4.012	●
12.00	4.500	3.400	DIN	-	-	16.50	29.00	2.00	-	-	M4 / M6	4.512	●
12.00	4.928	3.861	ANSI	0.194	0.152	16.50	29.00	2.00	-	-	10-24 & 10-32	4.912	●
12.00	5.000	4.000	JIS	-	-	16.50	29.00	2.00	-	-	M4	5.012	●
12.00	5.500	4.500	JIS	-	-	16.50	29.00	2.00	-	-	M5	5.512	●
12.00	5.588	4.191	ANSI	0.220	0.165	16.50	29.00	2.00	-	-	12-24 & 12-28	15.512	●
12.00	6.000	4.500	JIS	-	-	16.50	29.00	2.00	26.00	6.020	M6	16.012	●
12.00	6.000	4.900	DIN	-	-	16.50	29.00	2.00	26.00	6.020	M4.5/M5/M6/M8	6.012	●
12.00	6.200	5.000	JIS	-	-	16.50	29.00	2.00	26.00	6.020	M7 / M8	6.212	●
12.00	6.477	4.851	ANSI	0.255	0.191	16.50	29.00	2.00	26.00	6.020	1/4-20 & 1/4-28	6.412	●
12.00	7.000	5.500	DIN / JIS	-	-	16.50	29.00	2.00	26.00	7.020	M7 / M9 / M10	7.012	●
12.00	7.938	5.944	ANSI	0.3125	0.234	16.50	29.00	2.00	31.00	7.020	1/16-27	7.912	●
12.00	8.000	6.200	DIN	-	-	16.50	29.00	2.00	31.00	8.020	M8 / M11	8.012	●
12.00	8.000	6.500	JIS	-	-	16.50	29.00	2.00	31.00	8.020	M11	18.012	●
12.00	8.077	6.045	ANSI	0.318	0.238	16.50	29.00	2.00	31.00	7.020	5/16-18 & 5/16-24	28.012	●
12.00	8.204	6.147	ANSI	0.323	0.242	16.50	29.00	2.00	31.00	8.020	7/16-14 & 7/16-20	8.212	●
12.00	8.500	6.500	JIS	-	-	16.50	29.00	2.00	31.00	8.020	M12	8.512	●
12.00	9.000	7.000	DIN	-	-	16.50	29.00	2.00	32.00	9.020	M9 / M12	9.012	●
12.00	9.322	6.985	ANSI	0.367	0.275	16.50	29.00	2.00	32.00	9.020	1/2-13 & 1/2-20	9.312	●
12.00	9.677	7.264	ANSI	0.381	0.286	16.50	29.00	2.00	33.00	9.020	3/8-16 & 3/8-24	9.612	●
12.00	10.000	8.000	DIN	-	-	16.50	29.00	2.00	36.00	10.020	M10	10.012	●

Product information

- for clamping taps with square shank in GUHROSync synchro tapping chucks
- clamping-Ø for tool shank tolerance h6-h9
- positive drive of reduction bush in Guhrosync synchro chuck
- with coolant slots for peripheral cooling, therefore process and tool life improvement
- coiled swarf is consistently washed away
- position setting screw on tap shank
- length-setting screw allows 3 mm readjustment

Scope of delivery

- order MQL setting screws Guhring no. 4305 separately
- order setting screw “face” Guhring no. 4364 separately

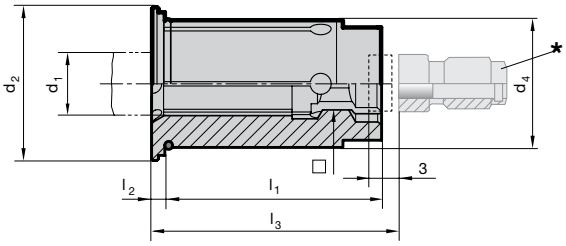

GÜHROJET

Guhring no.	**4606**
Discount group	**114**

d4 mm	d1 mm	□ mm	Standard	d1 inch	□ inch	d2 mm	l1 mm	l2 mm	l3 mm	* for adjustment screw	for thread	Code no.	Availability
20.00	6.000	4.500	JIS	-	-	24.10	34.00	2.00	26.00	6.032	M6	26,020	●
20.00	6.000	4.900	DIN	-	-	24.10	34.00	2.00	26.00	6.032	M4.5/M5/M6/M8	6,020	●
20.00	6.200	5.000	JIS	-	-	24.10	34.00	2.00	26.00	6.032	M7 / M8	6,220	●
20.00	6.477	4.851	ANSI	0.255	0.191	24.10	34.00	2.00	26.00	6.032	1/4-20 & 1/4-28	6,420	●
20.00	7.000	5.500	DIN / JIS	-	-	24.10	34.00	2.00	26.00	7.032	M7 / M9 / M10	7,020	●
20.00	7.938	5.944	ANSI	0.3125	0.234	24.10	34.00	2.00	31.00	7.032	1/16-27	7,920	●
20.00	8.000	6.200	DIN	-	-	24.10	34.00	2.00	31.00	8.032	M8 / M11	8,020	●
20.00	8.000	6.500	JIS	-	-	24.10	34.00	2.00	31.00	8.032	M11	18,020	●
20.00	8.077	6.045	ANSI	0.318	0.238	24.10	34.00	2.00	31.00	8.032	5/16-18 & 5/16-24	28,020	●
20.00	8.204	6.147	ANSI	0.323	0.242	24.10	34.00	2.00	31.00	8.032	7/16-14 & 7/16-20	8,220	●
20.00	8.500	6.500	JIS	-	-	24.10	34.00	2.00	31.00	8.032	M12	8,520	●
20.00	9.000	7.000	DIN	-	-	24.10	34.00	2.00	32.00	9.032	M9 / M12	9,020	●
20.00	9.322	6.985	ANSI	0.367	0.275	24.10	34.00	2.00	32.00	9.032	1/2-13 & 1/2-20	9,320	●
20.00	9.677	7.264	ANSI	0.381	0.286	24.10	34.00	2.00	33.00	9.032	3/8-16 & 3/8-24	9,620	●
20.00	10.000	8.000	DIN	-	-	24.10	34.00	2.00	36.00	10.032	M10	10,020	●
20.00	10.500	8.000	JIS	-	-	24.10	34.00	2.00	36.00	10.032	M14	10,520	●
20.00	10.897	8.179	ANSI	0.4290	0.3220	24.10	34.00	2.00	35.00	10.032	9/16-12 & 9/16-18	10,820	●
20.00	11.000	9.000	DIN	-	-	24.10	34.00	2.00	37.00	11.032	M14	11,020	●
20.00	12.000	9.000	DIN	-	-	24.10	34.00	2.00	37.00	11.032	M12 / M16	12,020	●
20.00	12.192	9.144	ANSI	0.480	0.36	24.10	34.00	2.00	36.00	11.032	5/8-11 & 5/8-18	12,120	●
20.00	12.500	10.000	JIS	-	-	24.10	34.00	2.00	38.00	11.032	M16	12,520	●
20.00	13.000	10.000	JIS	-	-	24.10	34.00	2.00	38.00	11.032	M17	13,020	●
20.00	14.000	11.000	DIN / JIS	-	-	24.10	34.00	2.00	39.00	14.032	M18	14,020	●
20.00	14.288	10.693	ANSI	0.5625	0.421	24.10	34.00	2.00	38.00	11.032	1/4-18	14,220	●
20.00	14.986	11.227	ANSI	0.590	0.442	24.10	34.00	2.00	39.00	11.032	3/4-10 & 3/4-16	14,920	●
20.00	15.000	12.000	JIS	-	-	24.10	34.00	2.00	40.00	16.032	M20	15,020	●
20.00	16.000	12.000	DIN	-	-	24.10	34.00	2.00	41.00	16.032	M20	16,020	●

Product information

- for hydro-synchro tapping chucks Guhring no. 4601, 4576, 4577 and 4525
- for synchro tapping chucks Guhring no. 4326 and 4327
- for conventional internal cooling
- with facing stop for standard shank ends
- position setting screw on tap shank
- length-setting screw allows 3 mm readjustment

Scope of delivery

- with O-ring for secure seal

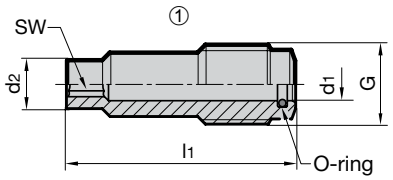



Guhring no.	**4364**
Discount group	**114**

for nominal size	for tap shank-Ø x □	G	d_1 mm	d_2 mm	l_1 mm	SW	O-ring	image	Code no.	Availability
ER20 / Hydro12	< Ø6	M8x1	3.6	3.3	28.0	2.0	3.5x1	1	5,020	●
ER20 / Hydro12	6x4.9	M8x1	3.6	4.8	26.0	2.5	3.5x1	1	6,020	●
ER20 / Hydro12	7x5.5	M8x1	3.6	5.4	25.8	2.5	3.5x1	1	7,020	●
ER20 / Hydro12	8x6.2	M8x1	3.6	6.1	20.9	2.5	3.5x1	1	8,020	●
ER20 / Hydro12	9x7	M8x1	3.6	6.9	20.3	2.5	3.5x1	1	9,020	●
ER20 / Hydro12	10x8	M8x1	3.6	7.8	15.8	2.5	3.5x1	2	10,020	●
ER20 / Hydro12	11x9	M8x1	3.6	8.8	14.8	2.5	3.5x1	2	11,020	●
ER32 / Hydro20	< Ø6	M10x1	4.1	3.3	33.0	2.0	4x1	1	5,032	●
ER32 / Hydro20	6x4.9	M10x1	4.1	4.8	34.0	3.0	4x1	1	6,032	●
ER32 / Hydro20	7x5.5	M10x1	4.1	5.4	33.8	3.0	4x1	1	7,032	●
ER32 / Hydro20	8x6.2	M10x1	4.1	6.1	28.8	3.0	4x1	1	8,032	●
ER32 / Hydro20	9x7	M10x1	4.1	6.9	28.3	3.0	4x1	1	9,032	●
ER32 / Hydro20	10x8	M10x1	4.1	7.8	23.8	3.0	4x1	1	10,032	●
ER32 / Hydro20	11x9 & 12x9	M10x1	4.1	8.8	22.9	3.0	4x1	1	11,032	●
ER32 / Hydro20	14x11	M10x1	4.1	10.8	20.7	3.0	4x1	2	14,032	●
ER32 / Hydro20	16x12	M10x1	4.1	11.8	19.7	3.0	4x1	2	16,032	●
ER32 / Hydro20	18x14.5 & 20x16	M10x1	4.1	14.3	18.0	3.0	4x1	2	18,032	●

Product information

- for clamping taps with square shank in synchro tapping chucks or collet holders
- smaller Ø4mm are clamped with collet, Guh. no. 4307 without sq. drive
- Tightening torque see clamping nuts Guhring no. 4306



Guhring no.	**4308**
Discount group	**114**

nom. size	for shank Ø d_1 mm	square SW	l_1 mm	l_2 mm	Code no.	Availability
ER16	4.5	3.4	27.5	18	4,516	●
ER16	5.5	4.3	27.5	18	5,516	●
ER16	6.0	4.9	27.5	18	6,016	●
ER16	7.0	5.5	27.5	18	7,016	●
ER16	8.0	6.2	27.5	22	8,016	●
ER20	4.0	3.0	31.5	15	4,020	●
ER20	4.5	3.4	31.5	18	4,520	●
ER20	5.5	4.3	31.5	18	5,520	●
ER20	6.0	4.9	31.5	18	6,020	●
ER20	7.0	5.5	31.5	18	7,020	●
ER20	8.0	6.2	31.5	22	8,020	●
ER20	9.0	7.0	31.5	22	9,020	●
ER20	10.0	8.0	31.5	25	10,020	●
ER20	11.0	9.0	31.5	25	11,020	●
ER25	4.5	3.4	34.0	18	4,525	●
ER25	5.5	4.3	34.0	18	5,525	●
ER25	6.0	4.9	34.0	18	6,025	●
ER25	7.0	5.5	34.0	18	7,025	●
ER25	8.0	6.2	34.0	22	8,025	●
ER25	9.0	7.0	34.0	22	9,025	●
ER25	10.0	8.0	34.0	25	10,025	●
ER25	11.0	9.0	34.0	25	11,025	●
ER25	12.0	9.0	34.0	25	12,025	●
ER32	4.0	3.0	40.0	15	4,032	●
ER32	4.5	3.4	40.0	18	4,532	●
ER32	5.5	4.3	40.0	18	5,532	●
ER32	6.0	4.9	40.0	18	6,032	●
ER32	7.0	5.5	40.0	18	7,032	●
ER32	8.0	6.2	40.0	22	8,032	●
ER32	9.0	7.0	40.0	22	9,032	●
ER32	10.0	8.0	40.0	25	10,032	●
ER32	11.0	9.0	40.0	25	11,032	●
ER32	12.0	9.0	40.0	25	12,032	●
ER32	14.0	11.0	40.0	25	14,032	●
ER32	16.0	12.0	40.0	25	16,032	●
ER32	18.0	14.5	40.0	25	18,032	●
ER32	20.0	16.0	40.0	28	20,032	●
ER40	7.0	5.5	46.0	18	7,040	●
ER40	8.0	6.2	46.0	22	8,040	●
ER40	9.0	7.0	46.0	22	9,040	●
ER40	10.0	8.0	46.0	25	10,040	●
ER40	11.0	9.0	46.0	25	11,040	●
ER40	12.0	9.0	46.0	25	12,040	●
ER40	14.0	11.0	46.0	25	14,040	●
ER40	16.0	12.0	46.0	25	16,040	●
ER40	18.0	14.5	46.0	25	18,040	●
ER40	20.0	16.0	46.0	28	20,040	●
ER40	22.0	18.0	46.0	28	22,040	●

Product information

- for clamping nuts
- TypeA with special hook key for clamping nuts System DIN 6499 mini design
- Type B for clamping nuts with hexagonal design
- Type C for clamping nuts for external slots

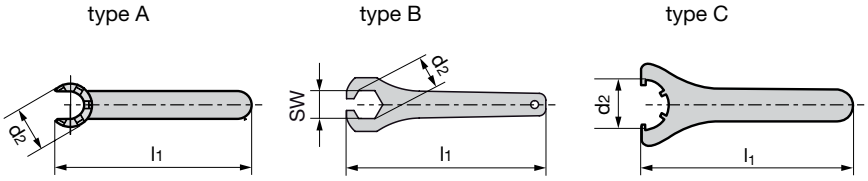

Guhring no.	**4913**
Discount group	**114**

nom. size mm	type	l_1 mm	for ER d_2 mm	SW	**Code no.**	**Availability**
ER16 mini	A	122	22	-	16,200	●
ER20 mini	A	139	28	-	20,200	●
ER25 mini	A	143	35	-	25,200	●
ER11	B	141	19	17	11,000	●
ER16	B	178	28	25	16,000	●
ER16	C	161	32	-	16,032	●
ER20	B	200	34	30	20,000	●
ER20	C	183	35	-	20,100	●
ER25	C	210	42	-	25,000	●
ER32	C	250	50	-	32,000	●
ER40	C	290	63	-	40,000	●

Adjustment screws for HSK-A/HSK-E collet holders

Product information

- For dimensions without d1 the screw is designed without spigot



Guhring no.	**4902**
Discount group	**114**

for nom. size	for clamping range	G	d_1 mm	l_1 mm	SW	Code no.	Availability
ER11	2- 7	M6	–	12	3	11,012	●
ER16	2- 6	M10	3.5	18	3	16,018	●
ER16	6-10	M10	–	12	3	16,012	●
ER16	6- 10	M10	-	10	3	16,010	●
ER20	2.5- 6	M10	4.5	24	3	20,024	●
ER20	6-10	M10	5.5	18	3	20,018	●
ER20	10-13	M10	–	12	3	16,012	●
ER25	2.5- 7	M16	4.5	26	4	25,026	●
ER25	7-10	M16	6.5	20	4	25,020	●
ER25	10-16	M16	–	14	4	25,014	●
ER32	3.5-10	M16	6.5	36	5	32,036	●
ER32	10-16	M16	9.5	28	5	32,028	●
ER32	16-20	M16	–	20	5	32,020	●
ER40	3- 8	M16	6.5	44	5	40,044	●
ER40	8-10	M16	6.5	36	5	32,036	●
ER40	10-16	M16	9.5	28	5	32,028	●
ER40	16-26	M16	–	20	5	32,020	●

Adjustment screws for HSK-C collet holders

Product information

- For dimensions without d1 the screw is designed without spigot



Guhring no.	**4901**
Discount group	**114**

for nom. size	for clamping range	G	d_1 mm	l_1 mm	SW	Code no.	Availability
ER16	2- 6	M10	3.5	16	3	16.016	●
ER16	6-10	M10	–	12	3	16.012	●
ER20	2.5- 6	M10	4.5	20	3	20.020	●
ER20	6-10	M10	5.5	16	3	20.016	●
ER20	10-13	M10	–	12	3	16.012	●
ER25	2.5- 7	M16	4.5	26	4	25.026	●
ER25	7-10	M16	6.5	20	4	25.020	●
ER25	10-16	M16	–	14	4	25.014	●
ER32	3- 7	M16	6.5	32	5	32.032	●
ER32	7-10	M16	6.5	26	5	32.026	●
ER32	10-16	M16	9.5	20	5	32.020	●
ER32	16-20	M16	–	14	4	25.014	●
ER40	3- 6	M16	6.5	38	5	40.038	●
ER40	6- 8	M16	6.5	32	5	32.032	●
ER40	8-10	M16	6.5	26	5	32.026	●
ER40	10-16	M16	9.5	20	5	32.020	●
ER40	16-26	M16	–	14	4	25.014	●

Product information

- the clamping range of collet, Guhring no. 4307, is to be applied as indicated. For intermediate sizes as i.e. for Ø 6.3 mm (nom. size ER20) order collet d1 = 7.0 mm - 6.0 mm (code no. 07,020).

Ordering example:

Ø d1	= 2.5
nom. size	= ER 20
Guhring no./Code no.	= 4307 02,520
(d1 = 7,0 mm - 6,0 mm)	



			Guhring no.	4307
			Discount group	114
nom. size	for clamping range d_1 mm	l_1 mm	Code no.	Availability
ER11 (4008E)	1.0-0.5	18.0	1,011	●
ER11 (4008E)	1.5-1.0	18.0	1,511	●
ER11 (4008E)	2.0-1.5	18.0	2,011	●
ER11 (4008E)	2.5-2.0	18.0	2,511	●
ER11 (4008E)	3.0-2.5	18.0	3,011	●
ER11 (4008E)	4.0-3.5	18.0	4,011	●
ER11 (4008E)	5.0-4.5	18.0	5,011	●
ER11 (4008E)	6.0-5.5	18.0	6,011	●
ER11 (4008E)	7.0-6.5	18.0	7,011	●
ER16 (426E)	1.0-0.5	27.5	1,016	●
ER16 (426E)	1.5-1.0	27.5	1,516	●
ER16 (426E)	2.0-1.0	27.5	2,016	●
ER16 (426E)	2.5-1.5	27.5	2,516	●
ER16 (426E)	3.0-2.0	27.5	3,016	●
ER16 (426E)	4.0-3.0	27.5	4,016	●
ER16 (426E)	5.0-4.0	27.5	5,016	●
ER16 (426E)	6.0-5.0	27.5	6,016	●
ER16 (426E)	7.0-6.0	27.5	7,016	●
ER16 (426E)	8.0-7.0	27.5	8,016	●
ER16 (426E)	9.0-8.0	27.5	9,016	●
ER16 (426E)	10.0-9.0	27.5	10,016	●
ER20 (428E)	1.0-0.5	31.5	1,020	●
ER20 (428E)	1.5-1.0	31.5	1,520	●
ER20 (428E)	2.0-1.0	31.5	2,020	●
ER20 (428E)	2.5-1.5	31.5	2,520	●
ER20 (428E)	3.0-2.0	31.5	3,020	●
ER20 (428E)	4.0-3.0	31.5	4,020	●
ER20 (428E)	5.0-4.0	31.5	5,020	●
ER20 (428E)	6.0-5.0	31.5	6,020	●
ER20 (428E)	7.0-6.0	31.5	7,020	●
ER20 (428E)	8.0-7.0	31.5	8,020	●
ER20 (428E)	9.0-8.0	31.5	9,020	●
ER20 (428E)	10.0-9.0	31.5	10,020	●
ER20 (428E)	11.0-10.0	31.5	11,020	●
ER20 (428E)	12.0-11.0	31.5	12,020	●
ER20 (428E)	13.0-12.0	31.5	13,020	●
ER25 (430E)	1.0-0.5	34.0	1,025	●
ER25 (430E)	1.5-1.0	34.0	1,525	●
ER25 (430E)	2.0-1.0	34.0	2,025	●
ER25 (430E)	2.5-1.5	34.0	2,525	●
ER25 (430E)	3.0-2.0	34.0	3,025	●
ER25 (430E)	4.0-3.0	34.0	4,025	●
ER25 (430E)	5.0-4.0	34.0	5,025	●
ER25 (430E)	6.0-5.0	34.0	6,025	●
ER25 (430E)	7.0-6.0	34.0	7,025	●
ER25 (430E)	8.0-7.0	34.0	8,025	●

			Guhring no.	4307
			Discount group	114
nom. size	for clamping range d_1 mm	l_1 mm	Code no.	Availability
ER25 (430E)	9.0-8.0	34.0	9,025	●
ER25 (430E)	10.0-9.0	34.0	10,025	●
ER25 (430E)	11.0-10.0	34.0	11,025	●
ER25 (430E)	12.0-11.0	34.0	12,025	●
ER25 (430E)	13.0-12.0	34.0	13,025	●
ER25 (430E)	14.0-13.0	34.0	14,025	●
ER25 (430E)	15.0-14.0	34.0	15,025	●
ER25 (430E)	16.0-15.0	34.0	16,025	●
ER32 (470E)	2.0-1.0	40.0	2,032	●
ER32 (470E)	2.5-1.5	40.0	2,532	●
ER32 (470E)	3.0-2.0	40.0	3,032	●
ER32 (470E)	4.0-3.0	40.0	4,032	●
ER32 (470E)	5.0-4.0	40.0	5,032	●
ER32 (470E)	6.0-5.0	40.0	6,032	●
ER32 (470E)	7.0-6.0	40.0	7,032	●
ER32 (470E)	8.0-7.0	40.0	8,032	●
ER32 (470E)	9.0-8.0	40.0	9,032	●
ER32 (470E)	10.0-9.0	40.0	10,032	●
ER32 (470E)	11.0-10.0	40.0	11,032	●
ER32 (470E)	12.0-11.0	40.0	12,032	●
ER32 (470E)	13.0-12.0	40.0	13,032	●
ER32 (470E)	14.0-13.0	40.0	14,032	●
ER32 (470E)	15.0-14.0	40.0	15,032	●
ER32 (470E)	16.0-15.0	40.0	16,032	●
ER32 (470E)	17.0-16.0	40.0	17,032	●
ER32 (470E)	18.0-17.0	40.0	18,032	●
ER32 (470E)	19.0-18.0	40.0	19,032	●
ER32 (470E)	20.0-19.0	40.0	20,032	●
ER40 (472E)	4.0-3.0	46.0	4,040	●
ER40 (472E)	5.0-4.0	46.0	5,040	●
ER40 (472E)	6.0-5.0	46.0	6,040	●
ER40 (472E)	7.0-6.0	46.0	7,040	●
ER40 (472E)	8.0-7.0	46.0	8,040	●
ER40 (472E)	9.0-8.0	46.0	9,040	●
ER40 (472E)	10.0-9.0	46.0	10,040	●
ER40 (472E)	11.0-10.0	46.0	11,040	●
ER40 (472E)	12.0-11.0	46.0	12,040	●
ER40 (472E)	13.0-12.0	46.0	13,040	●
ER40 (472E)	14.0-13.0	46.0	14,040	●
ER40 (472E)	15.0-14.0	46.0	15,040	●
ER40 (472E)	16.0-15.0	46.0	16,040	●
ER40 (472E)	17.0-16.0	46.0	17,040	●
ER40 (472E)	18.0-17.0	46.0	18,040	●
ER40 (472E)	19.0-18.0	46.0	19,040	●
ER40 (472E)	20.0-19.0	46.0	20,040	●
ER40 (472E)	21.0-20.0	46.0	21,040	●
ER40 (472E)	22.0-21.0	46.0	22,040	●
ER40 (472E)	23.0-22.0	46.0	23,040	●
ER40 (472E)	24.0-23.0	46.0	24,040	●
ER40 (472E)	25.0-24.0	46.0	25,040	●
ER40 (472E)	26.0-25.0	46.0	26,040	●

Product information
- for collets DIN ISO 15488
- for application with internal cooling IC/ER for sealing washer
- for increased clamping version ER or IC/ER with glide ring

Scope of delivery
- increased clamping force version: incl. glide ring
- version for internal cooling IC/ER: order sealing washer Guhring no. 4335 separately



Guhring no.	**4306**
Discount group	**114**

for sealing washer no. 4335	with glide ring	nom. size	d_2 mm	l_1 mm	G	max. torque	Code no.	Availability
–	–	ER16 mini	22	18.4	M19x1.0	55	16,200	●
–	–	ER20 mini	28	19.0	M24x1.0	75	20,200	●
–	–	ER25 mini	35	20.0	M30x1.0	100	25,200	●
–	–	ER11 (4008E)	19	11.3	M14x0.75	25	11,000	●
–	–	ER16 (426E)	28	17.5	M22x1.5	55	16,000	●
–	–	ER20 (428E)	34	19.0	M25x1.5	75	20,000	●
–	–	ER25 (430E)	42	20.0	M32x1.5	100	25,000	●
–	–	ER32 (470E)	50	22.5	M40x1.5	140	32,000	●
–	–	ER40 (472E)	63	25.5	M50x1.5	200	40,000	●
x	–	IC/ER16 mini	22	22.0	M19x1.0	55	16,300	●
x	–	IC/ER20 mini	28	24.0	M24x1.0	75	20,300	●
x	–	IC/ER25 mini	35	25.0	M30x1.0	100	25,300	●
x	–	IC/ER16	28	22.5	M22x1.5	55	16,600	●
x	–	IC/ER20	34	24.0	M25x1.5	75	20,600	●
x	–	IC/ER25	42	25.0	M32x1.5	100	25,600	●
x	–	IC/ER32	50	27.5	M40x1.5	140	32,600	●
x	–	IC/ER40	63	30.5	M50x1.5	200	40,600	●
–	x	ER16	28	20.3	M22x1.5	55	16,400	●
–	x	ER20	34	21.8	M25x1.5	75	20,400	●
–	x	ER25	42	22.4	M32x1.5	100	25,400	●
–	x	ER32	50	25.0	M40x1.5	140	32,400	●
–	x	ER40	63	28.3	M50x1.5	200	40,400	●
x	x	IC/ER16	28	22.7	M22x1.5	55	16,500	●
x	x	IC/ER20	34	24.2	M25x1.5	75	20,500	●
x	x	IC/ER25	42	25.2	M32x1.5	100	25,500	●
x	x	IC/ER32	50	27.4	M40x1.5	140	32,500	●
x	x	IC/ER40	63	30.7	M50x1.5	200	40,500	●

Sealing washers

Product information

- the application range of sealing washer, Guhring no. 4325, is from nom.-Ø d1 to the next dimension below, i.e. for Ø 6.3 mm (nom. size ER20) order sealing washer d1 = 6.5 mm (code no. 06,520).

Ordering example

Ø d1	= 3.5
nom. size	= ER 20
Guhring no./Code no.	= 4335 03,520



Guhring no.	**4335**
Discount group	**114**

nom. size	d_1 mm	d_2 mm	B mm	Code no.	Availability
ER16	3.0…10 um 0.5 mm stg.	13	4	3,016 - 10,016	●
ER20	3.0…13 um 0.5 mm stg.	16	4	3,020 - 13,020	●
ER25	3.0…16 um 0.5 mm stg.	21	4	3,025 - 16,025	●
ER32	3.0…20 um 0.5 mm stg.	27	4	3,032 - 20,032	●
ER40	3.5…26 um 0.5 mm stg.	33.5	4	3,540 - 26,040	●

HSK-A drilling chucks with internal cooling

Product information

- for clamping all straight shank tools
- HSK-A to ISO 12164-1/DIN 69893-1
- continous Ø-range
- high clamping force thanks to robust worm gear
- max. coolant pressure up to 50 bar
- NC drilling chucks are suitable for speeds up to 7,000 rev./min. With optional fine balancing up to max. 18,000 rev./min.

Scope of delivery

- incl. clamping key
- order coolant delivery set, Guhring no. 4949 separately

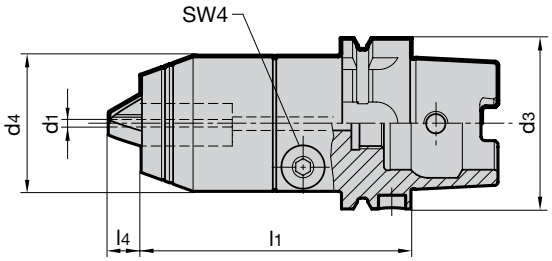

GÜHROJET

Guhring no.	**4346**
Discount group	**114**

HSK-A d_3	clamping range d_1 mm	d_4 mm	l_1 mm	l_4 mm	kg	Code no.	Availability
50	1-16	50	107	12	1.60	16,050	●
63	1-16	50	98	12	1.90	16,063	●
80	1-16	50	101	12	2.70	16,080	●
100	1-16	50	104	12	3.30	16,100	●

Reduction bushes, sealed, for hydraulic chucks

Product information
- for clamping smaller shank-Ø in hydraulic chucks
- clamping-Ø for tool shank tolerance h6
- closed endface, therefore leakproof up to 80 bar
- concentricity ≤ 2 µm
- with adjustable limit stop
- the application of reduction bushes makes it possible to increase the permissible transferable torque by approx. 25% in comparsion to direct clamping

Scope of delivery
- incl. stop element

- special dimensions on request

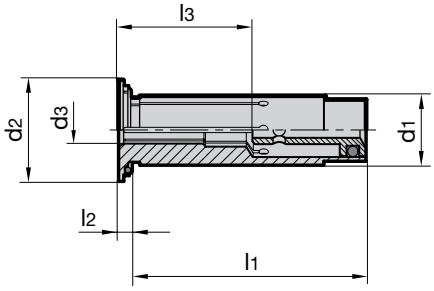

Guhring no.	**4368**
Discount group	**114**

d_1 mm	for shank Ø $d_{3\ h6}$ mm	d_2 mm	l_1 mm	l_2 mm	l_3 mm	Code no.	Availability
12	3	16.5	45	2	25.5	3,012	●
12	4	16.5	45	2	25.5	4,012	●
12	5	16.5	45	2	25.5	5,012	●
12	6	16.5	45	2	33.5	6,012	●
12	8	16.5	45	2	33.5	8,012	●
20	3	24.1	50.5	2	28.5	3,020	●
20	4	24.1	50.5	2	28.5	4,020	●
20	5	24.1	50.5	2	28.5	5,020	●
20	6	24.1	50.5	2	37.5	6,020	●
20	7	24.1	50.5	2	37.5	7,020	●
20	8	24.1	50.5	2	37.5	8,020	●
20	9	24.1	50.5	2	42.5	9,020	●
20	10	24.1	50.5	2	42.5	10,020	●
20	11	24.1	50.5	2	42.5	11,020	●
20	12	24.1	50.5	2	47.5	12,020	●
20	13	24.1	50.5	2	47.5	13,020	●
20	14	24.1	50.5	2	47.5	14,020	●
20	15	24.1	50.5	2	47.5	15,020	●
20	16	24.1	50.5	2	47.5	16,020	●
32	6	35.5	60.5	3	34.5	6,032	●
32	8	35.5	60.5	3	34.5	8,032	●
32	10	35.5	60.5	3	39.5	10,032	●
32	12	35.5	60.5	3	41.5	12,032	●
32	14	35.5	60.5	3	41.5	14,032	●
32	16	35.5	60.5	3	49.5	16,032	●
32	18	35.5	60.5	3	49.5	18,032	●
32	20	35.5	60.5	3	49.5	20,032	●
32	25	35.5	60.5	3	57.5	25,032	●

Reduction bushes, sealed, for hydraulic chucks

Product information
- for clamping smaller shank-Ø in hydraulic chucks
- clamping-Ø for tool shank tolerance h6
- closed endface, therefore leakproof up to 80 bar
- concentricity ≤ 2 µm
- with adjustable limit stop
- the application of reduction bushes makes it possible to increase the permissible transferable torque by approx. 25% in comparsion to direct clamping

Scope of delivery
- incl. stop element

- special dimensions on request

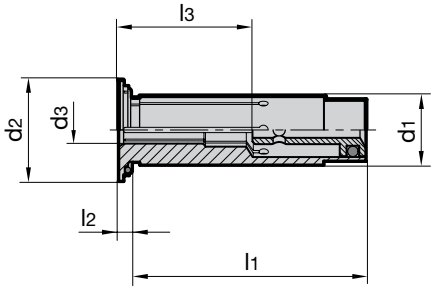

Guhring no.	**4368**
Discount group	**114**

d_1 mm	for shank Ø $d_{3\ h6}$ mm	d_2 mm	l_1 mm	l_2 mm	l_3 mm	Code no.	Availability
12	3	16.5	45	2	25.5	3,012	●
12	4	16.5	45	2	25.5	4,012	●
12	5	16.5	45	2	25.5	5,012	●
12	6	16.5	45	2	33.5	6,012	●
12	8	16.5	45	2	33.5	8,012	●
20	3	24.1	50.5	2	28.5	3,020	●
20	4	24.1	50.5	2	28.5	4,020	●
20	5	24.1	50.5	2	28.5	5,020	●
20	6	24.1	50.5	2	37.5	6,020	●
20	7	24.1	50.5	2	37.5	7,020	●
20	8	24.1	50.5	2	37.5	8,020	●
20	9	24.1	50.5	2	42.5	9,020	●
20	10	24.1	50.5	2	42.5	10,020	●
20	11	24.1	50.5	2	42.5	11,020	●
20	12	24.1	50.5	2	47.5	12,020	●
20	13	24.1	50.5	2	47.5	13,020	●
20	14	24.1	50.5	2	47.5	14,020	●
20	15	24.1	50.5	2	47.5	15,020	●
20	16	24.1	50.5	2	47.5	16,020	●
32	6	35.5	60.5	3	34.5	6,032	●
32	8	35.5	60.5	3	34.5	8,032	●
32	10	35.5	60.5	3	39.5	10,032	●
32	12	35.5	60.5	3	41.5	12,032	●
32	14	35.5	60.5	3	41.5	14,032	●
32	16	35.5	60.5	3	49.5	16,032	●
32	18	35.5	60.5	3	49.5	18,032	●
32	20	35.5	60.5	3	49.5	20,032	●
32	25	35.5	60.5	3	57.5	25,032	●

GÜHROJET reduction bushes for hydraulic chucks with peripheral cooling

Product information

- for clamping smaller shank-Ø in hydraulic chucks
- clamping-Ø for tool shank tolerance h6
- with coolant slots for peripheral cooling, therefore process and tool life improvement
- concentricity ≤ 2 µm
- with adjustable limit stop
- the application of reduction bushes makes it possible to increase the permissible transferable torque by approx. 25% in comparsion to direct clamping

Scope of delivery

- incl. stop element
- special dimensions on request

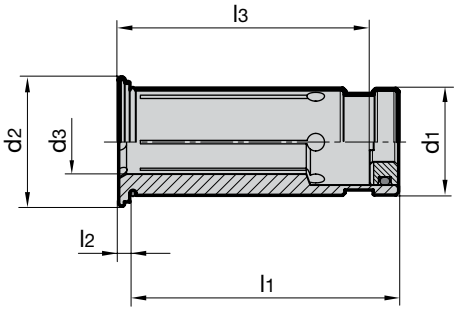

GÜHROJET

Guhring no.	**4369**
Discount group	**114**

d_1 mm	for shank Ø $d_{3\ h6}$ mm	d_2 mm	l_1 mm	l_2 mm	l_3 mm	Code no.	Availability
12	3	16.5	45	2	25.5	3,012	●
12	4	16.5	45	2	25.5	4,012	●
12	5	16.5	45	2	25.5	5,012	●
12	6	16.5	45	2	33.5	6,012	●
12	8	16.5	45	2	33.5	8,012	●
20	3	24.1	50.5	2	28.5	3,020	●
20	4	24.1	50.5	2	28.5	4,020	●
20	5	24.1	50.5	2	28.5	5,020	●
20	6	24.1	50.5	2	37.5	6,020	●
20	7	24.1	50.5	2	37.5	7,020	●
20	8	24.1	50.5	2	37.5	8,020	●
20	9	24.1	50.5	2	42.5	9,020	●
20	10	24.1	50.5	2	42.5	10,020	●
20	11	24.1	50.5	2	42.5	11,020	●
20	12	24.1	50.5	2	47.5	12,020	●
20	13	24.1	50.5	2	47.5	13,020	●
20	14	24.1	50.5	2	47.5	14,020	●
20	15	24.1	50.5	2	47.5	15,020	●
20	16	24.1	50.5	2	47.5	16,020	●
32	6	35.5	60.5	3	34.5	6,032	●
32	8	35.5	60.5	3	34.5	8,032	●
32	10	35.5	60.5	3	39.5	10,032	●
32	12	35.5	60.5	3	41.5	12,032	●
32	14	35.5	60.5	3	41.5	14,032	●
32	16	35.5	60.5	3	49.5	16,032	●
32	18	35.5	60.5	3	49.5	18,032	●
32	20	35.5	60.5	3	49.5	20,032	●
32	25	35.5	60.5	3	57.5	25,032	●

Pull studs BT DIN ISO 7388-3

Product information
- for tool holders to DIN ISO 7388-2 (MAS 403 BT)

- 45° clamping shoulder angle
- Design JD sealed with through hole
- Design JF without through hole

- 40,100 shortened and sealed, for draw-in clamping force test equipment Guhring no. 4973

form JF

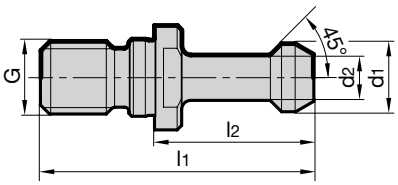

form JD

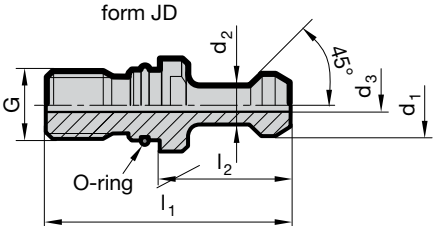

Guhring no.	**4927**
Discount group	**114**

for BT	d_1 mm	d_2 mm	d_3 mm	l_1 mm	l_2 mm	G	form	Code no.	Availability
30	11.0	7.0	-	43.0	23	M12	JF	30,000	●
40	15.0	10.0	-	57.0	32	M16	JF	40,100	●
40	15.0	10.0	-	60.0	35	M16	JF	40,000	●
50	23.0	17.0	-	65.0	45	M24	JF	50,000	●
30	11.0	7.0	2.5	43.0	23	M12	JD	30,001	●
40	15.0	10.0	3.0	60.0	35	M16	JD	40,001	●
50	23.0	17.0	8.5	85.0	45	M24	JD	50,001	●

Pull studs BT DIN ISO 7388-3

Product information
- for tool holders to DIN ISO 7388-2 (MAS 403 BT)

- 60° clamping shoulder angle
- Design JD sealed with through hole
- Design JF without through hole

- 40,100 shortened and sealed, for draw-in clamping force test equipment Guhring no. 4973

form JF

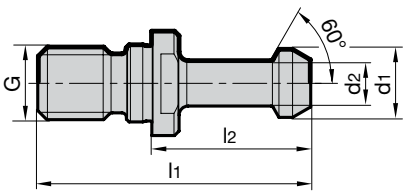

form JD

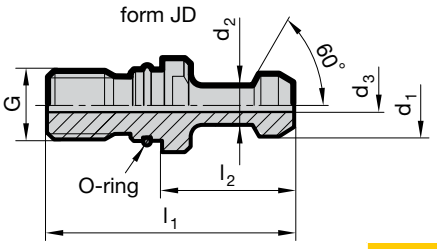

Guhring no.	**4928**
Discount group	**114**

for BT	d_1 mm	d_2 mm	d_3 mm	l_1 mm	l_2 mm	G	form	Code no.	Availability
30	11.0	7.0	-	43.0	23	M12	JF	30,000	●
40	15.0	10.0	-	57.0	32	M16	JF	40,100	●
40	15.0	10.0	-	60.0	35	M16	JF	40,000	●
50	23.0	17.0	-	85.0	45	M24	JF	50,000	●
40	15.0	10.0	3.0	60.0	35	M16	JD	40,001	●
50	23.0	17.0	8.5	85.0	45	M24	JD	50,001	●

Activation screw for hydraulic chucks

Product information
- Replacement screws for the clamping activation of hydraulic chucks
- Activation screw spec. for hydraulic chucks to suit hex.key size



Guhring no.	**4241**
Discount group	**114**

G	l_1 mm	SW	Code no.	Availability
M8	10.0	4.0	8,000	●
M10	10.5	5.0	10,001	●
M10	12.0	5.0	10,002	●
M12	12.0	6.0	12,000	●

Adjustment screws

Product information
- for hydraulic chucks
- for conentional internal cooling
- with facing stop for standard shank ends
- for HSK 32/40 with clamping-Ø 10,0 and 12,0 mm use code no. 8,014

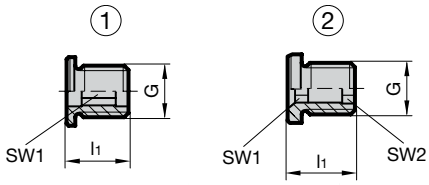

Guhring no.	**4900**
Discount group	**114**

for clamping-Ø	l_1 mm	G	SW1	SW2	figure	Code no.	Availability
6	14	M5	2.5	-	1	6,014	●
8	14	M6	3.0	-	1	8,014	●
10	14	M8x1	4.0	-	1	10,014	●
12/14	14	M10x1	5.0	-	1	12,014	●
16/18	14	M12x1	6.0	-	1	16,014	●
20/25/32	14	M16x1	6.0	-	1	20,014	●
20/25/32	14	M16x1	8.0	6.0	2	20,114	●

MQL length pre-setting screws for the conversion

Product information
- for hydraulic chucks and shrink fit chucks
- optimised for MQL with special geometry
- with tapered stop for MQL conical shank ends



Guhring no.	**4919**
Discount group	**114**

d_1 mm	l_1 mm	G	SW1	SW2	Code no.	Availability
6	14.8	M5	2.5	2.5	6,000	●
8	15.6	M6	3.0	3.0	8,000	●
10	16.1	M8x1	4.0	4.0	10,000	●
10	16.6	M8x1	3.0	3.0	10,040	●
10	16.6	M6	3.0	3.0	10,032	●
12	16.6	M10x1	5.0	5.0	12,000	●
12	17.6	M6	3.0	3.0	12,032	●
14	17.6	M10x1	5.0	5.0	14,000	●
14	18.6	M6	3.0	3.0	14,040	●
16	18.6	M12x1	5.0	5.0	16,000	●
16	19.6	M6	3.0	3.0	16,040	●
18	19.6	M12x1	5.0	5.0	18,000	●
20	20.6	M16x1	5.0	5.0	20,000	●
25	22.6	M16x1	8.0	6.0	25,000	●
32	26.1	M16x1	8.0	6.0	32,000	●

Coolant delivery sets for conventional cooling

Product information
- leak-proof screwed connection tested to 80 bar
- to DIN 69895
- F = angle movability ± 1°
- for HSK-A and HSK-E shanks

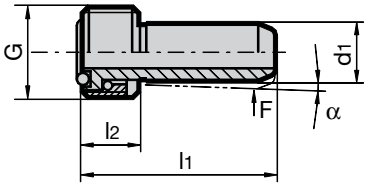

Scope of delivery
- incl. union nut and O-rings

Guhring no.	**4949**
Discount group	**114**

for HSK-A	d_1 mm	α °	F	G	l_1 mm	l_2 mm	Code no.	Availability
32	6	1.2	5N	M10x1	26.0	5.5	10.032	●
40	8	1.4	5N	M12x1	29.5	7.5	12.040	●
50	10	1.3	6N	M16x1	33.0	9.5	16.050	●
63	12	1.3	6N	M18x1	36.5	11.5	18.063	●
80	14	1.4	7N	M20x1.5	40.0	13.5	20.080	●
100	16	1.4	7N	M24x1.5	44.0	15.5	24.100	●

Coolant delivery sets for conventional cooling with filter

Product information
- leak-proof screwed connection tested to 80 bar
- similar DIN 69895
- with filter for contamination-free cooling
- protects against tool breakage and eases error analysis
- F = angle movability ± 1°
- for HSK-A and HSK-E shanks

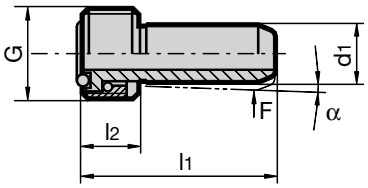

Scope of delivery
- incl. union nut and O-rings
- 100µ stainless steel fabric filter

Guhring no.	**4979**
Discount group	**114**

for HSK-A	d_1 mm	α °	F	G	l_1 mm	l_2 mm	Code no.	Availability
32	6	1.2	5N	M10x1	26.0	5.5	10,032	●
40	8	1.4	5N	M12x1	29.5	7.5	12,040	●
50	10	1.3	6N	M16x1	33.0	9.5	16,050	●
63	12	1.3	6N	M18x1	36.5	11.5	18,063	●
80	14	1.4	7N	M20x1.5	40.0	13.5	20,080	●
100	16	1.4	7N	M24x1.5	44.0	15.5	24,100	●

Data coding chip

Product information
- Identification systems BIS C
- for installation space to DIN 69 873
- data carrier read/write
- 511 bytes
- operating temperature 0…+70
- protection class to IEC
- product data exchange acc. to DIN 4000
- glued in bore Ø10 H11



Scope of delivery
- data coding chip
- installation in chuck and additional balancing can be ordered separately

Guhring no.	**4955**
Discount group	**114**

coding chip BIS C	Code no.	Availability
10 x 4,5	10,000	●

Hexagon clamping keys

Product information
- for hexagon socket screws
- with ergonomic handle for the safe handling of our clamping devices
- Code no. 4,600/4,010 special key for HPC chucks

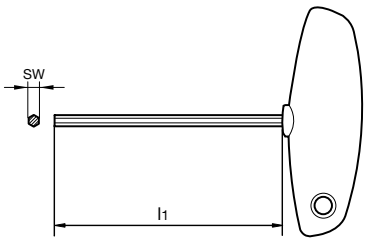

Type A

Type B

Guhring no.	**4912**
Discount group	**114**

SW	Hexagon length mm	Type	Code no.	Availability
2.0	100	A	2,000	●
2.5	100	A	2,500	●
3.0	100	A	3,000	●
3/4/5/6	100	A	3,456	●
4.0	100	A	4,000	●
4.0	100	A	4,010	●
4/6	100	A	4,600	●
5.0	100	A	5,000	●
6.0	100	A	6,000	●
8.0	100	A	8,000	●
10.0	100	A	10,000	●
12.0	100	A	12,000	●
2.5	200	A	2,501	●
3.0	200	A	3,001	●
4.0	200	A	4,001	●
5.0	200	A	5,001	●
6.0	200	A	6,001	●
7.0	200	A	7,001	●
8.0	200	A	8,001	●
1.5	3.0	B	1,500	●
2.0	3.5	B	2,001	●
2.5	3.5	B	2,502	●
3.0	3.5	B	3,003	●
3.0	4.3	B	3,002	●
4.0	4.5	B	4,002	●

Hexagon clamping key

Product information
- for hexagon socket screws

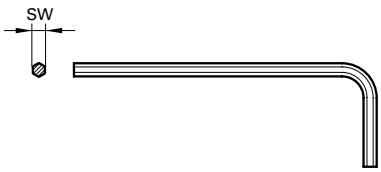

Guhring no.	**4921**
Discount group	**114**

for threaded pin Guhring no. 4551	SW	Code no.	Availability
HSK 25	0,9	0,900	●
HSK 32	1,3	1,300	●
HSK 40	1,5	1,500	●

Sockets

Product information
- with T-handle
- for coolant delivery sets for conventional cooling and MQL coolant delivery unit

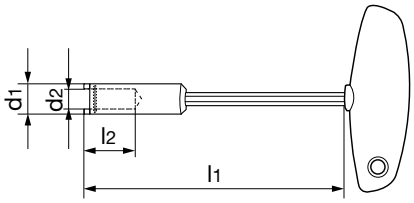

					Guhring no.	4911
					Discount group	114
for HSK	d1 mm	d2 mm	l1 mm	l2 mm	Code no.	Availability
32	11,0	6,1	128	23,0	24,000	●
40	13,0	8,1	134	26,0	30,000	●
50	15,0	10,1	134	28,0	38,000	●
63	17,0	12,1	135	31,5	48,000	●
80	20,0	14,1	138	32,0	60,000	●
100	22,5	16,1	138	35,0	75,000	●

Sockets

Product information
- suitable for torque wrench Guhring no. 4915, drive 3/8‘‘
- for coolant delivery sets



					Guhring no.	4910
					Discount group	114
for HSK	MA Nm	d_1 mm	d_2 mm	L mm	Code no.	Availability
32	7	20	14	60	24,000	●
40	11	20	16	60	30,000	●
50	15	20	18	60	38,000	●
63	20	20	18	60	48,000	●
80	25	20	20	75	60,000	●
100	30	22	22	80	75,000	●

Installation of coolant delivery sets 4949/4979

1. The HSK holder must be clean, free of swarf and undamaged.
2. Grease the O-rings prior to assembly.
3. Centrally insert the complete coolant delivery set (coolant pipe, union nut and 2 O-rings) in the HSK with the assistance of the socket spanner.
4. Screw in the coolant delivery set/coolant delivery unit and tighten (see table for torque figures)
5. Check coolant pipe for radial mobility.

Torque figures
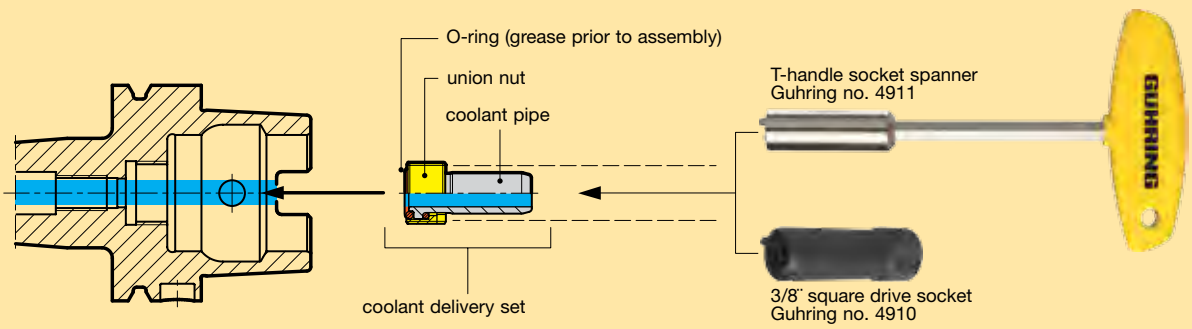
for HSK	MA Nm
32	7
40	11
50	15
63	20
80	25
100	30