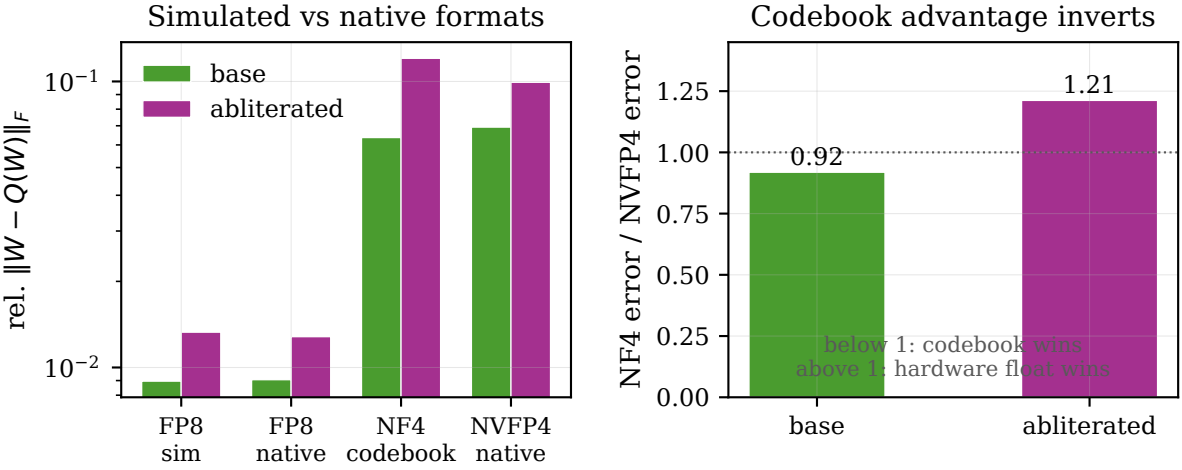
Simulated vs native formats
base
abliterated
10^{-1}
10^{-2}
rel. $\|W - Q(W)\|_F$
FP8 sim
FP8 native
NF4 codebook
NVFP4 native
Codebook advantage inverts
NF4 error / NVFP4 error
1.25
1.00
0.75
0.50
0.25
0.00
0.92
1.21
below 1: codebook wins
above 1: hardware float wins
base
abliterated