

Supplementary Material: Toward Interaction Dynamics — A Predictive Framework for Safe Physical Human–Robot Interaction

Yongyan Cao¹ and Jinshan Tang²

Abstract—This document accompanies the main paper and contains: the full controllability/detectability argument and LMI-based stabilizability proof for the LPV backbone, the parameter table, and additional experiments that supplement, but are not required to follow, the main paper’s core argument — the waypoint-hold benchmark (redundant with Benchmark I’s conclusions), the time-varying-force horizon-prediction study, the human-force magnitude/shape sweep, and the impedance-backbone correction-authority ablation. Table numbers here are prefixed “S” and are independent of the main paper’s numbering.

I. CONTROLLABILITY AND DETECTABILITY OF THE LPV BACKBONE

Remark S1 (Controllability and Detectability). *The LPV system (8) of the main paper is uniformly controllable across all configurations ρ_k in the singularity-free workspace. Since $\Lambda(q)$ in eq. (2) is symmetric positive-definite for all q away from kinematic singularities, $\Lambda^{-1}(q)$ is full rank, so $B_d(\rho_k)$ has full column rank 3 (via its velocity block). With A_d mixing velocity into position, the position rows of B_d and $A_d B_d$ differ by $-\Lambda^{-1}(q)\Delta t^2$ (full rank), so the controllability matrix $C = [B_d \mid A_d B_d]$ has rank 6 for all ρ_k . If $Q \succeq 0$, $R \succ 0$, and $(Q^{1/2}, A_d)$ is detectable, the discrete algebraic Riccati equation (DARE) admits a stabilizing solution at every fixed configuration, and the infinite-horizon LQR gain*

$$K_\infty = (R + B_d^\top P_\infty B_d)^{-1} B_d^\top P_\infty A_d$$

is well-defined everywhere. For the augmented estimator, observability of $[e; \dot{e}]$ together with full column rank of B_d makes the constant disturbance state detectable: if a mode is unobservable from $C = [I_6 \ 0]$, its x_e component is zero; the augmented dynamics then require $B_d d = 0$, hence $d = 0$.

This is the basis for Corollary 1’s DARE-solvability claim and for the LPV-backbone stabilizability result of Sec. II.

II. PROOF OF THEOREM 3 — QUADRATIC STABILIZABILITY OF THE INTERACTION-DYNAMICS BACKBONE

Theorem S1 (Quadratic Stabilizability of the Interaction-Dynamics Backbone). *Consider the LPV interaction dynamics $x_{e,k+1} = A_d x_{e,k} + B_d(\rho_k) F_{mpc,k}$ with constant A_d and $B_d(\rho)$*

as in eq. (8) of the main paper, and suppose the operational-space inverse-inertia stays in a compact polytope over the operating region of interest, $\Lambda^{-1}(q) \in \mathcal{P} = \text{conv}\{L_1, \dots, L_V\}$ (e.g. the entry-wise box with $0 \prec \lambda_{\min} I \preceq \Lambda^{-1}(q) \preceq \lambda_{\max} I$) — a certified bound on $\Lambda^{-1}(q)$, either established analytically over the entire singularity-free workspace or, as instantiated in Remark S3 below, sampled over a specific operating region — with vertex input matrices $B_v = [-\frac{\Delta t^2}{2} L_v; -L_v \Delta t]$ (affine in $\Lambda^{-1}(q)$, so the polytope structure is preserved). If there exist $Q = Q^\top \succ 0$ and $Y \in \mathbb{R}^{3 \times 6}$ such that, for every vertex $v = 1, \dots, V$,

$$\begin{bmatrix} Q & (A_d Q + B_v Y)^\top \\ A_d Q + B_v Y & Q \end{bmatrix} \succ 0, \quad (1)$$

then the fixed state-feedback law $F_{mpc} = K x_e$ with $K = Y Q^{-1}$ makes $V(x) = x^\top P x$, $P = Q^{-1}$, a common quadratic Lyapunov function: $V(x_{e,k+1}) \leq \gamma V(x_{e,k})$ with $\gamma < 1$ for every admissible configuration trajectory $\{\rho_k\} \subset \mathcal{P}$, so this one fixed linear feedback law is exponentially stabilizing uniformly over $\mathcal{P}$ — not only at a frozen configuration. This is a statement about the LPV backbone under a single certified feedback gain, not directly about the finite-horizon receding-horizon MPC actually deployed (see the scope remark below).

Proof. $B_d(\rho)$ is affine in $\Lambda^{-1}(q)[\rho]$, so for any ρ with $\Lambda^{-1}(\rho) = \sum_v \alpha_v L_v$ ($\alpha_v \geq 0$, $\sum_v \alpha_v = 1$) we have $A_d Q + B_d(\rho) Y = \sum_v \alpha_v (A_d Q + B_v Y)$. The block matrix in (1) is affine in this quantity, and the positive-semidefinite cone is convex, so (1) holds for all $\rho \in \mathcal{P}$, not only at the vertices. A Schur complement on (1) gives $(A_d Q + B_d(\rho) Y) Q^{-1} (A_d Q + B_d(\rho) Y)^\top \prec Q$; writing $A_{cl}(\rho) = A_d + B_d(\rho) K$ with $K = Y Q^{-1}$ yields $A_{cl}(\rho) Q A_{cl}(\rho)^\top \prec Q$, i.e. $A_{cl}(\rho)^\top P A_{cl}(\rho) - P \prec 0$ with $P = Q^{-1}$, for all $\rho \in \mathcal{P}$. Hence $V(x) = x^\top P x$ decreases along every trajectory regardless of how ρ_k varies, which is exponential stability of this fixed-gain LPV closed loop. Composing with the detectable integrating-disturbance estimator of Theorem 2 of the main paper, the tracking error is offset-free at each constant-contact equilibrium the trajectory visits, for this fixed-gain closed loop. $\square$

This is the polytope-level counterpart of the per-configuration DARE solvability of Remark S1 and the continuous scheduled law of Corollary 1 of the main paper: it certifies that the interaction-dynamics *representation* — enabled by the constant A_d , which confines all configuration variation to the affine $B_d(\rho)$ and makes (1) a finite vertex program — is

¹Y. Cao is with Voryx Robotics LLC, San Jose, CA 95136, USA (e-mail: yongyancao@gmail.com).

²J. Tang is with the Department of Health Administration and Policy, George Mason University, Fairfax, VA, USA (e-mail: jtang25@gmu.edu).

quadratically stabilizable by a single Lyapunov function over $\mathcal{P}$, under one fixed certified gain.

Scope. Theorem S1 establishes exponential stability of the nominal predictive backbone under one fixed, LMI-certified linear feedback gain — the disturbance-free LPV closed loop $(A_d, B_d(\rho))$, with the input constraint inactive — not workspace-wide stability of the complete deployed controller. In particular it does **not** by itself analyze: the disturbance estimator (offset-free tracking under the Kalman estimator is Theorem 2 of the main paper’s separate result, composed with Theorem S1 only informally, in the last line of the proof above); the finite-horizon receding-horizon re-solve, whose realized policy at each step is the QP’s actual minimizer, not the certified fixed K (the unconstrained QP realizes a member of this same class of linear state feedback, Theorem 1/Corollary 1 of the main paper, but not necessarily the specific certified K); or the safety and passivity filters (Theorem 4, Proposition 2 of the main paper). The complete controller’s closed-loop guarantees are therefore this *collection* of separately-scoped results about different feedback laws, not one monolithic proof that the deployed MPC is workspace-stable.

Remark S2 (Rate-independence and the frozen horizon). *The certificate uses a single, parameter-independent Lyapunov matrix $P = Q^{-1}$ shared by all vertices. A common- P quadratic-stability certificate is robust to arbitrary time variation of $\rho_k \in \mathcal{P}$ — including arbitrarily fast changes — with no assumption on the parameter-variation rate $\|\rho_{k+1} - \rho_k\|$: the Lyapunov decrease holds at every vertex and hence, by convexity of (1) in $\Lambda^{-1}(q)$, for any $\rho_k \in \mathcal{P}$ regardless of how it moves, provided the certified fixed K is what is actually applied. This gives a structural reason, not a proof, for why the frozen- Γ approximation used online (built from the current $B_d(q_k)$ and held over the N -step horizon) is unlikely to be destabilizing: the gap between $B_d(q_k)$ and the true future $B_d(q_{k+i})$ is a bounded variation inside $\mathcal{P}$, and a fixed- K closed loop over $\mathcal{P}$ would not be destabilized by that variation regardless of its rate. This motivates, but does not establish, that the deployed receding-horizon policy — which re-solves a QP rather than applying the certified K — inherits the same robustness; the frozen horizon shapes only the predicted trajectory, while the receding-horizon re-solve keeps the applied first move matched to the current ρ_k , but no result in this paper proves the resulting closed loop shares Theorem S1’s rate-independence.*

Remark S3 (Numerical instantiation of $\mathcal{P}$). *For the FR3, sampling $\Lambda^{-1}(q)$ along the main paper’s §V circular benchmark (4700 samples) gives $\text{eig } \Lambda^{-1}(q) \in [0.059, 0.354] \text{ kg}^{-1}$ (task inertia 2.8–16.9 kg). The resulting entry-wise box has 64 corners in general, but not every corner of an independent per-entry box need be positive-definite; we discard any that are not (none were, here — all 64 corners were confirmed SPD, minimum eigenvalue $\approx 0.023 \text{ kg}^{-1}$ across vertices, comfortably above the regularization floor). This instantiates $\mathcal{P}$ over the sampled operating region traversed by the benchmark trajectory, not a verified bound over the entire singularity-free workspace; extending the certified range to other trajectories or the full workspace would need re-sampling or*

an analytic eigenvalue bound, neither done here. Over this $\mathcal{P}$ ($\Delta t = 10 \text{ ms}$), the minimum-condition-number common- P certificate at guaranteed rate $\rho \leq 0.996$ is feasible, returning a well-conditioned common P ($\text{cond } P \approx 2.2$) with spectral radius ≤ 0.996 and strictly negative Lyapunov increment ($\max \text{eig}(A_{cl}^\top P A_{cl} - P) \approx -5 \times 10^{-3}$) at every vertex, for the certified fixed $K = YQ^{-1}$ — the realized MPC, with its far larger tracking weights and different (receding-horizon) policy, is not shown to converge at this rate, only observed empirically to converge faster. This establishes the qualitative backbone-stabilizability claim rigorously over the sampled region rather than empirically, and is reproducible from the released script (`lmi_workspace_stability_probe.py`).

III. PARAMETERS

Every numeric constant used across the experiments of the main paper (§V) and this supplement is consolidated below, cross-checked against the released code (`simulation/impedance_mpc.py`, `simulation/phri.py`, `cloud_verify/lib/fr3_hardware_i`) rather than restated from memory. Unless a table or figure caption states otherwise, these are the values used throughout.

Two parameter sets are estimator/CBF-internal and are not separately swept: the Kalman noise covariances and the CBF/tank constants (the latter are exercised in the `cloud_verify` hardware-path suite rather than the direct benchmark scripts used for the main paper’s tables).

[†]Benchmark I (Table ??) and Benchmark II (Table III) are run with $k_{ws} = 0$: the driver scripts for those two circular/waypoint benchmarks disable workspace projection so its effect does not confound the controller-to-controller comparison. The 5×10^{-4} default above is what the boundary test (Table ??) actually uses, which is where the mechanism is exercised and discussed.

IV. FOUR-PLANE CIRCLE TRACKING

C5 (MPC + Kalman, 100 Hz QP, 1 kHz inner) is evaluated on four 3-D circle planes, complementing the XZ-plane result of Benchmark I. Table II reports RMSE after the 1.5 s ramp.

Analysis. The MPC maintains sub-0.35 mm RMSE across all planes, demonstrating that the $\Lambda(q)$ -adaptive compliance in the QP (eq. 9 of the main paper) handles the off-diagonal operational-space inertia coupling without gain scheduling — the controller was tuned and validated on the XZ plane alone (Benchmark I), and the other three planes are a held-out generalization check, not a separately re-tuned result.

V. BENCHMARK II — REACH-AND-HOLD UNDER HUMAN PUSH

Scenario. The robot navigates a triangle of three waypoints (A, B, C) in one lap. At each waypoint, 0.8 s after arrival, a directionally varied 15 N push fires for 2 s. The robot must recover and dwell within 35 mm of the target for 1 s before advancing (3 push events, one per waypoint).

Analysis. The static-waypoint hold confirms the same separation seen in Benchmark I, and is included here for completeness rather than as an independent finding. All four

TABLE I
CONTROLLER AND ESTIMATOR PARAMETERS

Parameter	Symbol	Value
Prediction horizon	N	10
MPC sample time (100 Hz)	Δt	10 ms
MPC sample time (500 Hz)	Δt	2 ms
Inner-loop rate	—	1 kHz
Position stage weight	Q_{pos}	$2 \times 10^4 I_3$
Velocity stage weight	Q_{vel}	$50 I_3$
Terminal cost scale	γ	5
Effort weight	R	$10^{-6} I_3$
Corrective-force bound	F_{max}	150 N
FR3 torque limits	τ_{max}	[87, 87, 87, 87, 12, 12, 12] Nm
Λ^{-1} regularization	σ	10^{-6}
Kalman process noise	Q_d	10.0
Kalman obs. noise (pos.)	—	10^{-3}
Kalman obs. noise (vel.)	—	10^{-2}
Orientation stiffness	K_{rot}	20 Nm/rad
Orientation damping	D_{rot}	6 Nm-s/rad
Null-space centering stiffness	k_{null}	10 Nm/rad
Null-space damping	d_{null}	2 Nm-s/rad
Null-space barrier gain	k_b	50 Nm
Barrier activation threshold	η	0.10
Workspace-projection gain	k_{ws}	5×10^{-4} m/(Nm/rad) [†]
Workspace-projection cap	p_{max}	0.06 m
Workspace-projection reg.	ϵ_r	10^{-8}
Backbone stiffness (C8)	K_{bb}	300 N/m
Backbone damping ratio (C8)	ζ_{bb}	1.0 (nominal)
CBF safety margin	ϵ	0.05 rad
CBF contraction rate	α	0.5
CBF slack penalty weight	w_s	10^8
Tank initial energy	E_0	20.0 J
Tank lower bound	E_{min}	0.05 J
Tank upper bound	E_{max}	50.0 J
Human-recharge fraction	γ	0.0
OSQP tolerances	$\epsilon_{\text{abs}}, \epsilon_{\text{rel}}$	10^{-6}
OSQP iteration cap	—	4000
Circular benchmark R, T	—	0.12 m, 8 s
Human step force	F_h	15 N, $t \in [3, 6]$ s
Reference ramp time	T_{ramp}	1.5 s
FR3 neutral pose	q_0	[0, -0.785, 0, -2.356, 0, 1.571, 0.785] rad

TABLE II
FREE-SPACE CIRCLE TRACKING, $R = 12$ CM, $T = 8$ S

Plane	IMP RMSE [mm]	MPC RMSE [mm]	Improvement
XZ sagittal	23.54	0.24	$\times 97$
XY horizontal	25.06	0.33	$\times 77$
YZ frontal	16.25	0.20	$\times 79$
XZ→XY tilted	25.07	0.31	$\times 80$

TABLE III
BENCHMARK II: WAYPOINT-HOLD UNDER DIRECTIONALLY VARIED PUSH

Controller	Waypts	RMS free	RMS cont.	Peak
G1 – Stiff Impedance	3/3	63.6	41.4	47.1
G2 – Pure Admittance	3/3	72.8	190.2	226.6
G3 – Variable Compl.	3/3	69.3	133.5	170.1
MPVIC – Var.-Imp. MPC	3/3	51.2	5.0	6.0
G4 – MPC 100 Hz	3/3	47.9	2.2	2.6
G5 – MPC+K 100 Hz	3/3	47.9	0.6	2.4
G6 – MPC 500 Hz	3/3	51.9	0.8	1.0
G7 – MPC+K 500 Hz	3/3	51.4	0.2	0.8

MPC variants (G4–G7) reach every waypoint with order-of-magnitude lower contact-window deflection than the reactive

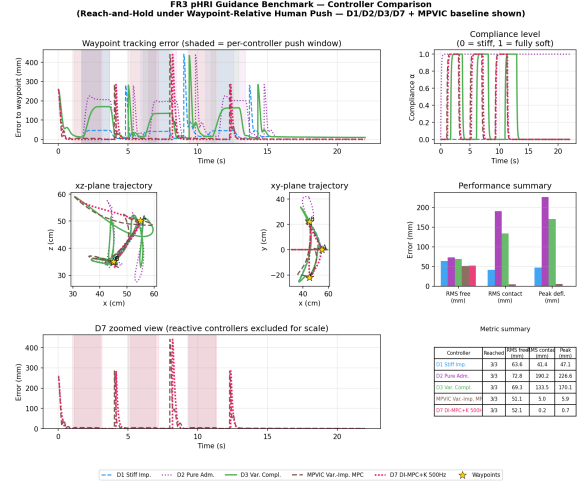


Fig. 1. Benchmark II — reach-and-hold under directionally varied push. For visibility the plot shows D1/D2/D3/D7 (corresponding to G1/G2/G3/G7) plus the predictive variable-impedance MPVIC baseline; Table III reports the full ablation. The final D7 controller reaches every waypoint with sub-millimeter contact-window deflection.

baselines: against the stiff-impedance baseline (G1), the MPC cuts contact-window RMS from 41.4 mm to 2.2 mm (G4) and peak deflection from 47.1 mm to 2.6 mm. Adding the Kalman augmentation improves the contact and free-motion metrics — G5 lowers contact-window RMS from 2.2 mm to 0.6 mm and slightly reduces peak (2.6→2.4 mm) — so unlike a higher impedance gain it carries no peak penalty. Raising the QP rate to 500 Hz then sharpens the first-contact transient further: G7 attains 0.2 mm contact-window RMS and a 0.8 mm peak. The pure-admittance and variable-compliance baselines (G2, G3) yield by design, producing the large 190–134 mm contact-window deflections expected of intentional compliance. The predictive variable-impedance baseline (MPVIC) behaves oppositely to the reactive variable-compliance G3: instead of softening, it stiffens predictively to reject the push, cutting contact-window RMS to 5.0 mm, yet it stays a further order of magnitude above the offset-free G5 (0.6 mm) — the same non-offset-free residual seen in Benchmark I. As in Benchmark I, MPVIC here is our own discrete-stiffness scheduler, not a reproduced published algorithm; see the main paper’s Benchmark I discussion for the corresponding caveat.

VI. TIME-VARYING INTERACTION AND HORIZON-PREDICTION VALIDITY

The benchmarks in the main paper apply constant or step forces. Because the framework targets *interaction* dynamics broadly, we additionally exercise a *time-varying* human force and measure a proxy for the N -step disturbance-prediction RMS ϵ_N of Section III-D of the main paper — the quantity that bounds how well the flat random-walk prediction holds over the horizon. To isolate the effect of the force alone from configuration-driven terms, the robot holds a *static* target while a sinusoidal push $F_z = -A \sin(2\pi ft)$ of fixed amplitude $A = 12$ N and increasing frequency f is applied, sweeping the disturbance rate $L_d = A 2\pi f / \sqrt{2}$. The controller is D1-MPC + Kalman (C5, 100 Hz QP).

TABLE IV
TIME-VARYING FORCE: HORIZON SELF-CONSISTENCY ERROR
(ESTIMATOR PROXY) AND TRACKING

L_d [N/s]	ε_1	ε_N	$\varepsilon_N - \varepsilon_1$	Bound	RMS [mm]
0.0	0.04	0.38	0.34	0.00	0.08
5.3	0.05	0.52	0.46	0.53	0.12
10.7	0.12	1.20	1.08	1.07	0.27
21.3	0.25	2.47	2.22	2.13	0.54
42.7	0.49	4.87	4.38	4.27	1.03

What ε_N actually measures here. Because the true disturbance d_k is not directly logged in this experiment, we use the filtered estimate $\hat{d}_{k|k}$ as its proxy and the flat prediction $\hat{d}_{k|k-N} = \hat{d}_{k-N|k-N}$, so $\varepsilon_N = \text{RMS}_k \|\hat{d}_{k|k} - \hat{d}_{k-N|k-N}\|$ measures the N -step *self-consistency of the estimate*, not the main paper’s eq. (13) prediction error against the true d_k directly — the two agree only to the extent $\hat{d}$ has converged to d . This is visible in the $L_d = 0$ (constant-force) row: the theoretical extrapolation term $L_d N \Delta t$ is exactly zero there, yet the measured $\varepsilon_N - \varepsilon_1 = 0.34$ N is not — that residual is the estimator’s own process-noise jitter accumulated over N steps, a real but different quantity from the extrapolation term. Table IV should therefore be read as evidence *consistent with* the linear-in-rate scaling eq. (13) predicts, not a direct validation against ground truth; a true ground-truth check — computing $d_{a,k}$ from the logged simulation dynamics ($\ddot{e}_k + \Lambda^{-1}(q)F_{\text{mpc},k}$, both already available since the injected force is known) rather than the filtered estimate — is a well-defined follow-up we have not run.

Analysis. The measured horizon-extrapolation gap $\varepsilon_N - \varepsilon_1$ (self-consistency proxy) tracks the bound term $L_d N \Delta t$ to within $\approx 10\%$ across a decade of disturbance rate (0.46 vs. 0.53; 1.08 vs. 1.07; 2.22 vs. 2.13; 4.38 vs. 4.27 N), consistent with the flat-prediction error being *linear in the force rate* as eq. (13) predicts, with a constant-force floor ≈ 0.38 N (the $f = 0$ row) set by the estimate’s process-noise jitter accumulated over the N steps — not itself a prediction-error measurement (see above). Tracking degrades gracefully: the controller holds sub-millimeter error up to $L_d \approx 21$ N/s and ≈ 1 mm at 43 N/s, recovering the offset-free property (Theorem 2 of the main paper) as $f \rightarrow 0$. This is consistent with the disturbance-prediction analysis of the main paper’s Section III-D and the use of the flat random-walk model inside the receding-horizon loop, though a ground-truth (not self-consistency) measurement would be needed to validate it directly; for a *structured* high-rate force (e.g. physiological tremor) the harmonic-internal-model extension of Section III-D would predict that component forward exactly rather than extrapolate it flat. The experiment is reproduced by `time_varying_experiment.py`.

VII. HUMAN-FORCE MAGNITUDE AND SHAPE SWEEP

Benchmark I and §VI fix the force magnitude at 12–15 N. Because the offset-free property (Theorem 2 of the main paper) is independent of the force amplitude, we sweep a sustained (step) push $F_z \in \{5, 10, 15, 20, 25\}$ N on the circular tracking task and report the steady-state and peak tip deflection for classical impedance (D1) and the proposed offset-free

TABLE V
HUMAN-FORCE MAGNITUDE SWEEP (SS / PEAK DEFLECTION, MM)

F_z [N]	5	10	15	20	25
D1 Imp. – SS	26.9	33.7	45.0	58.5	73.1
D1 Imp. – peak	28.4	37.0	51.2	70.1	88.9
D7 – SS	0.021	0.021	0.021	0.021	0.021
D7 – peak	0.29	0.50	0.76	1.02	1.27

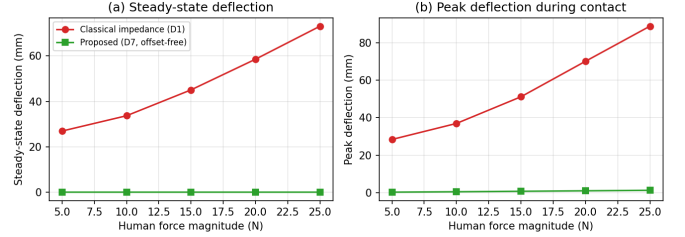


Fig. 2. Human-force magnitude sweep: steady-state (a) and peak (b) tip deflection versus a sustained push, for classical impedance (D1, red) and the proposed offset-free controller (D7, green). The proposed steady-state deflection is invariant to force magnitude (0.021 mm), while classical impedance grows linearly.

controller (D7, DI-MPC + Kalman, 500 Hz); a shape sweep at 15 N (step / linear ramp / 1 Hz sinusoid) complements the time-varying study of §VI.

Analysis. Classical impedance deflects in proportion to the force — the $e_\infty = K_d^{-1}F_h$ bias combined with the dynamic tracking error grows from 27 mm at 5 N to 73 mm at 25 N — whereas the proposed controller holds a **0.021 mm steady-state deflection independent of magnitude**: the integrating disturbance state cancels the force whatever its size, so accuracy no longer trades against the human’s effort. The first-contact peak grows only mildly (0.29 $\rightarrow$ 1.27 mm across 5–25 N), scaling with the force step before $\hat{d}$ converges. Under the three 15 N shapes the proposed controller keeps contact-window RMS at 0.15 mm (step), 0.10 mm (ramp), and 0.40 mm (1 Hz sinusoid) versus 40.9 / 26.0 / 33.0 mm for classical impedance; the sinusoid is the worst case, consistent with §VI — the flat $\dot{d} = 0$ model lags a fast-varying force, which the harmonic internal model of Section III-D of the main paper would recover. Reproduced by `force_sweep.py`.

VIII. CORRECTION-AUTHORITY ROBUSTNESS (IMPEDANCE-BACKBONE ABLATION)

Every controller in the main paper places the entire task-space correction inside one box-constrained decision variable, F_{mpc} : if it is driven toward zero — a tight F_{max} bound, or a horizon step whose predicted torque is unrealizable — the commanded torque degrades to the feedforward term τ_{ff} alone, i.e. zero corrective stiffness. We evaluate an architectural ablation, **C8**, that decouples baseline corrective stiffness from the optimizer: a fixed, positively damped impedance law

$$F_{\text{bb}} = K_{\text{bb}}e + D_{\text{bb}}\dot{e}, \quad K_{\text{bb}} = 300 \text{ N/m},$$

is commanded on every MPC update independent of the QP output ($D_{\text{bb}} = 2\zeta_{\text{bb}}\sqrt{K_{\text{bb}}}$, a nominal unit-effective-mass tuning — $\Lambda^{-1}(q)$ is generally anisotropic, so this is not exact modal-critical damping), and the QP shapes only a bounded additional correction F_{mpc} ($\|F_{\text{mpc}}\|_\infty \leq F_{\text{max}}$)

TABLE VI
CORRECTION-AUTHORITY ABLATION: F_{MAX} SWEEP, RMS / PEAK (MM)

F_{max} [N]	150	20	5	1	0
C7 – RMS cont.	0.15	0.15	317.6	414.0	424.4
C7 – peak	0.77	0.76	412.3	552.5	560.8
C8 – RMS cont.	0.15	0.15	22.5	37.7	41.3
C8 – peak	0.76	0.76	29.8	47.9	51.6

predicted through the backbone dynamics linearized at the current configuration, $A_{\text{cl}} = A_d + B_d(\rho_k)G_{\text{bb}}$. If the QP’s output is driven to exactly zero for any reason, the commanded controller retains this non-zero corrective stiffness instead of reverting to bare feedforward. This is QP-independence, not actuator-limit independence: the **total commanded torque is** $\tau = \tau_{\text{base}} + J_v^T(F_{\text{bb}} + F_{\text{mpc}}) - F_{\text{bb}}$ is not optional and must be included in any torque-feasibility check — and C8 additionally applies the main paper’s eq. (9b) row at *every* horizon step rather than only the first, frozen at the current configuration:

$$-\tau_{\text{max}} \leq \tau_{\text{base}}(0) + J_v^T(q_0)(F_{\text{bb}} + F_{\text{mpc},i}) \leq \tau_{\text{max}}, \quad i = 0, \dots, N-1$$

the frozen-Jacobian horizon-wide extension of (9b) — not implied by (9b)/(9c) alone, and specific to C8, not part of the default (C1–C7) formulation. Freezing $J_v(q_0)$, $\tau_{\text{base}}(0)$ across the horizon is a local approximation, not an exact prediction of future torque feasibility. With this in place, the evidence below supports robustness to loss of **additive QP correction authority** specifically, not a blanket guarantee under arbitrary actuator saturation or solver failure.

Scenario and protocol. Identical to Benchmark I: 12 cm circular reference, 15 N step push, 3 cycles / 24 s, contact-window metrics averaged over all three push events. We sweep the corrective-force bound $F_{\text{max}} \in \{150, 20, 5, 1, 0\}$ N, holding every other parameter fixed, emulating progressively severe loss of additive correction authority; $F_{\text{max}} = 0$ N is the limiting case in which the QP contributes nothing.

Results. Under the normal protocol ($F_{\text{max}} = 150$ N), C8 matches C7 to measurement precision — RMS/contact/peak/SS of 12.66/0.15/0.76/0.022 mm vs. C7’s 12.61/0.15/0.77/0.022 mm (both reproduced under the present codebase for a self-consistent comparison; both agree with the main paper’s Table I C7 row to within a small residual difference from an exact zero-order-hold correction applied after that table was generated). The stress sweep is the key comparison:

Analysis. At $F_{\text{max}} \geq 20$ N there is enough headroom that both controllers are unaffected and C8 costs nothing relative to C7 — the backbone’s restoring term is exactly what the unconstrained QP would already have produced. Below that, C7’s contact-window RMS jumps by roughly three orders of magnitude ($0.15 \rightarrow 424$ mm) the moment the corrective force can no longer supply the needed authority: with F_{mpc} forced toward zero, the commanded torque approaches bare feedforward against the sustained push. **C8 degrades gracefully instead**, settling at 22–41 mm even in the $F_{\text{max}} = 0$ limit — a $10\text{--}14\times$ smaller error than C7 across the curtailed range, and bounded rather than diverging. The offset-free/stability statements of Theorems 1–3 of the main paper are proved for the standard (non-backbone) realization; C8’s additive term retains the

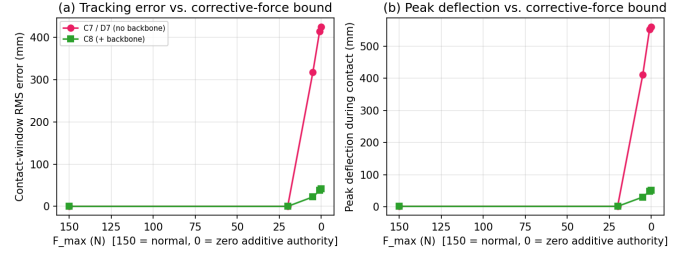


Fig. 3. Correction-authority robustness ablation: contact-window RMS (a) and peak deflection (b) versus the QP’s corrective-force bound F_{max} , for the proposed controller with (C8, green) and without (C7, red) the impedance backbone. C8 degrades gracefully as $F_{\text{max}} \rightarrow 0$ while C7 collapses toward bare feedforward.

same offset-free mechanism (the $-\hat{d}$ centering trick is applied to F_{mpc} , not the backbone), but a formal re-derivation of the theorems for the backbone-augmented closed loop is left to future work. This is an architectural finding about how to *deploy* the predictive layer safely, complementary to and compatible with the energy-tank layer of the main paper’s Section IV-C (which governs coupled-system stability rather than QP-authority loss); it is reported here as a self-contained ablation rather than folded into the main paper’s central narrative. Reproduced by `stable_backbone_comparison.py --n-cycles 3`.