

# Supplementary Material: Compact Offset-Free Interaction-Error MPC with Applied-Torque Constraints for Physical Human–Robot Interaction

Yongyan Cao<sup>1</sup> and Jinshan Tang<sup>2</sup>

**Abstract**—This document accompanies the main paper and contains: the full controllability/detectability argument and LMI-based stabilizability proof for the LPV backbone, the parameter table, and additional experiments that supplement, but are not required to follow, the main paper’s core argument — the waypoint-hold benchmark (redundant with Benchmark 1’s conclusions), the time-varying-force horizon-prediction study, the human-force magnitude/shape sweep, and the impedance-backbone correction-authority ablation. Table numbers here are prefixed “S” and are independent of the main paper’s numbering.

## S1. CONTROLLABILITY AND DETECTABILITY OF THE LPV BACKBONE

**Remark S1** (Controllability and Detectability). *The frozen pair in (8) of the main paper is pointwise controllable at every fixed configuration  $\rho$  in the singularity-free workspace. Since  $\Lambda(q)$  in eq. (2) is symmetric positive-definite for all  $q$  away from kinematic singularities,  $\Lambda^{-1}(q)$  is full rank, so  $B_d(\rho_k)$  has full column rank 3 (via its velocity block). With  $A_d$  mixing velocity into position, the position rows of  $B_d$  and  $A_d B_d$  differ by  $-\Lambda^{-1}(q)\Delta t^2$  (full rank), so the controllability matrix  $\mathcal{C} = [B_d \mid A_d B_d]$  has rank 6 for all  $\rho_k$ . If  $Q \succeq 0$ ,  $R \succ 0$ , and  $(Q^{1/2}, A_d)$  is detectable, the discrete algebraic Riccati equation (DARE) admits a stabilizing solution at every fixed configuration, and the infinite-horizon LQR gain*

$$K_\infty = (R + B_d^\top P_\infty B_d)^{-1} B_d^\top P_\infty A_d$$

*is well-defined everywhere, with the feedback convention  $F_{mpc} = -K_\infty x_e$ . For the augmented estimator, observability of  $[e; \dot{e}]$  together with full column rank of  $B_d$  makes the constant disturbance state detectable: if a mode is unobservable from  $C = [I_6 \ 0]$ , its  $x_e$  component is zero; the augmented dynamics then require  $B_d d = 0$ , hence  $d = 0$ .*

This is the basis for Corollary 1’s DARE-solvability claim and for the LPV-backbone stabilizability result of Sec. S2.

## S2. COMMON-QUADRATIC STABILIZABILITY OF THE SCHEDULED ERROR PREDICTOR

**Theorem S1** (Quadratic Stabilizability of the Scheduled Error Predictor). *Consider the LPV error predictor  $x_{e,k+1} = A_d x_{e,k} + B_d(\rho_k) F_{mpc,k}$  with constant  $A_d$  and  $B_d(\rho)$  as in eq. (8) of the main paper, and suppose the operational-space*

*inverse-inertia stays in a compact polytope over the operating region of interest,  $\Lambda^{-1}(q) \in \mathcal{P} = \text{conv}\{L_1, \dots, L_V\}$  (e.g. the entry-wise box with  $0 \prec \lambda_{\min} I \preceq \Lambda^{-1}(q) \preceq \lambda_{\max} I$ ) — a certified bound on  $\Lambda^{-1}(q)$ , either established analytically over the entire singularity-free workspace or, as instantiated in Remark S3 below, sampled over a specific operating region — with vertex input matrices  $B_v = [-\frac{\Delta t^2}{2} L_v; -L_v \Delta t]$  (affine in  $\Lambda^{-1}(q)$ , so the polytope structure is preserved). If there exist  $Q = Q^\top \succ 0$  and  $Y \in \mathbb{R}^{3 \times 6}$  and a prescribed  $0 < \varrho < 1$  such that, for every vertex  $v = 1, \dots, V$ ,*

$$\begin{bmatrix} \varrho^2 Q & (A_d Q + B_v Y)^\top \\ A_d Q + B_v Y & Q \end{bmatrix} \succ 0, \quad (1)$$

*then the fixed state-feedback law  $F_{mpc} = K x_e$  with  $K = Y Q^{-1}$  makes  $V(x) = x^\top P x$ ,  $P = Q^{-1}$ , a common quadratic Lyapunov function:  $V(x_{e,k+1}) < \varrho^2 V(x_{e,k})$  for every admissible configuration trajectory  $\{\rho_k\} \subset \mathcal{P}$ , so this one fixed linear feedback law is exponentially stabilizing uniformly over  $\mathcal{P}$  — not only at a frozen configuration. This is a statement about the LPV backbone under a single certified feedback gain, not directly about the finite-horizon receding-horizon MPC actually deployed (see the scope remark below).*

*Proof.*  $B_d(\rho)$  is affine in  $\Lambda^{-1}(q)[\rho]$ , so for any  $\rho$  with  $\Lambda^{-1}(\rho) = \sum_v \alpha_v L_v$  ( $\alpha_v \geq 0$ ,  $\sum_v \alpha_v = 1$ ) we have  $A_d Q + B_d(\rho) Y = \sum_v \alpha_v (A_d Q + B_v Y)$ . The block matrix in (1) is affine in this quantity, and the positive-definite cone is convex, so (1) holds for all  $\rho \in \mathcal{P}$ , not only at the vertices. Taking the Schur complement of the lower-right block gives  $(A_d Q + B_d(\rho) Y)^\top Q^{-1} (A_d Q + B_d(\rho) Y) \prec \varrho^2 Q$ . Writing  $A_{cl}(\rho) = A_d + B_d(\rho) K$  with  $K = Y Q^{-1}$  and pre/post-multiplying by  $Q^{-1} = P$  yields  $A_{cl}(\rho)^\top P A_{cl}(\rho) - \varrho^2 P \prec 0$ , for all  $\rho \in \mathcal{P}$ . Hence  $V(x) = x^\top P x$  decreases along every trajectory regardless of how  $\rho_k$  varies, which is exponential stability of this fixed-gain, disturbance-free LPV closed loop.  $\square$

This is the polytope-level counterpart of the per-configuration DARE solvability of Remark S1 and the continuous scheduled law of Corollary 1 of the main paper: it certifies that the interaction-error *representation* — enabled by the constant  $A_d$ , which confines all configuration variation to the affine  $B_d(\rho)$  and makes (1) a finite vertex program — is quadratically stabilizable by a single Lyapunov function over  $\mathcal{P}$ , under one fixed certified gain.

**Scope.** Theorem S1 establishes exponential stability of the nominal predictive backbone under one fixed, LMI-certified

<sup>1</sup>Y. Cao is with Voryx Robotics LLC, San Jose, CA 95136, USA (e-mail: yongyancao@gmail.com).

<sup>2</sup>J. Tang is with the Department of Health Administration and Policy, George Mason University, Fairfax, VA, USA (e-mail: jtang25@gmu.edu).

linear feedback gain — the disturbance-free LPV closed loop  $(A_d, B_d(\rho))$ , with the input constraint inactive — not workspace-wide stability of the complete deployed controller. In particular it does **not** by itself analyze: the disturbance estimator (offset-free tracking under the Kalman estimator is the separately scoped Theorem 2 of the main paper, and is not composed with Theorem S1 here); the finite-horizon receding-horizon re-solve, whose realized policy at each step is the QP’s actual minimizer, not the certified fixed  $K$  (the unconstrained QP realizes a member of this same class of linear state feedback, Theorem 1/Corollary 1 of the main paper, but not necessarily the specific certified  $K$ ); or the safety and passivity filters (Theorem 3, Proposition 2 of the main paper). The complete controller’s closed-loop guarantees are therefore this *collection* of separately-scoped results about different feedback laws, not one monolithic proof that the deployed MPC is workspace-stable.

**Remark S2** (Rate-independence and the frozen horizon). *The certificate uses a single, parameter-independent Lyapunov matrix  $P = Q^{-1}$  shared by all vertices. A common- $P$  quadratic-stability certificate is robust to arbitrary time variation of  $\rho_k \in \mathcal{P}$  — including arbitrarily fast changes — with no assumption on the parameter-variation rate  $\|\rho_{k+1} - \rho_k\|$ : the Lyapunov decrease holds at every vertex and hence, by convexity of (1) in  $\Lambda^{-1}(q)$ , for any  $\rho_k \in \mathcal{P}$  regardless of how it moves, provided the certified fixed  $K$  is what is actually applied. This gives a structural reason, not a proof, for why the frozen- $\Gamma$  approximation used online (built from the current  $B_d(q_k)$  and held over the  $N$ -step horizon) is unlikely to be destabilizing: the gap between  $B_d(q_k)$  and the true future  $B_d(q_{k+i})$  is a bounded variation inside  $\mathcal{P}$ , and a fixed- $K$  closed loop over  $\mathcal{P}$  would not be destabilized by that variation regardless of its rate. This motivates, but does not establish, that the deployed receding-horizon policy — which re-solves a QP rather than applying the certified  $K$  — inherits the same robustness; the frozen horizon shapes only the predicted trajectory, while the receding-horizon re-solve keeps the applied first move matched to the current  $\rho_k$ , but no result in this paper proves the resulting closed loop shares Theorem S1’s rate-independence.*

**Remark S3** (Numerical instantiation of  $\mathcal{P}$ ). *For the FR3, sampling  $\Lambda^{-1}(q)$  along the main paper’s §V circular benchmark (4700 samples) gives  $\text{eig } \Lambda^{-1}(q) \in [0.059, 0.354] \text{ kg}^{-1}$  (task inertia 2.8–16.9 kg). The resulting entry-wise box has 64 corners in general, but not every corner of an independent per-entry box need be positive-definite; we discard any that are not (none were, here — all 64 corners were confirmed SPD, minimum eigenvalue  $\approx 0.023 \text{ kg}^{-1}$  across vertices, comfortably above the regularization floor). Direct entry-wise auditing reports zero containment violation for all 4700 samples. This instantiates  $\mathcal{P}$  over the sampled operating region traversed by the benchmark trajectory, not a verified bound over the entire singularity-free workspace; extending the certified range to other trajectories or the full workspace would need re-sampling or an analytic eigenvalue bound, neither done here. Over this  $\mathcal{P}$  ( $\Delta t = 10 \text{ ms}$ ), the minimum-condition-number common- $P$  certificate at guaranteed rate  $\rho \leq 0.996$  is feasible,*

*returning a well-conditioned common  $P$  ( $\text{cond } P \approx 2.2$ ) with spectral radius  $\leq 0.996$  and strictly negative Lyapunov increment ( $\max \text{eig}(A_{cl}^\top P A_{cl} - P) \approx -5 \times 10^{-3}$ ) at every vertex. For the exact-ZOH model, CLARABEL reports optimal; the target-rate residual  $\max \text{eig}(A_{cl}^\top P A_{cl} - 0.996^2 P)$  is  $-9.0 \times 10^{-7}$  and the minimum eigenvalue of the LMI block is  $9.9 \times 10^{-7}$ . These checks apply for the certified fixed  $K = YQ^{-1}$  — the realized MPC, with its far larger tracking weights and different (receding-horizon) policy, is not shown to converge at this rate, only observed empirically to converge faster. This establishes the qualitative backbone-stabilizability claim rigorously over the sampled region rather than empirically, and is reproducible from the released script (`lmi_workspace_stability_probe.py`).*

### S3. PARAMETERS

Every numeric constant used across the experiments of the main paper (§VI) and this supplement is consolidated below, cross-checked against the released files `simulation/impedance_mpc.py`, `simulation/phri.py`, and `cloud_verify/lib/fr3_hardware_interface.py` rather than restated from memory. Unless a table or figure caption states otherwise, these are the values used throughout.

Two parameter sets are estimator/CBF-internal and are not separately swept: the Kalman noise covariances and the CBF/tank constants (the latter are exercised in the `cloud_verify` hardware-path suite rather than the direct benchmark scripts used for the main paper’s tables).

<sup>†</sup>Benchmarks I and II in the main paper are run with  $k_{ws} = 0$ : the driver scripts for those two circular/waypoint benchmarks disable workspace projection so its effect does not confound the controller-to-controller comparison. The  $5 \times 10^{-4}$  default above is what the boundary test in the main paper actually uses, which is where the mechanism is exercised and discussed.

### S4. FOCUSED FAIR-COMPARISON PROTOCOL

The focused comparison in the main paper separates calibration from testing. Calibration uses one 8 s cycle; after selecting parameters, every reported metric is recomputed in a newly reset environment over three cycles (24 s). No test-cycle metric enters parameter selection. The response-matched impedance first uses  $K_0 = \|F_h\|/\|e_{ss,C4}\| = 5441 \text{ N/m}$ , then evaluates the Cartesian product

$$K/K_0 \in \{0.8, 1.0, 1.2\}, \quad \zeta \in \{0.7, 1.0, 1.3\}.$$

The score is contact-onset trajectory RMSE relative to C4 plus absolute steady-state-error mismatch;  $K = 5441 \text{ N/m}$ ,  $\zeta = 1.3$  is selected. The anti-windup PI grid is

$$K_i \in \{120, 300, 700\}, \quad I_{\max} \in \{0.02, 0.06, 0.12\} \text{ ms},$$

with score  $e_{ss} + 0.25e_{\text{RMS,contact}} + 0.01r_{\text{sat}}$ ; it selects  $K_i = 120$  and  $I_{\max} = 0.02 \text{ ms}$ . The complete 18-run calibration ledger, selected scores, test metrics, QP counts, and saturation diagnostics are stored in `simulation/fair_offset_free_comparison.json` and regenerated by the identically named Python script.

TABLE S1  
CONTROLLER AND ESTIMATOR PARAMETERS

| Parameter                      | Symbol              | Value                                                 |
|--------------------------------|---------------------|-------------------------------------------------------|
| Prediction horizon             | $N$                 | 10                                                    |
| MPC sample time (100 Hz)       | $\Delta t$          | 10 ms                                                 |
| MPC sample time (500 Hz)       | $\Delta t$          | 2 ms                                                  |
| Inner-loop rate                | —                   | 1 kHz                                                 |
| Position stage weight          | $Q_{\text{pos}}$    | $2 \times 10^4 I_3$                                   |
| Velocity stage weight          | $Q_{\text{vel}}$    | $50 I_3$                                              |
| Terminal cost scale            | $\gamma$            | 5                                                     |
| Effort weight                  | $R$                 | $10^{-6} I_3$                                         |
| Corrective-force bound         | $F_{\text{max}}$    | 150 N                                                 |
| FR3 torque limits              | $\tau_{\text{max}}$ | $87 \times 4; 12 \times 3 \text{ Nm}$                 |
| $\Lambda^{-1}$ regularization  | $\sigma$            | $10^{-6}$                                             |
| Kalman process noise           | $Q_d$               | 10.0                                                  |
| Kalman obs. noise (pos.)       | —                   | $10^{-3}$                                             |
| Kalman obs. noise (vel.)       | —                   | $10^{-2}$                                             |
| Orientation stiffness          | $K_{\text{rot}}$    | 20 Nm/rad                                             |
| Orientation damping            | $D_{\text{rot}}$    | 6 Nm·s/rad                                            |
| Null-space centering stiffness | $k_{\text{null}}$   | 10 Nm/rad                                             |
| Null-space damping             | $d_{\text{null}}$   | 2 Nm·s/rad                                            |
| Null-space barrier gain        | $k_b$               | 50 Nm                                                 |
| Barrier activation threshold   | $\eta$              | 0.10                                                  |
| Workspace-projection gain      | $k_{\text{ws}}$     | $5 \times 10^{-4} \text{ m/(Nm/rad)}^\dagger$         |
| Workspace-projection cap       | $p_{\text{max}}$    | 0.06 m                                                |
| Workspace-projection reg.      | $\epsilon_r$        | $10^{-8}$                                             |
| Backbone stiffness (C8)        | $K_{\text{bb}}$     | 300 N/m                                               |
| Backbone damping ratio (C8)    | $\zeta_{\text{bb}}$ | 1.0 (nominal)                                         |
| CBF safety margin              | $\epsilon$          | 0.05 rad                                              |
| CBF contraction rate           | $\alpha$            | 0.5                                                   |
| CBF slack penalty weight       | $w_s$               | $10^8$                                                |
| Tank initial energy            | $E_0$               | 20.0 J                                                |
| Tank lower bound               | $E_{\text{min}}$    | 0.05 J                                                |
| Tank upper bound               | $E_{\text{max}}$    | 50.0 J                                                |
| Human-recharge fraction        | $\gamma$ (tank)     | 0.0                                                   |
| OSQP tolerances                | abs., rel.          | $10^{-6}$                                             |
| OSQP iteration cap             | —                   | 4000                                                  |
| Circular benchmark $R, T$      | —                   | 0.12 m, 8 s                                           |
| Human step force               | $F_h$               | 15 N, $t \in [3, 6] \text{ s}$                        |
| Reference ramp time            | $T_{\text{ramp}}$   | 1.5 s                                                 |
| FR3 neutral pose               | $q_0$               | $[0, -0.785, 0, -2.356, 0, 1.571, 0.785] \text{ rad}$ |

The measured-force comparator uses the response-matched impedance and receives the exact applied simulation wrench through a first-order filter ( $T_f = 50 \text{ ms}$ ), commanding  $-J_v^\top \hat{F}_h$  in the same Cartesian force channel through which  $F_h$  enters. It reaches 1.39 mm total steady-state error (0.50 mm on the

TABLE S2  
FREE-SPACE CIRCLE TRACKING,  $R = 12 \text{ cm}$ ,  $T = 8 \text{ s}$

| Plane         | IMP RMSE [mm] | MPC RMSE [mm] | Improvement |
|---------------|---------------|---------------|-------------|
| XZ sagittal   | 23.54         | 0.24          | $\times 97$ |
| XY horizontal | 25.06         | 0.33          | $\times 77$ |
| YZ frontal    | 16.25         | 0.20          | $\times 79$ |
| XZ→XY tilted  | 25.07         | 0.31          | $\times 80$ |

TABLE S3  
BENCHMARK II: WAYPOINT-HOLD UNDER DIRECTIONALLY VARIED PUSH

| Controller            | Waypts | RMS free    | RMS cont.  | Peak       |
|-----------------------|--------|-------------|------------|------------|
| G1 – Stiff Impedance  | 3/3    | 63.6        | 41.4       | 47.1       |
| G2 – Pure Admittance  | 3/3    | 72.8        | 190.2      | 226.6      |
| G3 – Variable Compl.  | 3/3    | 69.3        | 133.5      | 170.1      |
| MPVIC – Var.-Imp. MPC | 3/3    | 51.2        | 5.0        | 6.0        |
| G4 – MPC 100 Hz       | 3/3    | 47.9        | 2.2        | 2.6        |
| G5 – MPC+K 100 Hz     | 3/3    | <b>47.9</b> | 0.6        | 2.4        |
| G6 – MPC 500 Hz       | 3/3    | 51.9        | 0.8        | 1.0        |
| G7 – MPC+K 500 Hz     | 3/3    | 51.4        | <b>0.2</b> | <b>0.8</b> |

force axis), so it confirms rather than denies that current-step force cancellation rejects a constant load. Unlike C5, however, it assumes a direct force measurement. “Saturation” in this experiment means a raw magnitude-limit excess above  $10^{-3} \text{ Nm}$ . Both MPC variants have zero failed solves in 2400 updates and maximum raw excess below  $2 \times 10^{-5} \text{ Nm}$ ; neither uses the CBF, tank, or torque-rate filter in this focused script.

#### S5. FOUR-PLANE CIRCLE TRACKING

C5 (MPC + Kalman, 100 Hz QP, 1 kHz inner) is evaluated on four 3-D circle planes, complementing the XZ-plane result of Benchmark I. Table S2 reports RMSE after the 1.5 s ramp.

**Analysis.** The MPC maintains sub-0.35 mm RMSE across all planes, demonstrating that the  $\Lambda(q)$ -adaptive compliance in the QP (eq. 9 of the main paper) handles the off-diagonal operational-space inertia coupling without plane-specific gain retuning — the controller was tuned and validated on the XZ plane alone (Benchmark I), and the other three planes are a held-out generalization check, not a separately re-tuned result.

#### S6. BENCHMARK II — REACH-AND-HOLD UNDER HUMAN PUSH

**Scenario.** The robot navigates a triangle of three waypoints (A, B, C) in one lap. At each waypoint, 0.8 s after arrival, a directionally varied 15 N push fires for 2 s. The robot must recover and dwell within 35 mm of the target for 1 s before advancing (3 push events, one per waypoint).

**Analysis.** The static-waypoint hold confirms the same separation seen in Benchmark I, and is included here for completeness rather than as an independent finding. All four MPC variants (G4–G7) reach every waypoint with order-of-magnitude lower contact-window deflection than the reactive baselines: against the stiff-impedance baseline (G1), the MPC cuts contact-window RMS from 41.4 mm to 2.2 mm (G4) and peak deflection from 47.1 mm to 2.6 mm. Adding the Kalman augmentation improves the contact and free-motion metrics — G5 lowers contact-window RMS from 2.2 mm to 0.6 mm and slightly reduces peak (2.6→2.4 mm) — so unlike



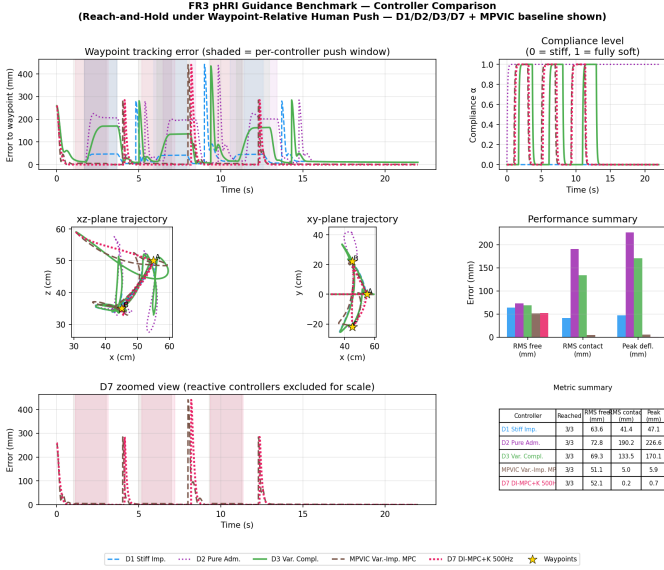


Fig. S1. Benchmark II — reach-and-hold under directionally varied push. For visibility the plot shows D1/D2/D3/D7 (corresponding to G1/G2/G3/G7) plus the predictive variable-impedance MPVIC baseline; Table S3 reports the full ablation. The final D7 controller reaches every waypoint with sub-millimeter contact-window deflection.

a higher impedance gain it carries no peak penalty. Raising the QP rate to 500 Hz then sharpens the first-contact transient further: G7 attains 0.2 mm contact-window RMS and a 0.8 mm peak. The pure-admittance and variable-compliance baselines (G2, G3) yield by design, producing the large 190–134 mm contact-window deflections expected of intentional compliance. The predictive variable-impedance baseline (MPVIC) behaves oppositely to the reactive variable-compliance G3: instead of softening, it stiffens predictively to reject the push, cutting contact-window RMS to 5.0 mm, yet it stays a further order of magnitude above the offset-free G5 (0.6 mm) — the same non-offset-free residual seen in Benchmark I. As in Benchmark I, MPVIC here is our own discrete-stiffness scheduler, not a reproduced published algorithm; see the main paper’s Benchmark I discussion for the corresponding caveat.

## S7. TIME-VARYING INTERACTION AND HORIZON-PREDICTION VALIDITY

The benchmarks in the main paper apply constant or step forces. Because the framework targets *interaction* dynamics broadly, we additionally exercise a *time-varying* human force and measure the  $N$ -step disturbance-prediction RMS  $\varepsilon_N$  of Section III-D of the main paper — the quantity that bounds how well the flat random-walk prediction holds over the horizon. To reduce configuration-driven variation, the robot holds a *static* target while a sinusoidal push  $F_z = -A \sin(2\pi ft)$  of fixed amplitude  $A = 12$  N and increasing frequency  $f$  is applied, sweeping the disturbance rate  $A2\pi f$ , the injected sinusoid’s peak derivative. Because the theorem concerns the aggregate disturbance, the table uses the reconstructed-log rate  $L_{d,\text{emp}} = \max_k \|d_{k+1} - d_k\|_2 / \Delta t$ . The controller is DI-MPC + Kalman (C5, 100 Hz QP).

**Direct ground-truth metric.** At each manager instant we compute the simulator acceleration from the applied, torque-

TABLE S4  
TIME-VARYING FORCE: DIRECT GROUND-TRUTH PREDICTION ERROR AND TRACKING

| $L_{d,\text{emp}}$ [N/s] | $e_K$ | $\varepsilon_1$ | $\varepsilon_N$ | Bound | RMS [mm] |
|--------------------------|-------|-----------------|-----------------|-------|----------|
| 0.51                     | 2.20  | 2.20            | 2.20            | 2.25  | 0.08     |
| 7.57                     | 0.88  | 0.90            | 1.13            | 1.64  | 0.12     |
| 15.13                    | 2.45  | 2.50            | 3.08            | 3.97  | 0.26     |
| 30.44                    | 4.51  | 4.62            | 5.94            | 7.55  | 0.54     |
| 61.45                    | 5.07  | 5.36            | 8.38            | 11.22 | 1.04     |

limited input and the rigid-body dynamics, then reconstruct

$$d_{\text{acc},k} = \ddot{e}_k + \Lambda^{-1}(q_k)F_{\text{mpc},k}, \quad d_k = -\Lambda(q_k)d_{\text{acc},k}.$$

For the flat prediction made at origin  $k$ , the direct metric is  $\varepsilon_i = \text{RMS}_k \|d_{k+i} - \hat{d}_{k|k}\|_2$ . We also report  $e_K = \text{RMS}_k \|d_k - \hat{d}_{k|k}\|_2$ . By Minkowski’s inequality, the pointwise rate assumption in the main paper’s horizon-prediction bound gives  $\varepsilon_N \leq e_K + L_d N \Delta t$ ; Table S4 evaluates it with  $L_d = L_{d,\text{emp}}$ . Origins are restricted to the settled portion of the force window and all  $N$  target samples remain inside that window (704 origins per row).

**Analysis.** The directly measured  $N$ -step error stays below the RMS bound in every tested row. In the constant injected-force row,  $L_{d,\text{emp}} = 0.51$  N/s captures the small variation of the other aggregate residual terms, giving a 2.25 N bound versus  $\varepsilon_N = 2.20$  N. This does not claim zero estimator error. In that row, the mean error-vector norm is 0.74 N and zero-mean fluctuation RMS is 2.07 N; hence 2.20 N is primarily fluctuation, not steady bias, while closed-loop position RMS remains 0.08 mm. As frequency increases,  $\varepsilon_N$  rises from 1.13 to 8.38 N while remaining below the corresponding 1.64–11.22 N bounds. Tracking degrades gradually: it remains below 0.6 mm through  $L_{d,\text{emp}} = 30.44$  N/s and reaches 1.04 mm at 61.45 N/s. These data directly check that bound for the stated simulator protocol; they do not establish the same bound under unmodelled contact dynamics, sensor delay, or measurement noise. For a *structured* high-rate force (e.g. physiological tremor) the harmonic-internal-model extension of Section III-D would predict that component forward exactly rather than extrapolate it flat. The experiment and its machine-readable output are reproduced by `time_varying_experiment.py` and `time_varying_ground_truth_results.json`.

## S8. HUMAN-FORCE MAGNITUDE AND SHAPE SWEEP

Benchmark I and §S7 fix the force magnitude at 12–15 N. Because the offset-free property (Theorem 2 of the main paper) is independent of the force amplitude, we sweep a sustained (step) push  $F_z \in \{5, 10, 15, 20, 25\}$  N on the circular tracking task and report the steady-state and peak tip deflection for classical impedance (D1) and the proposed offset-free controller (D7, DI-MPC + Kalman, 500 Hz); a shape sweep at 15 N (step / linear ramp / 1 Hz sinusoid) complements the time-varying study of §S7.

**Analysis.** Classical impedance deflects in proportion to the force — the  $e_\infty = K_d^{-1}F_h$  bias combined with the dynamic tracking error grows from 27 mm at 5 N to 73 mm at 25 N — whereas the proposed controller holds a **0.021 mm steady-state deflection independent of magnitude over the tested 5–25 N unsaturated range**: the integrating disturbance state

TABLE S5  
HUMAN-FORCE MAGNITUDE SWEEP (SS / PEAK DEFLECTION, MM)

| $F_z$ [N]        | 5            | 10           | 15           | 20           | 25           |
|------------------|--------------|--------------|--------------|--------------|--------------|
| D1 Imp. – SS     | 26.9         | 33.7         | 45.0         | 58.5         | 73.1         |
| D1 Imp. – peak   | 28.4         | 37.0         | 51.2         | 70.1         | 88.9         |
| <b>D7 – SS</b>   | <b>0.021</b> | <b>0.021</b> | <b>0.021</b> | <b>0.021</b> | <b>0.021</b> |
| <b>D7 – peak</b> | <b>0.29</b>  | <b>0.50</b>  | <b>0.76</b>  | <b>1.02</b>  | <b>1.27</b>  |

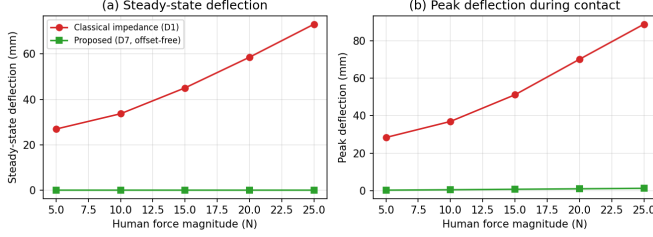


Fig. S2. Human-force magnitude sweep: steady-state (a) and peak (b) tip deflection versus a sustained push, for classical impedance (D1, red) and the proposed offset-free controller (D7, green). The proposed steady-state deflection is invariant to force magnitude (0.021 mm), while classical impedance grows linearly.

cancels the sustained force in this range, so accuracy no longer trades against the human’s effort. The first-contact peak grows only mildly (0.29 → 1.27 mm across 5–25 N), scaling with the force step before  $\hat{d}$  converges. Under the three 15 N shapes the proposed controller keeps contact-window RMS at 0.15 mm (step), 0.10 mm (ramp), and 0.40 mm (1 Hz sinusoid) versus 40.9 / 26.0 / 33.0 mm for classical impedance; the sinusoid is the worst case, consistent with §S7 — the flat  $\hat{d} = 0$  model lags a fast-varying force, which the harmonic internal model of Section III-D of the main paper would recover. Reproduced by `force_sweep.py`.

#### S9. CORRECTION-AUTHORITY ROBUSTNESS (IMPEDANCE-BACKBONE ABLATION)

Every controller in the main paper places the entire task-space correction inside one box-constrained decision variable,  $F_{\text{mpc}}$ : if it is driven toward zero — a tight  $F_{\text{max}}$  bound, or a horizon step whose predicted torque is unrealizable — the commanded torque degrades to the feedforward term  $\tau_{\text{ff}}$  alone, i.e. zero corrective stiffness. We evaluate an architectural ablation, **C8**, that decouples baseline corrective stiffness from the optimizer: a fixed, positively damped impedance law

$$F_{\text{bb}} = K_{\text{bb}}e + D_{\text{bb}}\dot{e}, \quad K_{\text{bb}} = 300 \text{ N/m},$$

is commanded on every MPC update independent of the QP output ( $D_{\text{bb}} = 2\zeta_{\text{bb}}\sqrt{K_{\text{bb}}}$ , a nominal unit-effective-mass tuning —  $\Lambda^{-1}(q)$  is generally anisotropic, so this is not exact modal-critical damping), and the QP shapes only a bounded additional correction  $F_{\text{mpc}}$  ( $\|F_{\text{mpc}}\|_{\infty} \leq F_{\text{max}}$ ) predicted through the backbone dynamics linearized at the current configuration,  $A_{\text{cl}} = A_d + B_d(\rho_k)G_{\text{bb}}$ . If the QP’s output is driven to exactly zero for any reason, the commanded controller retains this non-zero corrective stiffness instead of reverting to bare feedforward. This is QP-independence, not actuator-limit independence: the **total commanded torque** is  $\tau = \tau_{\text{base}} + J_v^T(F_{\text{bb}} + F_{\text{mpc}}) - F_{\text{bb}}$  is not optional and must be included in any torque-feasibility check — and C8 additionally

TABLE S6  
CORRECTION-AUTHORITY ABLATION:  $F_{\text{MAX}}$  SWEEP, RMS / PEAK (MM)

| $F_{\text{max}}$ [N]  | 150         | 20          | 5           | 1           | 0            |
|-----------------------|-------------|-------------|-------------|-------------|--------------|
| C7 – RMS cont.        | 0.15        | 0.15        | 317.7       | 416.0       | 430.0        |
| C7 – peak             | 0.77        | 0.76        | 412.2       | 554.2       | 565.9        |
| <b>C8 – RMS cont.</b> | <b>0.15</b> | <b>0.15</b> | <b>41.3</b> | <b>69.8</b> | <b>78.6</b>  |
| <b>C8 – peak</b>      | <b>0.77</b> | <b>0.76</b> | <b>53.7</b> | <b>95.9</b> | <b>109.4</b> |

applies the main paper’s eq. (9b) row at *every* horizon step rather than only the first, frozen at the current configuration:

$$\begin{aligned} -\tau_{\text{max}} &\leq \tau_{\text{base}}(0) + J_v^T(q_0)(F_{\text{bb}} + F_{\text{mpc},i}) \\ &\leq \tau_{\text{max}}, \quad i = 0, \dots, N-1, \end{aligned}$$

the frozen-Jacobian horizon-wide extension of (9b) — not implied by (9b)/(9c) alone, and specific to C8, not part of the default (C1–C7) formulation. Freezing  $J_v(q_0)$ ,  $\tau_{\text{base}}(0)$  across the horizon is a local approximation, not an exact prediction of future torque feasibility. With this in place, the evidence below supports robustness to loss of **additive QP correction authority** specifically, not a blanket guarantee under arbitrary actuator saturation or solver failure.

**Scenario and protocol.** Identical to Benchmark I: 12 cm circular reference, 15 N step push, 3 cycles / 24 s, contact-window metrics averaged over all three push events. We sweep the corrective-force bound  $F_{\text{max}} \in \{150, 20, 5, 1, 0\}$  N, holding every other parameter fixed, emulating progressively severe loss of additive correction authority;  $F_{\text{max}} = 0$  N is the limiting case in which the QP contributes nothing.

**Results.** Under the normal protocol ( $F_{\text{max}} = 150$  N), C8 matches C7 to measurement precision: RMS/contact/peak/SS is 12.78/0.15/0.77/0.022 mm versus 12.62/0.15/0.77/0.023 mm. The stress sweep is the relevant comparison:

**Analysis.** At  $F_{\text{max}} \geq 20$  N there is enough headroom that both controllers are unaffected and C8 costs nothing relative to C7 — the backbone’s restoring term is exactly what the unconstrained QP would already have produced. Below that, C7’s contact-window RMS jumps by roughly three orders of magnitude (0.15 → 430 mm) the moment the corrective force can no longer supply the needed authority: with  $F_{\text{mpc}}$  forced toward zero, the commanded torque approaches bare feedforward against the sustained push. **C8 degrades more gracefully over the tested 24 s protocol**, reaching 41–79 mm even in the  $F_{\text{max}} = 0$  case — a 5.5–7.7× smaller error than C7 across the curtailed range. This finite-duration result is not a boundedness proof. The impedance-equivalence and offset-free statements of Theorems 1–2 of the main paper are proved for the standard (non-backbone) realization; C8’s additive term retains the same offset-free mechanism, but its formal re-derivation is left to future work. This deployment ablation is distinct from the energy tank, which addresses coupled-system stability rather than QP-authority loss. Reproduced by `stable_backbone_comparison.py --n-cycles 3`.