

Supplementary Material: Compact Offset-Free Interaction-Error MPC with Applied-Torque Constraints for Physical Human–Robot Interaction

Yongyan Cao¹ and Jinshan Tang²

Abstract—This document accompanies the main paper and contains: the full controllability/detectability argument and LMI-based stabilizability proof for the LPV backbone, the parameter table, and additional experiments that supplement, but are not required to follow, the main paper’s core argument — the waypoint-hold benchmark (redundant with Benchmark 1’s conclusions), the time-varying-force horizon-prediction study, the human-force magnitude/shape sweep, and the impedance-backbone correction-authority ablation. Table numbers here are prefixed “S” and are independent of the main paper’s numbering.

I. CONTROLLABILITY AND DETECTABILITY OF THE LPV BACKBONE

Remark S1 (Controllability and Detectability). *The LPV system (8) of the main paper is uniformly controllable across all configurations ρ_k in the singularity-free workspace. Since $\Lambda(q)$ in eq. (2) is symmetric positive-definite for all q away from kinematic singularities, $\Lambda^{-1}(q)$ is full rank, so $B_d(\rho_k)$ has full column rank 3 (via its velocity block). With A_d mixing velocity into position, the position rows of B_d and $A_d B_d$ differ by $-\Lambda^{-1}(q)\Delta t^2$ (full rank), so the controllability matrix $C = [B_d \mid A_d B_d]$ has rank 6 for all ρ_k . If $Q \succeq 0$, $R \succ 0$, and $(Q^{1/2}, A_d)$ is detectable, the discrete algebraic Riccati equation (DARE) admits a stabilizing solution at every fixed configuration, and the infinite-horizon LQR gain*

$$K_\infty = (R + B_d^\top P_\infty B_d)^{-1} B_d^\top P_\infty A_d$$

is well-defined everywhere. For the augmented estimator, observability of $[e; \dot{e}]$ together with full column rank of B_d makes the constant disturbance state detectable: if a mode is unobservable from $C = [I_6 \ 0]$, its x_e component is zero; the augmented dynamics then require $B_d d = 0$, hence $d = 0$.

This is the basis for Corollary 1’s DARE-solvability claim and for the LPV-backbone stabilizability result of Sec. II.

II. COMMON-QUADRATIC STABILIZABILITY OF THE SCHEDULED ERROR PREDICTOR

Theorem S1 (Quadratic Stabilizability of the Scheduled Error Predictor). *Consider the LPV error predictor $x_{e,k+1} = A_d x_{e,k} + B_d(\rho_k) F_{mpc,k}$ with constant A_d and $B_d(\rho)$ as in eq. (8) of the main paper, and suppose the operational-space inverse-inertia stays in a compact polytope over the operating*

region of interest, $\Lambda^{-1}(q) \in \mathcal{P} = \text{conv}\{L_1, \dots, L_V\}$ (e.g. the entry-wise box with $0 \prec \lambda_{\min} I \preceq \Lambda^{-1}(q) \preceq \lambda_{\max} I$) — a certified bound on $\Lambda^{-1}(q)$, either established analytically over the entire singularity-free workspace or, as instantiated in Remark S3 below, sampled over a specific operating region — with vertex input matrices $B_v = [-\frac{\Delta t^2}{2} L_v; -L_v \Delta t]$ (affine in $\Lambda^{-1}(q)$, so the polytope structure is preserved). If there exist $Q = Q^\top \succ 0$ and $Y \in \mathbb{R}^{3 \times 6}$ and a prescribed $0 < \varrho < 1$ such that, for every vertex $v = 1, \dots, V$,

$$\begin{bmatrix} \varrho^2 Q & (A_d Q + B_v Y)^\top \\ A_d Q + B_v Y & Q \end{bmatrix} \succ 0, \quad (1)$$

then the fixed state-feedback law $F_{mpc} = K x_e$ with $K = Y Q^{-1}$ makes $V(x) = x^\top P x$, $P = Q^{-1}$, a common quadratic Lyapunov function: $V(x_{e,k+1}) < \varrho^2 V(x_{e,k})$ for every admissible configuration trajectory $\{\rho_k\} \subset \mathcal{P}$, so this one fixed linear feedback law is exponentially stabilizing uniformly over $\mathcal{P}$ — not only at a frozen configuration. This is a statement about the LPV backbone under a single certified feedback gain, not directly about the finite-horizon receding-horizon MPC actually deployed (see the scope remark below).

Proof. $B_d(\rho)$ is affine in $\Lambda^{-1}(q)[\rho]$, so for any ρ with $\Lambda^{-1}(\rho) = \sum_v \alpha_v L_v$ ($\alpha_v \geq 0$, $\sum_v \alpha_v = 1$) we have $A_d Q + B_d(\rho) Y = \sum_v \alpha_v (A_d Q + B_v Y)$. The block matrix in (1) is affine in this quantity, and the positive-definite cone is convex, so (1) holds for all $\rho \in \mathcal{P}$, not only at the vertices. Taking the Schur complement of the lower-right block gives $(A_d Q + B_d(\rho) Y)^\top Q^{-1} (A_d Q + B_d(\rho) Y) \prec \varrho^2 Q$. Writing $A_{cl}(\rho) = A_d + B_d(\rho) K$ with $K = Y Q^{-1}$ and pre/post-multiplying by $Q^{-1} = P$ yields $A_{cl}(\rho)^\top P A_{cl}(\rho) - \varrho^2 P \prec 0$, for all $\rho \in \mathcal{P}$. Hence $V(x) = x^\top P x$ decreases along every trajectory regardless of how ρ_k varies, which is exponential stability of this fixed-gain LPV closed loop. Composing with the detectable integrating-disturbance estimator of Theorem 2 of the main paper, the tracking error is offset-free at each constant-contact equilibrium the trajectory visits, *for this fixed-gain closed loop.* $\square$

This is the polytope-level counterpart of the per-configuration DARE solvability of Remark S1 and the continuous scheduled law of Corollary 1 of the main paper: it certifies that the interaction-error *representation* — enabled by the constant A_d , which confines all configuration variation to the affine $B_d(\rho)$ and makes (1) a finite vertex program — is quadratically stabilizable by a single Lyapunov function over $\mathcal{P}$, under one fixed certified gain.

¹Y. Cao is with Voryx Robotic LLC, San Jose, CA 95136, USA (e-mail: yongyancao@gmail.com).

²J. Tang is with the Department of Health Administration and Policy, George Mason University, Fairfax, VA, USA (e-mail: jtang25@gmu.edu).

Scope. Theorem S1 establishes exponential stability of the nominal predictive backbone under one fixed, LMI-certified linear feedback gain — the disturbance-free LPV closed loop $(A_d, B_d(\rho))$, with the input constraint inactive — not workspace-wide stability of the complete deployed controller. In particular it does **not** by itself analyze: the disturbance estimator (offset-free tracking under the Kalman estimator is Theorem 2 of the main paper’s separate result, composed with Theorem S1 only informally, in the last line of the proof above); the finite-horizon receding-horizon re-solve, whose realized policy at each step is the QP’s actual minimizer, not the certified fixed K (the unconstrained QP realizes a member of this same class of linear state feedback, Theorem 1/Corollary 1 of the main paper, but not necessarily the specific certified K); or the safety and passivity filters (Theorem 3, Proposition 2 of the main paper). The complete controller’s closed-loop guarantees are therefore this *collection* of separately-scoped results about different feedback laws, not one monolithic proof that the deployed MPC is workspace-stable.

Remark S2 (Rate-independence and the frozen horizon). *The certificate uses a single, parameter-independent Lyapunov matrix $P = Q^{-1}$ shared by all vertices. A common- P quadratic-stability certificate is robust to arbitrary time variation of $\rho_k \in \mathcal{P}$ — including arbitrarily fast changes — with no assumption on the parameter-variation rate $\|\rho_{k+1} - \rho_k\|$: the Lyapunov decrease holds at every vertex and hence, by convexity of (1) in $\Lambda^{-1}(q)$, for any $\rho_k \in \mathcal{P}$ regardless of how it moves, provided the certified fixed K is what is actually applied. This gives a structural reason, not a proof, for why the frozen- Γ approximation used online (built from the current $B_d(q_k)$ and held over the N -step horizon) is unlikely to be destabilizing: the gap between $B_d(q_k)$ and the true future $B_d(q_{k+i})$ is a bounded variation inside $\mathcal{P}$, and a fixed- K closed loop over $\mathcal{P}$ would not be destabilized by that variation regardless of its rate. This motivates, but does not establish, that the deployed receding-horizon policy — which re-solves a QP rather than applying the certified K — inherits the same robustness; the frozen horizon shapes only the predicted trajectory, while the receding-horizon re-solve keeps the applied first move matched to the current ρ_k , but no result in this paper proves the resulting closed loop shares Theorem S1’s rate-independence.*

Remark S3 (Numerical instantiation of $\mathcal{P}$). *For the FR3, sampling $\Lambda^{-1}(q)$ along the main paper’s §V circular benchmark (4700 samples) gives $\text{eig } \Lambda^{-1}(q) \in [0.059, 0.354] \text{ kg}^{-1}$ (task inertia 2.8–16.9 kg). The resulting entry-wise box has 64 corners in general, but not every corner of an independent per-entry box need be positive-definite; we discard any that are not (none were, here — all 64 corners were confirmed SPD, minimum eigenvalue $\approx 0.023 \text{ kg}^{-1}$ across vertices, comfortably above the regularization floor). Direct entry-wise auditing reports zero containment violation for all 4700 samples. This instantiates $\mathcal{P}$ over the sampled operating region traversed by the benchmark trajectory, not a verified bound over the entire singularity-free workspace; extending the certified range to other trajectories or the full workspace would need re-sampling or an analytic eigenvalue bound, neither done here.*

Over this $\mathcal{P}$ ($\Delta t = 10 \text{ ms}$), the minimum-condition-number common- P certificate at guaranteed rate $\rho \leq 0.996$ is feasible, returning a well-conditioned common P ($\text{cond } P \approx 2.2$) with spectral radius ≤ 0.996 and strictly negative Lyapunov increment ($\max \text{eig}(A_{cl}^\top P A_{cl} - P) \approx -5 \times 10^{-3}$) at every vertex. For the exact-ZOH model, CLARABEL reports optimal; the target-rate residual $\max \text{eig}(A_{cl}^\top P A_{cl} - 0.996^2 P)$ is -9.0×10^{-7} and the minimum eigenvalue of the LMI block is 9.9×10^{-7} . These checks apply for the certified fixed $K = YQ^{-1}$ — the realized MPC, with its far larger tracking weights and different (receding-horizon) policy, is not shown to converge at this rate, only observed empirically to converge faster. This establishes the qualitative backbone-stabilizability claim rigorously over the sampled region rather than empirically, and is reproducible from the released script (`lmi_workspace_stability_probe.py`).

III. PARAMETERS

Every numeric constant used across the experiments of the main paper (§VI) and this supplement is consolidated below, cross-checked against the released files `simulation/impedance_mpc.py`, `simulation/phri.py`, and `cloud_verify/lib/fr3_hardware_interface.py` rather than restated from memory. Unless a table or figure caption states otherwise, these are the values used throughout.

Two parameter sets are estimator/CBF-internal and are not separately swept: the Kalman noise covariances and the CBF/tank constants (the latter are exercised in the `cloud_verify` hardware-path suite rather than the direct benchmark scripts used for the main paper’s tables).

[†]Benchmarks I and II in the main paper are run with $k_{ws} = 0$: the driver scripts for those two circular/waypoint benchmarks disable workspace projection so its effect does not confound the controller-to-controller comparison. The 5×10^{-4} default above is what the boundary test in the main paper actually uses, which is where the mechanism is exercised and discussed.

IV. FOCUSED FAIR-COMPARISON PROTOCOL

The focused comparison in the main paper separates calibration from testing. Calibration uses one 8 s cycle; after selecting parameters, every reported metric is recomputed in a newly reset environment over three cycles (24 s). No test-cycle metric enters parameter selection. The response-matched impedance first uses $K_0 = \|F_h\|/\|e_{ss,C4}\| = 5441 \text{ N/m}$, then evaluates the Cartesian product

$$K/K_0 \in \{0.8, 1.0, 1.2\}, \quad \zeta \in \{0.7, 1.0, 1.3\}.$$

The score is contact-onset trajectory RMSE relative to C4 plus absolute steady-state-error mismatch; $K = 5441 \text{ N/m}$, $\zeta = 1.3$ is selected. The anti-windup PI grid is

$$K_i \in \{120, 300, 700\}, \quad I_{\max} \in \{0.02, 0.06, 0.12\} \text{ ms},$$

with score $e_{ss} + 0.25e_{\text{RMS,contact}} + 0.01r_{\text{sat}}$; it selects $K_i = 120$ and $I_{\max} = 0.02 \text{ ms}$. The complete 18-run calibration ledger, selected scores, test metrics, QP counts, and saturation diagnostics are stored in `simulation/fair_offset_`

TABLE I
CONTROLLER AND ESTIMATOR PARAMETERS

Parameter	Symbol	Value
Prediction horizon	N	10
MPC sample time (100 Hz)	Δt	10 ms
MPC sample time (500 Hz)	Δt	2 ms
Inner-loop rate	—	1 kHz
Position stage weight	Q_{pos}	$2 \times 10^4 I_3$
Velocity stage weight	Q_{vel}	$50 I_3$
Terminal cost scale	γ	5
Effort weight	R	$10^{-6} I_3$
Corrective-force bound	F_{max}	150 N
FR3 torque limits	τ_{max}	$87 \times 4; 12 \times 3 \text{ Nm}$
Λ^{-1} regularization	σ	10^{-6}
Kalman process noise	Q_d	10.0
Kalman obs. noise (pos.)	—	10^{-3}
Kalman obs. noise (vel.)	—	10^{-2}
Orientation stiffness	K_{rot}	20 Nm/rad
Orientation damping	D_{rot}	6 Nm·s/rad
Null-space centering stiffness	k_{null}	10 Nm/rad
Null-space damping	d_{null}	2 Nm·s/rad
Null-space barrier gain	k_b	50 Nm
Barrier activation threshold	η	0.10
Workspace-projection gain	k_{ws}	$5 \times 10^{-4} \text{ m/(Nm/rad)}^\dagger$
Workspace-projection cap	p_{max}	0.06 m
Workspace-projection reg.	ϵ_r	10^{-8}
Backbone stiffness (C8)	K_{bb}	300 N/m
Backbone damping ratio (C8)	ζ_{bb}	1.0 (nominal)
CBF safety margin	ϵ	0.05 rad
CBF contraction rate	α	0.5
CBF slack penalty weight	w_s	10^8
Tank initial energy	E_0	20.0 J
Tank lower bound	E_{min}	0.05 J
Tank upper bound	E_{max}	50.0 J
Human-recharge fraction	γ (tank)	0.0
OSQP tolerances	abs., rel.	10^{-6}
OSQP iteration cap	—	4000
Circular benchmark R, T	—	0.12 m, 8 s
Human step force	F_h	15 N, $t \in [3, 6] \text{ s}$
Reference ramp time	T_{ramp}	1.5 s
FR3 neutral pose	q_0	$[0, -0.785, 0, -2.356, 0, 1.571, 0.785] \text{ rad}$

free_comparison.json and regenerated by the identically named Python script.

The measured-force comparator uses the response-matched impedance and receives the exact applied simulation wrench through a first-order filter ($T_f = 50 \text{ ms}$), commanding $-J_v^T \hat{F}_h$

TABLE II
FREE-SPACE CIRCLE TRACKING, $R = 12 \text{ cm}$, $T = 8 \text{ s}$

Plane	IMP RMSE [mm]	MPC RMSE [mm]	Improvement
XZ sagittal	23.54	0.24	$\times 97$
XY horizontal	25.06	0.33	$\times 77$
YZ frontal	16.25	0.20	$\times 79$
XZ→XY tilted	25.07	0.31	$\times 80$

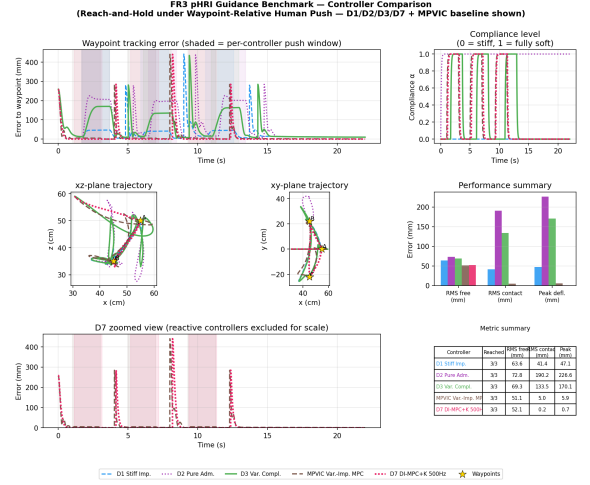


Fig. 1. Benchmark II — reach-and-hold under directionally varied push. For visibility the plot shows D1/D2/D3/D7 (corresponding to G1/G2/G3/G7) plus the predictive variable-impedance MPVIC baseline; Table III reports the full ablation. The final D7 controller reaches every waypoint with sub-millimeter contact-window deflection.

in the same Cartesian force channel through which F_h enters. It reaches 1.39 mm total steady-state error (0.50 mm on the force axis), so it confirms rather than denies that current-step force cancellation rejects a constant load. Unlike C5, however, it assumes a direct force measurement. “Saturation” in this experiment means a raw magnitude-limit excess above 10^{-3} Nm . Both MPC variants have zero failed solves in 2400 updates and maximum raw excess below $2 \times 10^{-5} \text{ Nm}$; neither uses the CBF, tank, or torque-rate filter in this focused script.

V. FOUR-PLANE CIRCLE TRACKING

C5 (MPC + Kalman, 100 Hz QP, 1 kHz inner) is evaluated on four 3-D circle planes, complementing the XZ-plane result of Benchmark I. Table II reports RMSE after the 1.5 s ramp.

Analysis. The MPC maintains sub-0.35 mm RMSE across all planes, demonstrating that the $\Lambda(q)$ -adaptive compliance in the QP (eq. 9 of the main paper) handles the off-diagonal operational-space inertia coupling without gain scheduling — the controller was tuned and validated on the XZ plane alone (Benchmark I), and the other three planes are a held-out generalization check, not a separately re-tuned result.

VI. BENCHMARK II — REACH-AND-HOLD UNDER HUMAN PUSH

Scenario. The robot navigates a triangle of three waypoints (A, B, C) in one lap. At each waypoint, 0.8 s after arrival, a directionally varied 15 N push fires for 2 s. The robot must recover and dwell within 35 mm of the target for 1 s before advancing (3 push events, one per waypoint).

TABLE III
BENCHMARK II: WAYPOINT-HOLD UNDER DIRECTIONALLY VARIED
PUSH

Controller	Waypts	RMS free	RMS cont.	Peak
G1 – Stiff Impedance	3/3	63.6	41.4	47.1
G2 – Pure Admittance	3/3	72.8	190.2	226.6
G3 – Variable Compl.	3/3	69.3	133.5	170.1
MPVIC – Var.-Imp. MPC	3/3	51.2	5.0	6.0
G4 – MPC 100 Hz	3/3	47.9	2.2	2.6
G5 – MPC+K 100 Hz	3/3	47.9	0.6	2.4
G6 – MPC 500 Hz	3/3	51.9	0.8	1.0
G7 – MPC+K 500 Hz	3/3	51.4	0.2	0.8

Analysis. The static-waypoint hold confirms the same separation seen in Benchmark I, and is included here for completeness rather than as an independent finding. All four MPC variants (G4–G7) reach every waypoint with order-of-magnitude lower contact-window deflection than the reactive baselines: against the stiff-impedance baseline (G1), the MPC cuts contact-window RMS from 41.4 mm to 2.2 mm (G4) and peak deflection from 47.1 mm to 2.6 mm. Adding the Kalman augmentation improves the contact and free-motion metrics — G5 lowers contact-window RMS from 2.2 mm to 0.6 mm and slightly reduces peak (2.6→2.4 mm) — so unlike a higher impedance gain it carries no peak penalty. Raising the QP rate to 500 Hz then sharpens the first-contact transient further: G7 attains 0.2 mm contact-window RMS and a 0.8 mm peak. The pure-admittance and variable-compliance baselines (G2, G3) yield by design, producing the large 190–134 mm contact-window deflections expected of intentional compliance. The predictive variable-impedance baseline (MPVIC) behaves oppositely to the reactive variable-compliance G3: instead of softening, it stiffens predictively to reject the push, cutting contact-window RMS to 5.0 mm, yet it stays a further order of magnitude above the offset-free G5 (0.6 mm) — the same non-offset-free residual seen in Benchmark I. As in Benchmark I, MPVIC here is our own discrete-stiffness scheduler, not a reproduced published algorithm; see the main paper’s Benchmark I discussion for the corresponding caveat.

VII. TIME-VARYING INTERACTION AND HORIZON-PREDICTION VALIDITY

The benchmarks in the main paper apply constant or step forces. Because the framework targets *interaction* dynamics broadly, we additionally exercise a *time-varying* human force and measure a proxy for the N -step disturbance-prediction RMS ε_N of Section III-D of the main paper — the quantity that bounds how well the flat random-walk prediction holds over the horizon. To isolate the effect of the force alone from configuration-driven terms, the robot holds a *static* target while a sinusoidal push $F_z = -A \sin(2\pi ft)$ of fixed amplitude $A = 12$ N and increasing frequency f is applied, sweeping the disturbance rate $L_d = A 2\pi f / \sqrt{2}$. The controller is DI-MPC + Kalman (C5, 100 Hz QP).

What ε_N actually measures here. Because the true disturbance d_k is not directly logged in this experiment, we use the filtered estimate $\hat{d}_{k|k}$ as its proxy and the flat prediction $\hat{d}_{k|k-N} = \hat{d}_{k-N|k-N}$, so $\varepsilon_N = \text{RMS}_k \|\hat{d}_{k|k} - \hat{d}_{k-N|k-N}\|$ measures the N -step *self-consistency of the estimate*, not the

TABLE IV
TIME-VARYING FORCE: HORIZON SELF-CONSISTENCY ERROR
(ESTIMATOR PROXY) AND TRACKING

L_d [N/s]	ε_1	ε_N	$\varepsilon_N - \varepsilon_1$	Bound	RMS [mm]
0.0	0.04	0.38	0.34	0.00	0.08
5.3	0.05	0.52	0.46	0.53	0.12
10.7	0.12	1.20	1.08	1.07	0.27
21.3	0.25	2.47	2.22	2.13	0.54
42.7	0.49	4.87	4.38	4.27	1.03

main paper’s eq. (13) prediction error against the true d_k directly — the two agree only to the extent $\hat{d}$ has converged to d . This is visible in the $L_d = 0$ (constant-force) row: the theoretical extrapolation term $L_d N \Delta t$ is exactly zero there, yet the measured $\varepsilon_N - \varepsilon_1 = 0.34$ N is not — that residual is the estimator’s own process-noise jitter accumulated over N steps, a real but different quantity from the extrapolation term. Table IV should therefore be read as evidence *consistent with* the linear-in-rate scaling eq. (13) predicts, not a direct validation against ground truth; a true ground-truth check — computing $d_{a,k}$ from the logged simulation dynamics ($\ddot{e}_k + \Lambda^{-1}(q)F_{\text{mpc},k}$, both already available since the injected force is known) rather than the filtered estimate — is a well-defined follow-up we have not run.

Analysis. The measured horizon-extrapolation gap $\varepsilon_N - \varepsilon_1$ (self-consistency proxy) tracks the bound term $L_d N \Delta t$ to within $\approx 10\%$ across a decade of disturbance rate (0.46 vs. 0.53; 1.08 vs. 1.07; 2.22 vs. 2.13; 4.38 vs. 4.27 N), consistent with the flat-prediction error being *linear in the force rate* as eq. (13) predicts, with a constant-force floor ≈ 0.38 N (the $f = 0$ row) set by the estimate’s process-noise jitter accumulated over the N steps — not itself a prediction-error measurement (see above). Tracking degrades gracefully: the controller holds sub-millimeter error up to $L_d \approx 21$ N/s and ≈ 1 mm at 43 N/s, recovering the offset-free property (Theorem 2 of the main paper) as $f \rightarrow 0$. This is consistent with the disturbance-prediction analysis of the main paper’s Section III-D and the use of the flat random-walk model inside the receding-horizon loop, though a ground-truth (not self-consistency) measurement would be needed to validate it directly; for a *structured* high-rate force (e.g. physiological tremor) the harmonic-internal-model extension of Section III-D would predict that component forward exactly rather than extrapolate it flat. The experiment is reproduced by `time_varying_experiment.py`.

VIII. HUMAN-FORCE MAGNITUDE AND SHAPE SWEEP

Benchmark I and §VII fix the force magnitude at 12–15 N. Because the offset-free property (Theorem 2 of the main paper) is independent of the force amplitude, we sweep a sustained (step) push $F_z \in \{5, 10, 15, 20, 25\}$ N on the circular tracking task and report the steady-state and peak tip deflection for classical impedance (D1) and the proposed offset-free controller (D7, DI-MPC + Kalman, 500 Hz); a shape sweep at 15 N (step / linear ramp / 1 Hz sinusoid) complements the time-varying study of §VII.

Analysis. Classical impedance deflects in proportion to the force — the $e_\infty = K_d^{-1}F_h$ bias combined with the dynamic

TABLE V
HUMAN-FORCE MAGNITUDE SWEEP (SS / PEAK DEFLECTION, MM)

F_z [N]	5	10	15	20	25
D1 Imp. – SS	26.9	33.7	45.0	58.5	73.1
D1 Imp. – peak	28.4	37.0	51.2	70.1	88.9
D7 – SS	0.021	0.021	0.021	0.021	0.021
D7 – peak	0.29	0.50	0.76	1.02	1.27

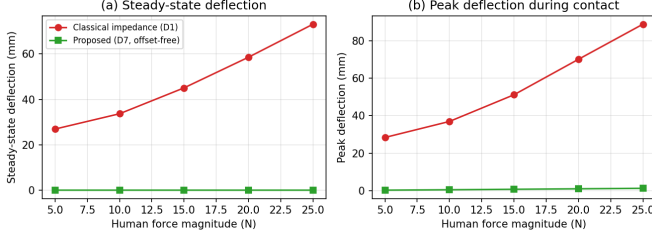


Fig. 2. Human-force magnitude sweep: steady-state (a) and peak (b) tip deflection versus a sustained push, for classical impedance (D1, red) and the proposed offset-free controller (D7, green). The proposed steady-state deflection is invariant to force magnitude (0.021 mm), while classical impedance grows linearly.

tracking error grows from 27 mm at 5 N to 73 mm at 25 N — whereas the proposed controller holds a **0.021 mm steady-state deflection independent of magnitude**: the integrating disturbance state cancels the force whatever its size, so accuracy no longer trades against the human’s effort. The first-contact peak grows only mildly (0.29 → 1.27 mm across 5–25 N), scaling with the force step before $\hat{d}$ converges. Under the three 15 N shapes the proposed controller keeps contact-window RMS at 0.15 mm (step), 0.10 mm (ramp), and 0.40 mm (1 Hz sinusoid) versus 40.9 / 26.0 / 33.0 mm for classical impedance; the sinusoid is the worst case, consistent with §VII — the flat $\hat{d} = 0$ model lags a fast-varying force, which the harmonic internal model of Section III-D of the main paper would recover. Reproduced by `force_sweep.py`.

IX. CORRECTION-AUTHORITY ROBUSTNESS (IMPEDANCE-BACKBONE ABLATION)

Every controller in the main paper places the entire task-space correction inside one box-constrained decision variable, F_{mpc} : if it is driven toward zero — a tight F_{max} bound, or a horizon step whose predicted torque is unrealizable — the commanded torque degrades to the feedforward term τ_{ff} alone, i.e. zero corrective stiffness. We evaluate an architectural ablation, **C8**, that decouples baseline corrective stiffness from the optimizer: a fixed, positively damped impedance law

$$F_{\text{bb}} = K_{\text{bb}}e + D_{\text{bb}}\dot{e}, \quad K_{\text{bb}} = 300 \text{ N/m},$$

is commanded on every MPC update independent of the QP output ($D_{\text{bb}} = 2\zeta_{\text{bb}}\sqrt{K_{\text{bb}}}$, a nominal unit-effective-mass tuning — $\Lambda^{-1}(q)$ is generally anisotropic, so this is not exact modal-critical damping), and the QP shapes only a bounded additional correction F_{mpc} ($\|F_{\text{mpc}}\|_{\infty} \leq F_{\text{max}}$) predicted through the backbone dynamics linearized at the current configuration, $A_{\text{cl}} = A_d + B_d(\rho_k)G_{\text{bb}}$. If the QP’s output is driven to exactly zero for any reason, the commanded controller retains this non-zero corrective stiffness instead of reverting to bare feedforward. This is QP-independence, not

TABLE VI
CORRECTION-AUTHORITY ABLATION: F_{max} SWEEP, RMS / PEAK (MM)

F_{max} [N]	150	20	5	1	0
C7 – RMS cont.	0.15	0.15	317.6	414.0	424.4
C7 – peak	0.77	0.76	412.3	552.5	560.8
C8 – RMS cont.	0.15	0.15	22.5	37.7	41.3
C8 – peak	0.76	0.76	29.8	47.9	51.6

actuator-limit independence: the **total commanded torque** is $\tau = \tau_{\text{base}} + J_v^{\top}(F_{\text{bb}} + F_{\text{mpc}})$ — F_{bb} is not optional and must be included in any torque-feasibility check — and C8 additionally applies the main paper’s eq. (9b) row at *every* horizon step rather than only the first, frozen at the current configuration:

$$\begin{aligned} -\tau_{\text{max}} &\leq \tau_{\text{base}}(0) + J_v^{\top}(q_0)(F_{\text{bb}} + F_{\text{mpc},i}) \\ &\leq \tau_{\text{max}}, \quad i = 0, \dots, N-1, \end{aligned}$$

the frozen-Jacobian horizon-wide extension of (9b) — not implied by (9b)/(9c) alone, and specific to C8, not part of the default (C1–C7) formulation. Freezing $J_v(q_0)$, $\tau_{\text{base}}(0)$ across the horizon is a local approximation, not an exact prediction of future torque feasibility. With this in place, the evidence below supports robustness to loss of **additive QP correction authority** specifically, not a blanket guarantee under arbitrary actuator saturation or solver failure.

Scenario and protocol. Identical to Benchmark I: 12 cm circular reference, 15 N step push, 3 cycles / 24 s, contact-window metrics averaged over all three push events. We sweep the corrective-force bound $F_{\text{max}} \in \{150, 20, 5, 1, 0\}$ N, holding every other parameter fixed, emulating progressively severe loss of additive correction authority; $F_{\text{max}} = 0$ N is the limiting case in which the QP contributes nothing.

Results. Under the normal protocol ($F_{\text{max}} = 150$ N), C8 matches C7 to measurement precision — RMS/contact/peak/SS of 12.66/0.15/0.76/0.022 mm vs. C7’s 12.61/0.15/0.77/0.022 mm (both reproduced under the present codebase for a self-consistent comparison; both agree with the main paper’s Table I C7 row to within a small residual difference from an exact zero-order-hold correction applied after that table was generated). The stress sweep is the key comparison:

Analysis. At $F_{\text{max}} \geq 20$ N there is enough headroom that both controllers are unaffected and C8 costs nothing relative to C7 — the backbone’s restoring term is exactly what the unconstrained QP would already have produced. Below that, C7’s contact-window RMS jumps by roughly three orders of magnitude (0.15 → 424 mm) the moment the corrective force can no longer supply the needed authority: with F_{mpc} forced toward zero, the commanded torque approaches bare feedforward against the sustained push. **C8 degrades gracefully instead**, settling at 22–41 mm even in the $F_{\text{max}} = 0$ limit — a 10–14× smaller error than C7 across the curtailed range, and bounded rather than diverging. The impedance-equivalence and offset-free statements of Theorems 1–2 of the main paper are proved for the standard (non-backbone) realization; C8’s additive term retains the same offset-free mechanism (the $-\hat{d}$ centering trick is applied to F_{mpc} , not the backbone), but a formal re-derivation of the theorems for the backbone-augmented closed loop is left to future

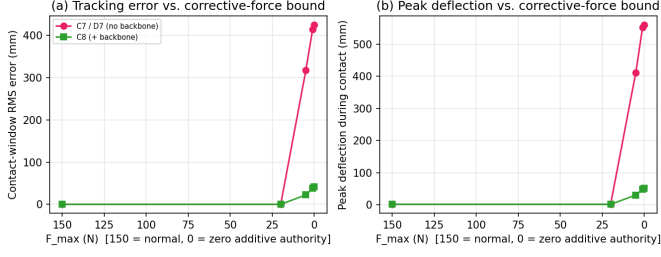


Fig. 3. Correction-authority robustness ablation: contact-window RMS (a) and peak deflection (b) versus the QP’s corrective-force bound $F_{\max}$, for the proposed controller with (C8, green) and without (C7, red) the impedance backbone. C8 degrades gracefully as $F_{\max} \rightarrow 0$ while C7 collapses toward bare feedforward.

work. This is an architectural finding about how to *deploy* the predictive layer safely, complementary to and compatible with the energy-tank layer of the main paper’s Section IV-C (which governs coupled-system stability rather than QP-authority loss); it is reported here as a self-contained ablation rather than folded into the main paper’s central narrative. Reproduced by `stable_backbone_comparison.py --n-cycles 3`.