

Compact Offset-Free Interaction-Error MPC with Applied-Torque Constraints for Physical Human–Robot Interaction

Yongyan Cao¹ and Jinshan Tang²

Abstract—Many physical human–robot interaction tasks require a robot to yield transiently to contact yet recover a commanded reference under a sustained load. Finite-stiffness impedance control retains a static deflection in this setting, whereas existing predictive interaction controllers often optimize a nonlinear robot or impedance model online. Operational-space cancellation exposes a translational error double integrator with a fixed transition matrix and a configuration-scheduled input map, turning physical interaction into a predictive quantity on that representation rather than a property re-derived per contact or configuration. Built on that representation, we present a compact offset-free interaction-error MPC realization for torque-controlled manipulators. A force-domain random-walk state estimates persistent interaction and model error, and a 30-variable convex QP maps the resulting correction through the current task inertia while constraining the complete applied joint torque. Conditional results establish impedance equivalence of the unconstrained passive feedback component, offset-free regulation at feasible frozen configurations, and quadratic stabilizability of the scheduled backbone. In a 1 kHz MuJoCo simulation of a 7-DOF Franka FR3, the estimator reduces steady-state error under a repeated 15 N step from 2.77 mm to 0.042 mm when added to the otherwise identical 100 Hz MPC. A newly stiffness-and-damping-calibrated impedance baseline attains 2.59 mm but briefly saturates and requires 3.3 times the peak positive joint power of the proposed controller. Adding ideal measured-force cancellation to that matched baseline reduces the error to 1.39 mm, confirming that constant-load rejection is not unique to MPC; the sensorless augmented controller reaches 0.042 mm in the moving task, a $65\times$ reduction achieved without direct force sensing and without the matched baseline’s saturation or power cost. Established in a 7-DOF torque-controlled simulation under a shared actuator budget, these results demonstrate an efficient operational-space realization for offset-free predictive interaction control that complements, rather than replaces, broader safety and interaction-control architectures.

Index Terms—Physical human–robot interaction, offset-free model predictive control, operational-space control, disturbance estimation, torque constraints.

I. INTRODUCTION

Impedance and admittance control provide transparent contact behavior for physical human–robot interaction (pHRI) [1], [2]. Their intended objectives differ across applications. In hand guiding, a force-induced displacement may be the command itself; zero tracking error is then undesirable. This work instead addresses *reference-holding and recovery* tasks

in which transient deflection is permitted but a robot should return to a commanded motion under a persistent load. With finite stiffness, classical impedance retains the equilibrium bias $p - p_d = K_d^{-1} F_h$. Integral action can remove it but must be coordinated with actuator saturation [3], [4].

Predictive interaction control already has a substantial literature. Gold *et al.* formulate model-predictive interaction control for manipulation tasks [5]; Chen *et al.* integrate impedance matching and constraint optimization [6]; Haninger *et al.* learn interaction models with Gaussian processes [7]; and Cao *et al.* impose passivity in predictive impedance control [8]. Online force estimation has also been combined with MPC [9], while nonlinear manipulator MPC can run at high rate with tailored computation [10]. Safe learning-supported predictive force/motion control [11], predictive variable impedance [12], and MPC–ADRC combinations [13] address adjacent robustness and constraint questions. These works preclude a claim that MPC, disturbance estimation, or interaction-error prediction is new in isolation.

Two of these differ from the present formulation in model scope and sensing. Jordana *et al.* [9] embed direct force-sensor feedback in a full nonlinear whole-body MPC, estimating the discrepancy between predicted and measured contact force within that model; the present controller instead uses no force/torque sensor and estimates an unmodelled aggregate disturbance as a random walk in a reduced, configuration-independent three-dimensional force channel. Gold *et al.*’s MPIC [5] predicts contact force explicitly through an interaction model, weighting the prediction independently in the cost alongside position, velocity, and control-effort terms; for a reference-holding task, that weight must be zero to avoid trading position accuracy for compliance, at which point the force prediction stops contributing to disturbance rejection at all. The present controller instead treats the disturbance as unknown, and its centered input cost achieves offset rejection with no such trade-off: $F_{\text{mpc}} = -\dot{d}$ is exactly cost-free at any position weight, regardless of whether the task is framed as motion, compliance, or force control.

The opportunity addressed here is therefore not a new predictive-control or estimation primitive in isolation, but their specific combination into an economical interface. Rather than optimize full joint dynamics or impedance parameters, operational-space cancellation leaves a normalized translational error model. The optimization variable is a corrective task force, the persistent disturbance is augmented in the same force domain with a centered cost that makes offset rejection

¹Y. Cao is with Voryx Robotics LLC, San Jose, CA 95136, USA (e-mail: yongyancao@gmail.com).

²J. Tang is with the Department of Health Administration and Policy, George Mason University, Fairfax, VA, USA (e-mail: jtang25@gmu.edu).

unconditional on task weighting, and the robot-specific realization enters the complete applied-torque constraint rather than bounding the correction alone. The result is a small convex QP whose state-transition block can be precomputed.

Two controlled comparisons in §VI and §S10 deliberately separate what each mechanism is credited for, rather than crediting the receding-horizon MPC architecture as a whole: the disturbance estimate, not receding-horizon prediction, drives the reported offset-rejection improvement, established against a non-predictive fixed-gain observer-impedance baseline using the identical estimator; and this paper’s slack-relaxed constraint embedding, not deeper prediction, drives torque-feasibility robustness once the actuation budget is tightened enough to bind, established by relaxing the same optimized policy’s hard torque row rather than by extending the horizon. Receding-horizon MPC is the vehicle in which both mechanisms are realized and evaluated together; neither mechanism’s own credit depends on the horizon being predictive as opposed to single-step, and the experiments below test that directly rather than assuming it.

The contributions are therefore threefold:

- 1) a **double-integrator interaction-error representation**: a task-error-centered operational-space predictor with a constant transition matrix and configuration-scheduled input effectiveness, making physical interaction a predictive quantity on a shared model rather than a property re-derived per contact or configuration;
- 2) force-domain offset-free augmentation on that representation, aligning the disturbance estimate, horizon prediction, and corrective task-force variable; and
- 3) an applied-torque realization, on the same representation, that constrains the sum of feedforward, translation, orientation, and null-space torques, accompanied by conditional analytical statements and reproducible simulation audits.

The novelty is thus architectural and implementational: an explicit reusable boundary between a behavior-coordinate request and robot-specific torque realization. It is not a new interaction-control paradigm. The evaluation focuses on the causal C4–C5 estimator ablation and adds a stiffness-and-damping-calibrated impedance, tuned anti-windup PI, and filtered force-cancellation comparison under common joint-torque limits. Boundary and passivity results are reported only at the level actually exercised by the simulation.

II. SYSTEM DYNAMICS AND PROBLEM FORMULATION

Consider an n -DOF torque-controlled serial manipulator; experiments use the Franka FR3 ($n = 7$) [14]. The rigid-body equations of motion are:

$$M(q)\ddot{q} + C(q, \dot{q})\dot{q} + G(q) = \tau + J^\top(q)\mathcal{F}_h \quad (1)$$

where $M(q)$ is the positive-definite inertia matrix; $C(q, \dot{q})\dot{q} + G(q)$ is the Coriolis-plus-gravity vector (available as `qfric_bias` in MuJoCo or via the robot model API); τ is the commanded joint torque; and $\mathcal{F}_h \in \mathbb{R}^6$ is the human-applied wrench. $J(q) = [J_v^\top(q); J_\omega^\top(q)]^\top \in \mathbb{R}^{6 \times n}$ is the full geometric Jacobian, with $J_v \in \mathbb{R}^{3 \times n}$ the translational and $J_\omega \in \mathbb{R}^{3 \times n}$ the rotational sub-Jacobian [15]. $\mathcal{F}_h$ is defined

as positive when the human pushes *onto* the robot, so it enters (1) with a positive sign, adding to the generalized force that accelerates the joints.

The translational Jacobian satisfies $\dot{p} = J_v(q)\dot{q}$ [15]. The operational-space inertia [16] is:

$$\Lambda(q) = (J_v M^{-1} J_v^\top)^{-1} \in \mathbb{R}^{3 \times 3} \quad (2)$$

$\Lambda(q)$ is symmetric positive-definite. The dynamically-consistent pseudoinverse [16], [17] is $\bar{J}_v = M^{-1} J_v^\top \Lambda$, ensuring forces applied through $J_v^\top$ produce no null-space acceleration.

After feedforward cancellation (Section III-A), the human force and joint friction appear as an aggregated Cartesian *acceleration* disturbance $d_{\text{acc}}(t)$ (units m/s^2 — kept notationally distinct throughout from its *force*-equivalent d , units N, introduced in Section III-C and used from Layer 2 onward), modelled as a random walk:

$$\dot{d}_{\text{acc}} = w(t), \quad w \sim \mathcal{N}(0, Q_d) \quad (3)$$

capturing constant forces (sustained pushes, physiological tremor) and slow-varying loads (unmodelled payloads, tool changes). This decomposition is written in acceleration units; the estimator and QP of Section III-B operate on the equivalent *force-form* disturbance $d = -\Lambda(q)d_{\text{acc}}$ (the quantity entering through $B_d(\rho_k)$ in (12)), the form realized in code. Only the interaction-wrench contribution to d is constant under a constant human force; the remaining terms of d_{acc} in (7) — orientation coupling, the Jacobian-derivative term, model error — stay configuration- and motion-dependent regardless, which is why d is modelled as a random walk rather than a known constant.

For the reference-holding task considered here, design a torque law τ such that for any constant bounded disturbance d compatible with the actuator constraints:

- 1) $\|e(\infty)\| = 0$, where $e = p_d - p$ (zero steady-state error);
- 2) $\|e(t)\|$ is minimized over a finite prediction horizon;
- 3) $q_i \in [q_{\min,i} + \epsilon, q_{\max,i} - \epsilon]$ for all i when the one-step safety filter is enforced.

The optimization uses the following reduced representation.

Definition 1 (Interaction-error predictor). *The interaction-error predictor is the augmented task-coordinate model*

$$x_{k+1} = A x_k + B u_k + E d_k$$

with x_k the task error and error rate, u_k the corrective task force, and d_k a force-equivalent persistent disturbance. It is a control-oriented reduction of (1), not an alternative physical dynamics.

Section III-B constructs the predictor with constant $A = A_d$, scheduled $B = B_d(\rho_k)$, and an augmented estimate of d . This constant- A property applies to the residual translational predictor only. The complete torque realization remains robot dependent through M , $C\dot{q} + G$, J , the full-pose null-space projector, joint limits, and actuator constraints.

III. LINEAR INTERACTION-ERROR PREDICTOR AND FINITE-HORIZON REALIZATION

A. Layer 1 — Feedforward Nonlinear Inversion

Classical Cartesian impedance control [1] commands:

$$\tau = C\dot{q} + G + J_v^\top (\Lambda \ddot{p}_d + \mu + K_d \dot{e} + D_d \dot{e})$$

where $\mu = \Lambda J_v M^{-1} C \dot{q} - \Lambda \dot{J}_v \dot{q}$ collects task-space Coriolis and centripetal terms [16], embedding the full impedance law inside a single static feedback. This treats F_h as a disturbance to be passively rejected with no predictive look-ahead and no mechanism to drive steady-state error to zero.

The proposed Layer 1 explicitly separates these concerns. Following the operational-space decomposition of [16], the full torque command is partitioned into four channels via the null-space projector $\bar{N} = I - \bar{J}J$ [17], where $\bar{J} = M^{-1}J^\top \Lambda_6$ is the dynamically-consistent pseudoinverse of the full 6-DOF pose Jacobian J and $\Lambda_6 = (JM^{-1}J^\top)^{-1} \in \mathbb{R}^{6 \times 6}$ is the full-pose operational-space inertia (both the translational MPC task and the orientation channel are actively controlled, so the projector annihilates the full pose task, not only its translational part):

$$\tau = \tau_{\text{ff}} + J_v^\top F_{\text{mpc}} + J_\omega^\top F_{\text{orient}} + \bar{N}^\top \tau_{\text{null}} \quad (4)$$

The feedforward term cancels all known nonlinearities using the computed-torque method [15]:

$$\tau_{\text{ff}} = \underbrace{C(q, \dot{q})\dot{q} + G(q)}_{\text{qfrc_bias}} + J_v^\top \Lambda(q) \ddot{p}_d \quad (5)$$

Writing the Layer-2 task channel as $\tau_{\text{mpc}} \equiv J_v^\top F_{\text{mpc}}$, define the known non-MPC torque offset

$$\tau_{\text{base}} = \tau_{\text{ff}} + J_\omega^\top F_{\text{orient}} + \bar{N}^\top \tau_{\text{null}}.$$

The final applied command is the joint torque $\tau = \tau_{\text{base}} + \tau_{\text{mpc}}$, which the hardware saturates at the per-joint actuator limit $|\tau_i| \leq \tau_{\text{max},i}$; Layer 2 constrains this applied receding-horizon torque, while the hardware interface keeps clipping and rate limiting as final runtime guards.

Proposition 1. *After applying (5), the residual error dynamics are represented by the linear double integrator*

$$\ddot{e} = -\Lambda^{-1}(q) F_{\text{mpc}} + d_{\text{acc}}(t) \quad (6)$$

with $e = p_d - p$; every term left over from the feedforward cancellation — not just the human force — is collected into the acceleration-form disturbance $d_{\text{acc}}(t)$, defined below (not to be confused with its force-equivalent $d = -\Lambda(q)d_{\text{acc}}$, Section III-C, which is the quantity actually estimated and cancelled from Layer 2 onward):

$$d_{\text{acc}}(t) = \underbrace{-\Lambda^{-1}(q) \bar{J}_v^\top J^\top \mathcal{F}_h}_{\text{projected pHRI force}} - \underbrace{J_v M^{-1} J_\omega^\top F_{\text{orient}}}_{\text{orientation coupling}} - \underbrace{\bar{J}_v(q, \dot{q})\dot{q}}_{\text{Jacobian derivative}} + \underbrace{\epsilon_m(t)}_{\text{model error}} \quad (7)$$

where $\bar{J}_v^\top = \Lambda J_v M^{-1} \in \mathbb{R}^{3 \times n}$ and $J^\top \in \mathbb{R}^{n \times 6}$ is the full geometric Jacobian transpose, so $\bar{J}_v^\top J^\top \in \mathbb{R}^{3 \times 6}$ acts on the 6-D wrench $\mathcal{F}_h$ (equivalently the term is $-J_v M^{-1} J^\top \mathcal{F}_h$).

The four terms: (i) the *projected pHRI force* — for a purely translational $\mathcal{F}_h = [F_h^\top, 0]^\top$ this reduces to $-\Lambda^{-1}F_h$ in acceleration form (because $e = p_d - p$, any positive acceleration

of p induced by the human force appears with a negative sign in $\ddot{e}$); (ii) the *orientation coupling* — residual translational acceleration from the simple additive orientation PD. This mobility cross-term is generally structural, not a numerical artifact, and is, in its force-equivalent form, absorbed by $\hat{d}$; (iii) the *Jacobian derivative* $-\bar{J}_v \dot{q}$, small at typical speeds; (iv) the *model error* $\epsilon_m(t)$ from imperfect gravity/Coriolis cancellation.

Remark 1 (Exactness of the reduction). *Under ideal cancellation the residual plant is exactly the double integrator (6); in practice the terms (ii)–(iv) are not identically zero. Rather than being neglected they are modelled as the acceleration disturbance $d_{\text{acc}}(t)$, whose force-equivalent $d = -\Lambda(q)d_{\text{acc}}$ the augmented Kalman state $\hat{d}$ estimates and the MPC rejects (Theorem 2). The reduction is thus a cancellation-plus-disturbance model, not an assumption of perfect inversion. Only the residual translational predictor has constant A_d and scheduled $B_d(\rho_k)$; the applied-torque realization retains the full robot-model dependence listed after Definition 1.*

B. Layer 2 — Discrete LPV Model and QP

With error state $x_e = [e^\top, \dot{e}^\top]^\top \in \mathbb{R}^6$ and scheduling variable $\rho_k = q_k$, exact zero-order-hold (ZOH) discretization gives:

$$x_{e,k+1} = \underbrace{\begin{bmatrix} I_3 & \Delta t I_3 \\ 0 & I_3 \end{bmatrix}}_{A_d(\text{constant})} x_{e,k} + \underbrace{\begin{bmatrix} -\frac{\Delta t^2}{2} \Lambda^{-1}(q) \\ -\Lambda^{-1}(q) \Delta t \end{bmatrix}}_{B_d(\rho_k)} F_{\text{mpc},k} \quad (8)$$

Equation (8), together with the disturbance augmentation (12) below, instantiates Definition 1: the state x_e is the task error, the input F_{mpc} is the corrective task force, and $\hat{d}$ is the estimated force-equivalent disturbance. Identifying $A = A_d$ and $B = B_d(\rho_k)$ gives the model used by the QP; constraints are imposed through a separate robot-specific torque map rather than being intrinsic properties of the reduced dynamics.

Structural result. The continuous-time matrix $A_c = \begin{bmatrix} 0 & I_3 \\ 0 & 0 \end{bmatrix}$ is nilpotent ($A_c^2 = 0$), so the matrix exponential terminates exactly at first order and $A_d = e^{A_c \Delta t} = I + A_c \Delta t$ is configuration-independent and exact, with no discretization approximation; the exact ZOH input integral $B_d(\rho_k)$ is likewise closed-form. Each frozen pair $(A_d, B_d(\rho))$ is pointwise controllable, and the disturbance state augmented in Sec. III-C is detectable, at every configuration away from kinematic singularities (proof: supplementary material, Sec. S1, Remark S1).

Implementation note (regularization). In code $\Lambda^{-1}(q) = J_v M^{-1} J_v^\top + \sigma I$ with $\sigma = 10^{-6}$; this Tikhonov term is negligible in the workspace interior and only mildly damps the estimate near singularities, outside the operating region.

The receding-horizon QP with $N = 10$ steps, $3N = 30$ decision variables $U = [F_{\text{mpc},0}; \dots; F_{\text{mpc},N-1}]$, is:

$$\min_U \frac{1}{2} U^\top H U + h^\top U \quad (9a)$$

$$\text{s.t. } -\tau_{\text{max}} \leq \tau_{\text{base}}(i) + J_v^\top(q_i) F_{\text{mpc},i} \leq \tau_{\text{max}}, \quad i = 0, \dots, N-1, \quad (9b)$$

$$-F_{\text{max}} \leq F_{\text{mpc},k} \leq F_{\text{max}}, \quad k = 0, \dots, N-1. \quad (9c)$$

where $F_{\max}$ is the task-space (Cartesian) corrective-force bound on the QP's decision variable (distinct from the joint-torque limit $\tau_{\max}$), and $\tau_{\text{base}}(i) = \tau_{\text{ff}}(i) + J_{\omega}^{\top} F_{\text{orient}} + \bar{N}^{\top} \tau_{\text{null}}$ is the known non-MPC torque offset (Sec. III-A). Step 0 uses the exact current-configuration values $\tau_{\text{ff}}(0), J_v(q_0)$; for $i \geq 1$, $\tau_{\text{ff}}(i)$ and $J_v(q_i)$ are evaluated at the reference-scheduled configuration $q_i = q_d(t + i\Delta t)$ — the best available prediction of the future state, since the realized trajectory is not yet known — while orientation and null-space terms stay frozen at their step-0 value. $N_c \in \{1, \dots, N\}$ sets how many leading rows are enforced; the reported experiments use $N_c = 1$ (first-move only), with the reference-scheduled extension to $N_c = N$ implemented but not separately benchmarked here. $H = \Gamma^{\top} \bar{Q} \Gamma + \bar{R}$, stage cost $Q = \text{blkdiag}(K_d, D_d)$, terminal cost $Q_f = \gamma Q$ ($\gamma = 5$), $\bar{Q} = \text{blkdiag}(Q, \dots, Q, Q_f)$, $\bar{R} = \text{blkdiag}(R, \dots, R)$. Let $d_N = \mathbf{1}_N \otimes \hat{d}$; the linear term is $h = \Gamma^{\top} \bar{Q} x_{\text{free}} + \bar{R} d_N$, corresponding to the offset-free input-centered incremental effort penalty $\|U + d_N\|_{\bar{R}}^2$ rather than absolute physical effort. Equivalently, before eliminating the predicted state, the objective is

$$J(U) = \frac{1}{2} X^{\top} \bar{Q} X + \frac{1}{2} (U + d_N)^{\top} \bar{R} (U + d_N), \quad (10)$$

whereas the physical force and torque constraints remain imposed on U . The free response $x_{\text{free}} = \Phi x_e + D_{\text{bar}} \hat{d}$, where $D_{\text{bar}} \in \mathbb{R}^{6N \times 3}$ has j -th block $\sum_{l=0}^{j-1} A_d^l B_d(\rho_k)$; equivalently, $D_{\text{bar}} = \Gamma(\mathbf{1}_N \otimes I_3)$. Only $F_{\text{mpc},0}$ is applied (receding-horizon principle). *Constraint interpretation (feasible final control)*. The final applied command is the joint torque $\tau = \tau_{\text{base}} + J_v^{\top} F_{\text{mpc},0}$, where τ_{base} contains feedforward, orientation, and null-space terms, which the hardware saturates at the per-joint actuator limit $\tau_{\max}$ (on the FR3, $\tau_{\max} = [87, 87, 87, 87, 12, 12, 12]$ Nm). Constraining only the correction, $\|F_{\text{mpc}}\|_{\infty} \leq F_{\max}$, would *not* keep τ within $\tau_{\max}$: it ignores the feedforward offset τ_{ff} (both $C\dot{q} + G$ and the inertial term $J_v^{\top} \Lambda \ddot{p}_d$, which on the FR3 dominate the budget), and it bounds a Cartesian force whereas the map $J_v^{\top}(q)$ to joint torque is configuration-dependent; any deficit would be absorbed by a downstream torque clip, i.e. *saturation*, discarding the optimized command. We therefore constrain the first applied receding-horizon torque directly, as in (9b). Since $\tau_{\text{base}}(0)$ and $J_v(q_0)$ are known at solve time, the constraint is affine in $F_{\text{mpc},0}$ — a convex per-joint polytope solved by OSQP at the same cost class as a box. As only the first move is applied, the nominal applied torque satisfies $|\tau_i| \leq \tau_{\max,i}$ whenever the QP is feasible. Runtime clipping and rate limiting remain as final safety guards; horizon-wide torque rows can be added but are not required for feasibility of the applied receding-horizon action. If an over-aggressive reference makes $\tau_{\text{base}}(0)$ alone exceed $\tau_{\max}$, the released implementation returns a zero correction on infeasibility (correction- authority ablation, supplementary material Sec. S9), which is simple but not minimum-violation. The $i = 0$ ($N_c = 1$) row can instead be softened with a penalized slack $s \geq 0$ so the QP stays feasible and returns a minimum-violation-like command, analogous to the joint-limit CBF relaxation of Sec. IV-B; §S10 implements and stress-tests exactly this relaxation under a deliberately tightened $\tau_{\max}$: it recovers the hard constraint's lost tracking quality

at a practically relevant tightening while never triggering the plant's physical clip, though it does draw on genuinely nonzero slack relative to the tightened test budget itself, a distinction §S10 makes precise.

The following conditional identification relates the unconstrained feedback component to classical impedance; it is not a claim that predictive control subsumes every impedance implementation.

Theorem 1 (Impedance Equivalence). *Fix a configuration and assume the input constraints are inactive and the disturbance estimate is zero. Then the first MPC move is a linear state feedback $F_{\text{mpc}} = K_e e + K_{\dot{e}} \dot{e}$. If the realized gain blocks are symmetric positive definite, or more generally have symmetric parts that define passive stiffness and damping, set $K_{\text{eff}} = \text{sym}(K_e) \succ 0$ and $D_{\text{eff}} = \text{sym}(K_{\dot{e}}) \succ 0$; the conservative part of the closed loop is the classical task-space impedance:*

$$\Lambda(q) \ddot{e} + D_{\text{eff}} \dot{e} + K_{\text{eff}} e = -F_h, \quad (11)$$

where F_h is the constant force-equivalent disturbance applied to the end effector.

Proof. With inactive constraints and $\hat{d} = 0$, (9) reduces to an unconstrained strictly convex quadratic because $H = \Gamma^{\top} \bar{Q} \Gamma + \bar{R} \succ 0$ when $\bar{R} \succ 0$. Its unique minimizer is

$$U^* = -H^{-1} \Gamma^{\top} \bar{Q} \Phi x_e.$$

Let $S = [I_3 \ 0 \ \dots \ 0]$ select the first force block. The applied force is therefore

$$F_{\text{mpc}} = S U^* = \begin{bmatrix} K_e & K_{\dot{e}} \end{bmatrix} \begin{bmatrix} e \\ \dot{e} \end{bmatrix},$$

for fixed matrices $K_e, K_{\dot{e}}$ determined by $(A_d, B_d, \bar{Q}, \bar{R}, Q_f, N)$. Under the stated symmetry/sign condition, the symmetric parts define K_{eff} and D_{eff} . The exact linear closed loop is obtained with the full gains $K_e, K_{\dot{e}}$; only their symmetric parts admit the conservative spring-damper interpretation. The skew part of $K_{\dot{e}}$ is workless gyroscopic damping coupling, whereas the skew part of K_e is a circulatory position force and is not passive in general. These skew terms vanish in the common isotropic/commuting case and are otherwise treated as part of the stabilizing LQR feedback rather than as classical impedance parameters. The residual plant from Proposition 1 is $\ddot{e} = -\Lambda^{-1} F_{\text{mpc}} + d_{\text{acc}}$. For a translational constant human force represented in force form by $F_h = -\Lambda d_{\text{acc}}$, multiplication by Λ gives $\Lambda \ddot{e} = -F_{\text{mpc}} - F_h$. Substituting the linear feedback yields (11). $\square$

Thus the unconstrained MPC realizes a configuration-dependent linear impedance whenever the gain blocks have the passive stiffness/damping sign structure; constraints and disturbance augmentation are the mechanisms that extend this linear impedance behavior.

Remark 2 (Optimality vs. passivity: motivation for the energy tank). *Because the predictive gain is the LQR/Riccati image of (Q, R) rather than a passive design, the skew part of K_e (Theorem 1) is a non-passive circulatory force. For the robot alone this is benign (the DARE closed loop is asymptotically stable), but coupled to a human—itsself a dynamical*

system—a non-passive controller need not preserve stability of the coupled loop. This motivates the energy-tank layer of §IV-C: rather than restricting (Q, R) to passive gains and sacrificing performance, we keep the optimal law and restore a sampled energy-budget certificate on the scaled translational predictive-force channel at runtime (Proposition 2), bounding the positive work that channel can deliver. This is a channel-level certificate, not a full-port passivity proof (see the scope remark in §IV-C), so it does not by itself guarantee coupled stability against an arbitrary passive environment; it removes one identified non-passive source while leaving feedforward, orientation, and null-space contributions to the port outside its accounting.

Remark 3 (Prescribed vs. realized gains). The cost weights $Q = \text{blkdiag}(K_d, D_d)$, R are design penalties; the realized impedance $(K_{\text{eff}}, D_{\text{eff}})$ is their LQR image — a nonlinear (Riccati) map of (Q, R) — so in general $(K_{\text{eff}}, D_{\text{eff}}) \neq (K_d, D_d)$. The weights shape the realized impedance: the high-bandwidth tracking reported below corresponds to the stiff, well-damped K_{eff} the chosen (Q, R) induce. If a specific (K_d, D_d) must instead be matched exactly, the impedance gain can be prescribed directly ($F_{\text{mpc}} = K_d e + D_d \dot{e}$), rendering the equivalence exact for those gains at the cost of predictive look-ahead. We adopt the LQR form, for which Theorem 1 already establishes the analytical connection between the unconstrained MPC and a realized classical impedance.

Corollary 1 (Existence of a Gain-Scheduled Infinite-Horizon Implementation). The infinite-horizon MPC admits a pure state-feedback realization $F_{\text{mpc},k} = -K_\infty(\rho_k)x_{e,k}$. By the DARE detectability result established in the supplementary material (Sec. S1, Remark S1), the stabilizing DARE solution $P_\infty(\rho)$ exists for each fixed ρ under the stated detectability assumptions, and $K_\infty(\rho_k)$ depends on ρ_k only through $\Lambda^{-1}(q)$ — a symmetric 3×3 SPD matrix, so the scheduling space is the 6-D manifold of its independent entries. Since the stabilizing DARE solution is continuous in its coefficients, $K_\infty(\cdot)$ is continuous over this compact domain.

Remark 4 (Practical 1 kHz implementation). Continuity of K_∞ over a compact 6-D domain makes an offline-precomputed lookup attractive: the gain can be tabulated on a grid of $\Lambda^{-1}(q)$ values and interpolated, reducing the online cost to a single 3×6 matrix–vector product. We present this as a deployment option, not a validated result — grid density, interpolation error, and the resulting closed-loop quality are implementation choices we do not characterize here. The experiments instead run the finite-horizon QP (9) at 100 Hz with a 1 kHz inner loop, which also enforces the first applied torque constraint (9b) and exploits prediction look-ahead; a hardware demonstration of the 1 kHz law is future work.

C. Kalman Disturbance Augmentation for Offset-Free Tracking

For the estimator we represent the disturbance in force form: the augmented state $d \in \mathbb{R}^3$ (units N) is the force-equivalent of the task-acceleration disturbance of the residual dynamics $\ddot{e} = -\Lambda^{-1}(q)F_{\text{mpc}} + d_{\text{acc}}$, related by $d = -\Lambda(q)d_{\text{acc}}$. This

form enters the discrete model through the *same* input matrix $B_d(\rho_k)$ as the control F_{mpc} , and—unlike the acceleration form $d_{\text{acc}} = -\Lambda^{-1}(q)d$, which varies with configuration as $\Lambda(q)$ changes—its dominant, interaction-wrench component is constant for a constant human force, independent of $\Lambda(q)$; the remaining, smaller contributions to d stay configuration- and motion-dependent, and the random-walk model (12) accommodates that residual variation rather than assuming $d(t)$ is exactly constant, consistent with the constant- d_∞ hypothesis Theorem 2 states for the estimator’s converged target. It is the quantity the implementation stores as $\hat{d}$ and cancels via $F_{\text{mpc}} = -\hat{d}$ at steady state. Augment the state with this integrating disturbance, modelled as a random walk $d_{k+1} = d_k + w_k$:

$$\begin{bmatrix} x_{e,k+1} \\ d_{k+1} \end{bmatrix} = \underbrace{\begin{bmatrix} A_d & B_d(\rho_k) \\ 0 & I_3 \end{bmatrix}}_{A_{\text{aug}}} \begin{bmatrix} x_{e,k} \\ d_k \end{bmatrix} + \begin{bmatrix} B_d(\rho_k) \\ 0 \end{bmatrix} F_{\text{mpc},k} + \begin{bmatrix} 0 \\ w_k \end{bmatrix}, \quad (12)$$

with $w \sim \mathcal{N}(0, Q_w)$. The integrating block (eigenvalues at 1) delivers offset-free rejection of constant disturbances by the internal-model principle, while the process noise w lets the filter track slowly-varying disturbances. A steady-state Kalman filter observing $[e; \dot{e}]$ produces the estimate $\hat{d}$ of d via the innovation; it is not frozen but converges to the true disturbance. Both e and $\dot{e}$ are measured directly (position from forward kinematics, velocity from $J_v \dot{q}$), so $C = [I_6 \ 0]$ and the filter is 9-dimensional — the 6 error states and the 3 integrating disturbance states, with no extra velocity-estimation states. The estimate $\hat{d}$ enters the free response, pre-compensating the QP before the disturbance accumulates in the error state.

Implementation note (process-noise scaling). For a disturbance-tracking bandwidth invariant to the QP rate, the random-walk covariance Q_w must scale with the sample time, $Q_w = Q_d \Delta t$ (the exact discretization of the continuous random walk (3)); a single raw discrete constant held fixed across rates implicitly retunes estimator aggressiveness. The implementation scales Q_w by the QP period between the 100 Hz and 500 Hz configurations (Table S1), so the continuous-time-equivalent process-noise density is held constant across the rate comparison; C6/C7 use the correspondingly smaller $Q_w = 2I_3$.

Theorem 2 (Offset-Free Steady-State Tracking). Consider the augmented model (12) at a fixed configuration, with constant disturbance $d_k = d_\infty$. Assume: (i) the augmented estimator is detectable and its estimation error is asymptotically stable, so $\hat{d}_k \rightarrow d_\infty$; (ii) the unconstrained centred-input finite-horizon regulator is asymptotically stable; and (iii) the force and torque constraints are eventually inactive along the considered trajectory. Then the steady-state tracking error is zero: $\lim_{k \rightarrow \infty} e(k) = 0$. If $d_k \rightarrow d_\infty$ asymptotically, the same conclusion holds provided the estimator remains asymptotically tracking.

Proof. Let $\hat{d}_N = \mathbf{1}_N \otimes \hat{d}$ and define the centred input sequence $V = U + \hat{d}_N$. Since $D_{\text{bar}} = \Gamma(\mathbf{1}_N \otimes I_3)$, the identity

$$\Phi x_e + D_{\text{bar}} \hat{d} + \Gamma U = \Phi x_e + \Gamma V$$

holds for any disturbance estimate $\hat{d}$, not only at steady state. Crucially, the original effort term in (10) is $\frac{1}{2}(U + \hat{d}_N)^\top \bar{R}(U + \hat{d}_N)$, not $\frac{1}{2}U^\top \bar{R}U$. Therefore the change of variables gives exactly

$$J(V) = \frac{1}{2}(\Phi x_e + \Gamma V)^\top \bar{Q}(\Phi x_e + \Gamma V) + \frac{1}{2}V^\top \bar{R}V.$$

Thus the nominal controller is exactly the stabilizing linear regulator for the disturbance-free backbone in the variable V : $V^* = -Kx_e$. The applied first input is therefore $F_{\text{mpc}} = v_0 - \hat{d}$, and the plant evolves as

$$x_e^+ = (A_d - B_d K_0)x_e + B_d(d_\infty - \hat{d}),$$

where K_0 is the first block row of K . By assumption (iii), this unconstrained law applies after some finite time. By assumption (ii), its nominal closed loop is asymptotically stable. By assumption (i), the additive input $B_d(d_\infty - \hat{d})$ vanishes, so the stable linear system converges to the same equilibrium. Hence $x_{e,k} \rightarrow 0$ and therefore $e_k \rightarrow 0$.

The theorem does not claim zero error for arbitrary non-convergent time-varying forces or for steady states that require sustained actuator saturation; those cases require a separate invariant-set or anti-windup analysis. $\square$

Remark 5 (Frozen-configuration scope). *Theorem 2 is a frozen-configuration offset-free result: it fixes $\rho_k = q$ so that $B_d(\rho_k)$ and the regulator gain are constant. A supplementary vertex-LMI calculation establishes a common fixed stabilizer for the scheduled backbone over the sampled operating polytope, but that gain is not the deployed finite-horizon MPC policy and therefore does not remove the frozen-configuration caveat for the actual controller. The moving-reference experiments in Section VI are empirical illustrations, not consequences of that certificate; the per-equilibrium property is Theorem 2 applied at each sustained-contact configuration the trajectory visits.*

Scheduled-backbone certificate. Over the benchmark trajectory, 4700 samples of $\Lambda^{-1}(q)$ define a 64-vertex operating polytope. A feasible common-quadratic vertex LMI certifies one fixed stabilizer with contraction factor $\varrho \leq 0.996$ for this sampled scheduled backbone. This does *not* certify the deployed receding-horizon policy. The full statement, matrix conventions, proof, containment audit, and numerical certificate are therefore placed in the supplementary material (Sec. S2, Theorem S1) and reproduced by `lmi_workspace_stability_probe.py`.

D. Disturbance Prediction Validity over the Horizon

A natural question for any offset-free MPC is how good the disturbance prediction is *over the prediction horizon*, not merely at the current step. The QP propagates the augmented model (8), (12) under the random-walk prediction $\hat{d}_{k+i|k} = \hat{d}_{k|k}$ — a flat extrapolation that is exact only for a strictly constant disturbance. For a time-varying aggregate disturbance the prediction degrades with horizon depth i . We address this in three parts.

Bound. Assume the force-equivalent aggregate disturbance $d(t)$ is Lipschitz continuous, $\|\dot{d}(t)\|_2 \leq L_d$, and let $\|d_k - \hat{d}_{k|k}\|_2 \leq e_K$ be the steady-state Kalman estimation error.

Since the random-walk prediction is the identity, the i -step prediction error obeys

$$\|d_{k+i} - \hat{d}_{k+i|k}\|_2 \leq e_K + L_d i \Delta t, \quad i = 0, \dots, N-1, \quad (13)$$

where L_d (units N/s) bounds the aggregate rate, including human force, orientation/ $\hat{J}_v \dot{q}$ coupling, model error, and configuration-dependent force-equivalent terms. In S7's static-target experiment the applied sinusoid is the dominant commanded variation, but L_d is computed directly from the reconstructed aggregate d_k . The quantity e_K is the current Kalman error; the bound follows by the triangle inequality on $d_{k+i} = d_k + \int \dot{d} d\tau$. The first term is the *current* estimation error (to be specified or measured for the operating condition); the second is the *extrapolation* error, linear in horizon depth and unavoidable for any constant-disturbance internal model.

Why it is not load-bearing. Three properties keep (13) benign. (i) *Receding horizon*: only $F_{\text{mpc},0}$ is applied and the QP is re-solved every Δt with a fresh $\hat{d}_{k|k}$, so the loose late-horizon predictions never reach the plant — they only shape the near-term optimum. (ii) *Short horizon*: at $N = 10$, $\Delta t = 10$ ms (100 ms; 20 ms at 500 Hz) the extrapolation term is small in absolute units — for a sustained push (the case of Theorem 2) $L_d \approx 0$ and the flat-extrapolation term vanishes (although current estimator error may remain). When the aggregate rate is $L_d \lesssim 5$ N/s, the worst-case end-of-horizon error is $L_d N \Delta t \lesssim 0.5$ N, a small fraction of the available control authority. (iii) *Structured augmentation*: when the human force has known temporal structure — physiological tremor (8–12 Hz) or a slow guidance ramp — the random-walk block can be replaced by the corresponding internal model (a harmonic-oscillator state at the tremor frequency, or a constant-plus-ramp double integrator) so that the component is *predicted* forward exactly rather than extrapolated flat. This grows the estimator by a few states, leaves the constant- A_d error block (and hence the precomputed Φ) untouched, and removes that component from L_d in (13).

Metric. The natural diagnostic is the N -step disturbance-prediction RMS, $\varepsilon_N = \text{RMS}_k \|d_k - \hat{d}_{k|k-N}\|$ — the error of the estimate propagated N steps before the measurement — monitored alongside the one-step value ε_1 . For the step-force benchmark (Section VI) the disturbance is piecewise constant, so $\varepsilon_N \approx \varepsilon_1$ except across the force-onset transient. In the supplementary time-varying-force experiment (Sec. S7, Table S4), simulator-ground-truth d_k is reconstructed from the rigid-body acceleration identity and used to evaluate both ε_1 and ε_N directly. Across the tested rates, the measured ε_N stays below the RMS counterpart of (13); this is a numerical check over the stated protocol, not a proof for untested contacts or sensing conditions.

IV. ORIENTATION STABILIZATION AND NULL-SPACE CONTROL

A. Orientation Stabilization

Orientation is regulated by a PD law in operational space [16]. The axis-angle error $e_R \in \mathbb{R}^3$ is extracted from $R_d^\top R$ [15]:

$$\tau_{\text{orient}} = J_\omega^\top (-K_{\text{rot}} e_R - D_{\text{rot}} \omega) \quad (14)$$

with $K_{\text{rot}} = 20 \text{ Nm/rad}$, $D_{\text{rot}} = 6 \text{ Nm.s/rad}$, following the operational-space impedance structure of [16], [18]. This runs at 1 kHz as a *separate* control channel from the translational QP in (4) — not a dynamically decoupled one: the null-space projector $\bar{N}^\top$ there applies only to τ_{null} , and $J_\omega^\top F_{\text{orient}}$ still couples into translational acceleration through the mass matrix, as (7)'s orientation-coupling term makes explicit. That residual dynamic coupling is part of $d_{\text{acc}}(t)$ (7), whose force-equivalent is what $\hat{d}$ estimates and cancels — not eliminated by projection.

B. Null-Space Joint-Limit Safety and Invariance

Because both the translational MPC channel and the orientation PD channel are actively controlled, the primary task is the full 6-DOF pose; for the FR3 ($n = 7$) this leaves $n - 6 = 1$ null-space DOF. The null-space torque $\bar{N}^\top \tau_{\text{null}}$ (where $\bar{N} = I - \bar{J}J$ [16], [17] is the projector of the full pose Jacobian) does not affect end-effector position or orientation [17].

Null-space inverse-barrier. Joint-limit regulation via null-space repulsive potentials is a standard secondary objective [16], [19]. Define the clearance (in rad) to the nearest limit:

$$\phi_i(q) = \min(q_i - q_{\min,i}, q_{\max,i} - q_i) \geq 0$$

The inverse-barrier gradient [19]:

$$g_i(q) = \begin{cases} +k_b \left(\frac{1}{\phi_i} - \frac{1}{\delta_i} \right) & \phi_i < \delta_i, q_i \text{ near lower limit} \\ -k_b \left(\frac{1}{\phi_i} - \frac{1}{\delta_i} \right) & \phi_i < \delta_i, q_i \text{ near upper limit} \\ 0 & \text{otherwise} \end{cases} \quad (15)$$

with threshold $\delta_i = \eta(q_{\max,i} - q_{\min,i})$ ($\eta = 0.10$), $k_b = 50 \text{ Nm}$. Combined with a centering spring [17]:

$$\tau_{\text{null}} = -k_{\text{null}}(q - q_0) + g(q) - d_{\text{null}}\dot{q} \quad (16)$$

with $k_{\text{null}} = 10 \text{ Nm/rad}$, $d_{\text{null}} = 2 \text{ Nm.s/rad}$, toward the FR3 neutral pose $q_0 = [0, -0.785, 0, -2.356, 0, 1.571, 0.785]^\top$.

Task-space workspace projection. When joints approach limits, the null-space alone cannot prevent violations for task-constrained DOF [19]. We additionally project via the Jacobian pseudo-inverse [16]:

$$\delta p = k_{\text{ws}} (J_v J_v^\top + \epsilon_r I)^{-1} J_v g(q), \quad \|\delta p\| \leq p_{\max} \quad (17)$$

with $k_{\text{ws}} = 5 \times 10^{-4} \text{ m/(Nm/rad)}$, $p_{\max} = 0.06 \text{ m}$, Tikhonov regularization $\epsilon_r = 10^{-8}$ [15]. The QP optimizes toward $p_{d,\text{eff}} = p_d + \delta p$.

Conditional sampled-data joint-limit filter. The dual-barrier controller above provides practical joint-limit regulation. A conditional forward-invariance certificate is obtained by adding a one-step joint-limit control-barrier filter to the commanded torque. Let

$$h_i^-(q) = q_i - q_{\min,i} - \epsilon, \quad h_i^+(q) = q_{\max,i} - \epsilon - q_i,$$

and define the certified safe set

$$\mathcal{C}_\epsilon = \{q : h_i^-(q) \geq 0, h_i^+(q) \geq 0, i = 1, \dots, n\}.$$

At sampling time k , approximate the next joint position under a constant torque over one servo period T_s by

$$q_{k+1|k} = q_k + T_s \dot{q}_k + \frac{1}{2} T_s^2 M^{-1}(q_k) (\tau_k + \hat{\tau}_{\text{ext},k} - b_k), \quad (18)$$

where $b_k = C(q_k, \dot{q}_k) \dot{q}_k + G(q_k)$, $\hat{\tau}_{\text{ext},k} = J^\top(q_k) \hat{\mathcal{F}}_{h,k}$ is the measured or estimated external generalized force, and τ_k is the final command after the nominal MPC and null-space terms. If no reliable external-force estimate is available, both the lower- and upper-limit inequalities in (19) should be robustly tightened using a bound on $\|\tau_{\text{ext}} - \hat{\tau}_{\text{ext}}\|$ propagated through $\frac{1}{2} T_s^2 M^{-1}(q_k)$. The safety filter selects the closest feasible torque to the nominal command subject to

$$h_i^\pm(q_{k+1|k}) \geq (1 - \alpha) h_i^\pm(q_k), \quad i = 1, \dots, n, \quad \alpha \in (0, 1]. \quad (19)$$

Since (18) is affine in τ_k , (19) adds linear inequalities to the final torque projection.

Theorem 3 (Sampled-Data Joint-Limit Invariance). *Assume $q_0 \in \mathcal{C}_\epsilon$, the model used in (18), including $\hat{\tau}_{\text{ext},k}$ or a valid two-sided robust tightening, matches the sampled plant at $k+1$ or encloses it within the tightened lower/upper bounds, and the safety-filter constraints (19) are feasible and enforced at every sample. Then $\mathcal{C}_\epsilon$ is forward invariant for the sampled joint positions: $q_k \in \mathcal{C}_\epsilon$ for all $k \geq 0$.*

Proof. Suppose $q_k \in \mathcal{C}_\epsilon$. Then $h_i^\pm(q_k) \geq 0$ for every joint. By (19),

$$h_i^\pm(q_{k+1}) = h_i^\pm(q_{k+1|k}) \geq (1 - \alpha) h_i^\pm(q_k) \geq 0,$$

where equality between q_{k+1} and $q_{k+1|k}$ follows from the one-step model-matching assumption. Hence $q_{k+1} \in \mathcal{C}_\epsilon$. Induction from $q_0 \in \mathcal{C}_\epsilon$ proves the claim. $\square$

The theorem is deliberately conditional: it certifies invariance only when the one-step constraints are feasible and enforced. In the implementation the filter is the *final* torque projection (after the nominal MPC and null-space terms), so it takes priority over the soft null-space barrier and workspace projection, which only *bias* the arm away from limits. When the constraints (19) cannot all be met — e.g., barrier and CBF pull in conflicting directions, or τ_{base} alone is already limit-inducing — they are relaxed with a penalized slack $s \geq 0$ ($\min \|\tau - \tau_{\text{nom}}\|^2 + w s^2$ s.t. $h_i^\pm(q_{k+1|k}) \geq (1 - \alpha) h_i^\pm(q_k) - s$), returning the minimum-violation command rather than reporting infeasibility; a logged $s = 0$ is exactly the per-sample certificate that the theorem held without relaxation. The experiments below report the empirical behavior of the dual-barrier joint-limit regulation law; hardware runs intended to claim certified joint-limit safety should log the CBF residuals and the slack s . The certificate is sampled-data: possible intersample motion is covered only to the extent that the margin ϵ and any robust tightening dominate the within-sample excursion.

Remark 6 (Robust tightening bound and ISSf). *Let $\delta\tau_k$ collect the unmodeled generalized force in the one-step predictor (human-torque estimation error $J^\top(F_h - \hat{F}_h)$, finite-jerk torque change, and inertial-model error), with $\|\delta\tau_k\| \leq B_\tau$. The induced one-step position error $\frac{1}{2} \Delta t^2 M^{-1} \delta\tau_k$ is bounded by $\Delta q_{\text{safe}} = \frac{1}{2} \Delta t^2 \|M^{-1}\|_2 B_\tau$; tightening the one-step constraints by Δq_{safe} makes Theorem 3 input-to-state safe—the sampled positions stay in $\mathcal{C}_\epsilon$ for any disturbance within B_τ provided $\epsilon \geq \Delta q_{\text{safe}}$. At $\Delta t = 1 \text{ ms}$ with $\|M^{-1}\|_2 \lesssim 10 \text{ kg}^{-1}$*

this is $\approx 5 \times 10^{-6} B_\tau$ rad (B_τ in N.m), well within the experimental ϵ margin.

C. Energy-Tank Passivity Layer for Co-Manipulation

The offset-free predictive controller is designed for precision disturbance rejection; intentional co-manipulation additionally needs a passivity certificate at the human-robot port. We add a sampled energy tank on the translational task channel. Let F_k^0 be the predictive task force before passivity filtering, $v_k = \dot{p}_k$ the measured end-effector translational velocity, and $E_k \in [E_{\min}, E_{\max}]$ the tank energy. The layer scales only the task force,

$$F_k = s_k F_k^0, \quad s_k \in [0, 1], \quad (20)$$

leaving feedforward, orientation, and null-space torques outside the tank accounting. Define $P_k^0 = \max\{(F_k^0)^\top v_k, 0\}$ and optional human recharge power

$$P_{h,k} = \gamma \max\{\hat{F}_{h,k}^\top v_k, 0\}, \quad \gamma \in [0, 1].$$

The scale is

$$s_k = \begin{cases} 1, & P_k^0 = 0, \\ \min\left(1, \frac{(E_k - E_{\min})/T_s + P_{h,k}}{P_k^0}\right), & P_k^0 > 0, \end{cases} \quad (21)$$

and the tank update is

$$E_{k+1} = \text{sat}_{[E_{\min}, E_{\max}]}(E_k + T_s(P_{h,k} - \max\{F_k^\top v_k, 0\})). \quad (22)$$

Proposition 2 (Sampled Passivity of the Task Channel). *If $E_0 \geq E_{\min}$ and (21)–(22) are enforced at every servo sample, then $E_k \geq E_{\min}$ for all k and*

$$\sum_{j=0}^{k-1} T_s \max\{F_j^\top v_j, 0\} \leq E_0 - E_{\min} + \sum_{j=0}^{k-1} T_s P_{h,j}.$$

Proof. By construction, (21) gives $T_s \max\{F_k^\top v_k, 0\} \leq E_k - E_{\min} + T_s P_{h,k}$. Substitution into (22) gives $E_{k+1} \geq E_{\min}$ before saturation, and the saturation preserves the lower bound. Summing the unsaturated balance gives the stated dissipation inequality. $\square$

Scope. Proposition 2 bounds only the scaled translational predictive-force channel F_k — a channel-level energy budget, not a full 6-DOF port passivity proof, and it should not be read as guaranteeing coupled stability against an arbitrary passive environment. Each excluded channel is *locally* well-behaved in isolation — the orientation channel is a passive PD ($K_{\text{rot}}, D_{\text{rot}} > 0$) with respect to its own $(\tau_{\text{orient}}, \omega)$ port, the null-space torque only redistributes energy within the redundant subspace, and the feedforward gravity/Coriolis compensation is workless at steady state — but this does not by itself bound the *cross-coupling* power these channels can deliver into translation through the mass matrix: (7) explicitly retains an orientation-to-translation coupling term $-J_v M^{-1} J_\omega^\top F_{\text{orient}}$, so τ_{orient} can do translational work the tank accounting does not see. A full-port certificate — bounding the coupled channels jointly, not just each in isolation — is a genuine extension, not a straightforward one, and is left to future work.

TABLE I
COMPUTATIONAL BUDGET PER CONTROL LAYER

Layer	Computation	Rate	Budget
Feedforward	$\tau_{\text{ff}}: \text{qfrc_bias} + J_v^\top \Lambda \ddot{p}_d$	1 kHz	<0.1 ms
QP	OSQP, 30 vars, first torque row	100 Hz	<1 ms
Kalman	9-state predict + update	100 Hz	<0.1 ms
Orientation	$J_\omega^\top (-K_{\text{rot}} e_R - D_{\text{rot}} \omega)$	1 kHz	<0.1 ms
Null-space	Barrier gradient + projection	1 kHz	<0.1 ms

TABLE II
PER-TICK SOLVE TIME AND DEADLINE MISSES

Rate	Mean [ms]	p50 [ms]	p99 [ms]	Max [ms]	Deadline [ms]	Misses
100 Hz (C5)	0.57	0.54	0.75	24.15 [†]	10.0	1/2400
500 Hz (C7)	0.51	0.49	0.71	1.65	2.0	0/12000

In hardware logs, the certificate is the tuple `passivity_certified`, `passivity_energy`, and `passivity_scale`. The default $\gamma = 0$ gives a conservative certificate; $\gamma > 0$ allows a configured fraction of measured human input work to recharge the tank.

V. REAL-TIME IMPLEMENTATION

The optimization dimension is independent of the number of joints, but the implementation is not robot independent: it requires $M, C\dot{q} + G$, the full Jacobian and pose projector, joint limits, and actuator constraints. Substituting those interfaces preserves the 30-variable Layer-2 QP. Reference implementation uses the Franka FR3 via FCI [14].

QP solver. We use OSQP [20] with warm-starting, which in our simulation implementation reduced cold-start latency from 5 ms to under 0.5 ms (single-threaded, commodity CPU). Table II reports measured per-tick wall-clock time (Kalman step, $\Gamma/H/h$ rebuild, warm-started OSQP solve, and torque assembly) for C5 and C7 over the Benchmark I protocol, on a single-threaded Python/OSQP implementation (Apple M1 Max) — a simulation-side timing characterization, not a validated embedded or real-time-kernel deployment.

[†]One-time OSQP problem setup on the episode's first tick; excluding it, the steady-state maximum is 1.04 ms and both rates have zero misses. Timing excludes the separate MuJoCo dynamics query.

Although $H = \Gamma^\top \bar{Q} \Gamma + \bar{R}$ varies with configuration through $B_d(\rho_k)$, updating it requires only overwriting the pre-allocated non-zero elements of the upper-triangular CSC sparse matrix — a $O(N^2)$ coefficient update completed in under 0.05 ms via `osqp_update_P`, preserving OSQP's factorization-reuse structure. The linear term $h = \Gamma^\top \bar{Q} x_{\text{free}} + \bar{R} d_N$ is updated similarly via the OSQP linear-cost update; the $+\bar{R} d_N$ term is required by the offset-free input-centering argument in Theorem 2.

ZOH policy. Between QP solves, F_{mpc} is held constant. Layer 1 (τ_{ff}) is recomputed at 1 kHz from fresh $(q, \dot{q})$, continuously cancelling gravity and Coriolis.

Simulation. All experiments use the FR3 model from MuJoCo Menagerie [21] with the MuJoCo physics engine [22] at 1 kHz. The hardware-path MuJoCo verification suite runs the same FR3 interface used for real deployment, including

TABLE III
BENCHMARKED CONTROLLERS

ID	Controller	Disturbance estimator
C1	Classical Impedance	—
C2	Admittance ($K_a = 100$ N/m)	Virtual spring
C3	PI Impedance ($K_{int} = 80$ N/(m·s))	Integral
MPVIC	Var.-Imp. MPC, 100 Hz	Kalman (sched.)
C4	DI-MPC, 100 Hz	None
C5	DI-MPC + Kalman, 100 Hz	Augmented Kalman
C6	DI-MPC, 500 Hz	None
C7	DI-MPC + Kalman, 500 Hz	Augmented Kalman

TABLE IV
BENCHMARK I — CIRCULAR TRAJECTORY, 15 N STEP FORCE

Controller	RMS total [mm]	RMS contact [mm]	Peak defl. [mm]	SS err. [mm]
C1 – Impedance	35.6	41.1	51.8	44.8
C2 – Admittance	113.9	174.7	210.5	186.7
C3 – PI Impedance	36.2	27.4	43.7	21.4
MPVIC – Var.-Imp. MPC	12.9	4.5	7.5	4.8
C4 – MPC 100 Hz	11.4	2.2	2.9	2.8
C5 – MPC+K 100 Hz	11.4	0.5	2.6	<0.05
Observer – fixed gain+K	11.6	0.5	2.4	0.055
C6 – MPC 500 Hz	12.8	0.8	1.1	1.1
C7 – MPC+K 500 Hz	12.7	0.32	1.48	0.029

torque-rate limiting, the one-step CBF projection, and the energy-tank passivity filter; direct benchmark scripts are used only for algorithm comparisons and figures.

Every numeric constant used across the experiments of Section VI is consolidated in Table S1 of the supplementary material.

VI. EXPERIMENTS

We evaluate the controller on two dynamic benchmarks and two stress tests, followed by one focused fairness study. **DI-MPC** denotes the proposed double-integrator MPC realization, and **MPVIC** is the predictive variable-impedance comparator, in the class of [12], [23]. MPVIC rolls out the same horizon and uses the same estimate $\hat{d}$ as the proposed controller, but only to *schedule* the apparent stiffness $K^* \in \{200, \dots, 3000\}$ N/m rather than to cancel the force — isolating variable-impedance adaptation from offset-free augmentation. Controllers in the original benchmark use $K_d = 300$ N/m nominal, critically damped, with the inner feedforward loop running at 1 kHz for every variant. Tables report every controller; plots show four representative curves (D1–D3, D7) for readability.

Benchmark I — circular trajectory under step force. The end-effector tracks a 12 cm radius circle in the XZ sagittal plane ($\omega = 2\pi/8$ rad/s) while a 15 N step force $F_h = [0, 0, -15]$ N is applied for 3 s of every 8 s cycle (3 cycles, 24 s total); metrics are averaged over the three force events.

The original comparison isolates the estimator and update-rate mechanisms; the gain-confounded C1–C4 contrast is resolved separately below.

- **Kalman augmentation removes steady-state error (C4 vs. C5).** With QP rate and horizon held fixed, folding $\hat{d}$ into the free response drives steady-state error below 0.05 mm

FR3 pHRI Benchmark: Circular Trajectory + Step Human Force

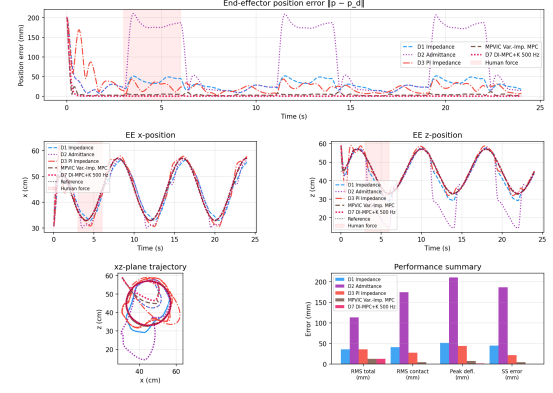


Fig. 1. Benchmark I — Circular trajectory under 15 N step pHRI. For visibility the plot shows D1/D2/D3/D7 (corresponding to C1/C2/C3/C7) plus the predictive variable-impedance MPVIC baseline; Table IV reports the full ablation. The final D7 controller achieves near-zero steady-state error and sub-millimeter peak deflection, while MPVIC—though predictive—retains a visible steady-state offset.

— down from 2.8 mm over C4 and 44.8 mm over C1. Only the offset-free disturbance-augmentation mechanism differs between C4 and C5; horizon, weights, update rate, and torque interface are identical.

- **The estimator, not horizon prediction, drives the improvement (Observer vs. C5).** To isolate the estimator’s credit from the receding-horizon optimization’s, the *Observer* row tracks $F = K_e e + K_{\dot{e}} \dot{e} - \hat{d}$ with $[K_e, K_{\dot{e}}]$ fixed to C5’s own realized unconstrained first-move gain (Theorem 1), evaluated once, so no horizon is re-optimized online; it uses the identical Kalman estimator. It matches C5 closely (0.5 mm contact RMS both, 2.4 vs. 2.6 mm peak) and nearly matches its steady-state error (0.055 vs. <0.05 mm), confirming that the estimator accounts for most of the reported improvement under nominal actuation headroom. §S10 isolates the effect of embedding and relaxing the applied-torque row under active actuation limits, by tightening the torque budget until the two mechanisms separate.
- **Nominal impedance versus MPC is gain-confounded (C1 vs. C4).** The 300 N/m C1 setting is intentionally compliant and is not C4’s realized closed-loop gain. We therefore do not interpret their ratio as an architecture effect; Table V supplies a calibrated comparison.
- **Adapting stiffness alone is not enough (MPVIC vs. C5).** MPVIC uses the *same* $\hat{d}$ as C5 but only to schedule stiffness, cutting contact RMS to 4.5 mm — better than every reactive baseline — yet it retains a 4.8 mm steady-state error, since a finite apparent stiffness can only bound deflection at $e_{\infty} = -K^{*-1} \hat{d} \neq 0$. Offset-free cancellation (Theorem 2) removes this residual entirely ($\sim 114\times$). MPVIC is our own discrete-stiffness scheduler in the family of [12], [23], not a reproduction of a specific published algorithm; its stiffness set and force penalty have not been swept for sensitivity.
- **Rate and estimation are not fully orthogonal (C4–C7).** Raising the QP rate from 100 to 500 Hz mainly shrinks the zero-order-hold transient; adding the Kalman estimator mainly removes the steady-state error. C7 combines both and gives the lowest contact-window RMS and, of the exactly

TABLE V
FOCUSED FAIR COMPARISON, 15 N REPEATED STEP

Controller	Contact RMS [mm]	SS [mm]	Sat. [%]	Peak P^+ [W]
Nominal impedance, 300 N/m	41.07	44.82	0	22.5
Calibrated impedance	2.38	2.59	0.45	378.2
Tuned anti-windup PI	27.10	20.38	0	58.3
Matched imp.+measured-force FF	1.40	1.39	0.45	378.2
C4: DI-MPC 100 Hz	2.20	2.77	0	113.2
C5: DI-MPC+estimate 100 Hz	0.53	0.042	0	113.1

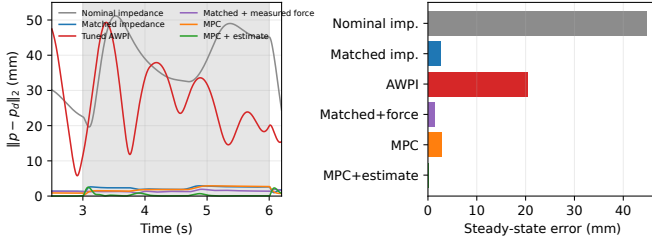


Fig. 2. Held-out three-cycle fair comparison. Calibration largely closes the nominal-impedance/C4 gap, whereas the C4–C5 pair isolates the effect of force-domain disturbance augmentation. Direct measured-force feedforward also removes most load-axis bias, while the matched impedance realizations briefly saturate and reach substantially higher peak positive joint power.

reported values, steady-state error of any controller. Under the rate-proportional Q_w scaling of Table S1, however, C7 no longer has the lowest peak deflection: C6’s 1.1 mm undercuts C7’s 1.48 mm, since at 500 Hz the faster rate alone already damps the first-contact transient and the estimator’s additional corrective action adds excess control effort during that same window. C7’s total RMS (12.7 mm, averaged over the whole cycle) is marginally higher than C4/C5’s (11.4 mm), since the faster rate sharpens the contact transient without improving free-motion tracking.

- **Admittance yields by design (C2).** Its 174.7 mm contact-window RMS is close to the equilibrium prediction $15/100 = 150$ mm, the expected behavior of intentional compliance.

Focused fair comparison under a common actuator budget. To remove the stiffness confound, a separate one-cycle calibration first estimates C4’s equilibrium stiffness as $\|F_h\|/\|e_{ss}\| = 5441$ N/m. A 3×3 grid over stiffness scale (0.8, 1.0, 1.2) and damping ratio (0.7, 1.0, 1.3) then minimizes the sum of contact-onset trajectory RMSE and steady-state mismatch to C4; it selects $K = 5441$ N/m and $\zeta = 1.3$. A torque-aware PI baseline is independently tuned over nine (K_i, I_{max}) pairs. We also include first-order filtered measured-force cancellation (50 ms time constant) on the *stiffness-and-damping-calibrated* impedance backbone. It receives the exact simulated wrench and is therefore a favorable sensor-based comparator. This is a deliberately simple disturbance-rejection baseline motivated by force-estimation and ADRC approaches [9], [13], not a reproduction of either published algorithm. Final metrics use three evaluation cycles of the same periodic trajectory, not independently randomized scenarios. Every method uses the same 1 kHz realization and FR3 torque limits [87, 87, 87, 87, 12, 12, 12] Nm.

The calibrated impedance and C4 have similar steady-state

TABLE VI
BOUNDARY TEST, $R = 20$ CM CIRCLE

Controller	RMSE [mm]	Min margin	Result
IMP	25.87	0.049	LIMIT VIOLATION
MPC (C5, 100 Hz QP)	13.33	0.083	AVOIDED
MPC (C5, 30 Hz QP)	11.76	0.083	AVOIDED

errors (2.59 and 2.77 mm), so the original C1–C4 ratio is not evidence of a new prediction capability. Their transient resource use differs: the matched impedance reaches 378.2 W peak positive joint power and saturates in 0.45% of samples, versus 113.2 W and no physical saturation for C4. Here “Sat.” means that the raw command exceeds a joint magnitude limit by more than 10^{-3} Nm; no torque-rate, CBF, or tank filter is used in this focused script. Both MPC variants complete all 2400 QP solves with zero failures. Their largest raw limit excesses are only 3.2×10^{-6} and 1.9×10^{-5} Nm, respectively—OSQP feasibility-tolerance effects below the saturation threshold—and no excess occurs between QP updates. Most importantly, C4 and C5 have identical horizon, weights, and torque interface; adding the disturbance state reduces steady-state error by $65.8\times$ without increasing peak positive joint power. The matched measured-force baseline reduces total steady-state error to 1.39 mm and force-axis error to 0.50 mm. Thus current-step force cancellation also rejects the constant load, as expected; its remaining error is moving-reference tracking in the other task directions. C5 does not require direct force measurement and reaches 0.042 mm total error. The PI baseline also improves on nominal impedance but does not match C5 in this experiment. These results establish a tradeoff in this benchmark, not general superiority over published ERG, action-governor, or predictive-safety-filter implementations.

Empirical joint-limit avoidance by the dual soft barrier (boundary test). A 20 cm radius circle pushes the arm toward its workspace boundary (Table VI, Fig. 3), exercising the soft null-space barrier and workspace projection only; the final CBF filter (Theorem 3) is not engaged or logged here.

- Classical impedance violates the 5% margin; the dual-barrier MPC avoids it, holding a 0.083 margin at both 100 and 30 Hz — joint-limit avoidance is insensitive to QP rate.
- The elevated MPC RMSE (13.3 mm vs. 0.3 mm at $R = 12$ cm) reflects the workspace projection deliberately trading tracking accuracy for clearance near the boundary.

Robustness to position-measurement noise and model mismatch. The architecture depends on a Kalman estimator, sensitive to measurement noise, and on Layer-1 cancellation, sensitive to model error, so we stress-test each independently: the plant is always the true model, and only the controller’s inputs (added EE-position noise) or its model (the feedforward inertia Λ , scaled up by 0 to 30% relative to the true plant) are perturbed. Velocity noise, sensing latency, and force-sensor noise are not modeled here.

- Under a 10 N step (last 0.5 s, 5 seeds), even 5 mm (1σ) position noise leaves steady-state error below 1 mm and raises the transient peak only from 1.6 to 2.2 mm.
- Under free-space XZ-circle tracking with a deliber-

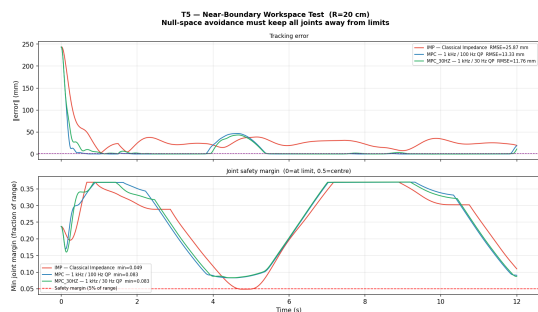


Fig. 3. Boundary test ($R = 20$ cm). Classical impedance violates the 5% joint margin; the dual-barrier MPC maintains a fractional joint margin ≥ 0.083 throughout. Elevated RMSE (13.3 mm) reflects the workspace projection intentionally offsetting p_d by up to 6 cm to maintain joint-limit clearance.

TABLE VII
ROBUSTNESS OF MPC+KALMAN (100 Hz QP)

(a) EE position noise — 10N step, SS error (5 seeds)			
noise 1σ	0 mm	1 mm	2 mm / 5 mm
SS err (mm)	0.08	$0.19 \pm .03$	$0.37 \pm .04$ / $0.89 \pm .07$
(b) Inertia mismatch — free-circle RMSE (mm)			
inertia error	0%	+10% / +20%	+30%
Kalman on	0.24	0.24 / 0.23	0.23
Kalman off	0.94	0.86 / 0.79	0.73

ately wrong feedforward inertia (bottom table), Kalman-augmented RMSE stays nearly unchanged through 30% inertia error ($0.24 \rightarrow 0.23$ mm), whereas disabling Kalman gives 0.73–0.94 mm ($3\text{--}4\times$ worse), isolating the disturbance state’s contribution.

Further experiments and parameters. The supplementary material contains all parameters (Table S1), a ground-truth horizon-prediction check (S4), a force magnitude/shape sweep (S5), and the C8 correction-authority ablation (S6).

VII. DISCUSSION AND CONCLUSION

We presented a compact offset-free interaction-error MPC realization: operational-space cancellation gives a constant- A predictor, force-domain augmentation shares the optimized force channel, and an affine constraint acts on the complete applied torque, combined with conditional impedance-equivalence, offset-free, and stabilizability results that state exactly when each guarantee holds — a validated engineering interface built from established MPC, LPV, barrier, and passivity tools rather than a new control-theoretic primitive.

Where this places the contribution. The double-integrator representation is a general pattern for physical interaction, not one particular to a fixed base: in selected task coordinates, after nominal dynamic compensation, interaction reduces to a fixed linear system driven by a single disturbance state, which is what makes it a predictive quantity rather than a property re-modeled per contact or configuration. In a model-based Physical AI stack — perception and planning reasoning about the world and the task, and a fast interaction interface turning that into torque — this paper establishes the base case of that shared representation: a single fixed contact point, exact in force coordinates. “Physical AI” names that placement; it is not an additional experimental claim. We

call the shared double-integrator, force-domain representation itself **Interaction Dynamics**. The same construction has since been developed for floating-base humanoid locomotion [24], reactive time-domain motion planning under dynamic-obstacle interaction [25], dexterous manipulation [26], and steerable-catheter tissue interaction [27], each inheriting this paper’s constant-transition structure and specializing the input matrix to its own actuation and contact model; none of those extensions is evaluated here.

Under a shared actuator budget and torque interface, the controlled C4–C5 ablation shows that the augmented disturbance estimate alone reduces steady-state error from 2.77 to 0.042 mm — a $65\times$ improvement obtained without direct force sensing, and without the brief saturation and $3.3\times$ higher peak positive joint power a stiffness-and-damping-calibrated impedance baseline requires to reach a comparable 2.59 mm. The soft-barrier joint-limit avoidance, the energy-tank passivity channel, and the disturbance-prediction bound each hold over their respective tested and certified scope, detailed in the corresponding sections above.

These results are established in a 7-DOF torque-controlled MuJoCo simulation with model mismatch tested up to 30%. Extending this evaluation to hardware — logging tracking, force estimates, applied torque, CBF residual/slack, and tank energy against a canonical predictive interaction controller under shared tuning — is the natural next step for this architecture.

This document accompanies the main paper and contains: the full controllability/detectability argument and LMI-based stabilizability proof for the LPV backbone, the parameter table, and additional experiments that supplement, but are not required to follow, the main paper's core argument — the waypoint-hold benchmark (redundant with Benchmark 1's conclusions), the time-varying-force horizon-prediction study, the human-force magnitude/shape sweep, and the impedance-backbone correction-authority ablation. Table numbers here are prefixed "S" and are independent of the main paper's numbering.

S1. CONTROLLABILITY AND DETECTABILITY OF THE LPV BACKBONE

Remark S1 (Controllability and Detectability). *The frozen pair in (8) of the main paper is pointwise controllable at every fixed configuration ρ in the singularity-free workspace. Since $\Lambda(q)$ in eq. (2) is symmetric positive-definite for all q away from kinematic singularities, $\Lambda^{-1}(q)$ is full rank, so $B_d(\rho_k)$ has full column rank 3 (via its velocity block). With A_d mixing velocity into position, the position rows of B_d and $A_d B_d$ differ by $-\Lambda^{-1}(q)\Delta t^2$ (full rank), so the controllability matrix $\mathcal{C} = [B_d \mid A_d B_d]$ has rank 6 for all ρ_k . If $Q \succeq 0$, $R \succ 0$, and $(Q^{1/2}, A_d)$ is detectable, the discrete algebraic Riccati equation (DARE) admits a stabilizing solution at every fixed configuration, and the infinite-horizon LQR gain*

$$K_\infty = (R + B_d^\top P_\infty B_d)^{-1} B_d^\top P_\infty A_d$$

is well-defined everywhere, with the feedback convention $F_{mpc} = -K_\infty x_e$. For the augmented estimator, observability of $[e; \dot{e}]$ together with full column rank of B_d makes the constant disturbance state detectable: if a mode is unobservable from $C = [I_6 \ 0]$, its x_e component is zero; the augmented dynamics then require $B_d d = 0$, hence $d = 0$.

This is the basis for Corollary 1's DARE-solvability claim and for the LPV-backbone stabilizability result of Sec. S2.

S2. COMMON-QUADRATIC STABILIZABILITY OF THE SCHEDULED ERROR PREDICTOR

Theorem S1 (Quadratic Stabilizability of the Scheduled Error Predictor). *Consider the LPV error predictor $x_{e,k+1} = A_d x_{e,k} + B_d(\rho_k) F_{mpc,k}$ with constant A_d and $B_d(\rho)$ as in eq. (8) of the main paper, and suppose the operational-space inverse-inertia stays in a compact polytope over the operating region of interest, $\Lambda^{-1}(q) \in \mathcal{P} = \text{conv}\{L_1, \dots, L_V\}$ (e.g. the entry-wise box with $0 \prec \lambda_{\min} I \preceq \Lambda^{-1}(q) \preceq \lambda_{\max} I$) — a certified bound on $\Lambda^{-1}(q)$, either established analytically over the entire singularity-free workspace or, as instantiated in Remark S3 below, sampled over a specific operating region — with vertex input matrices $B_v = [-\frac{\Delta t^2}{2} L_v; -L_v \Delta t]$ (affine in $\Lambda^{-1}(q)$, so the polytope structure is preserved). If there exist $Q = Q^\top \succ 0$ and $Y \in \mathbb{R}^{3 \times 6}$ and a prescribed $0 < \varrho < 1$ such that, for every vertex $v = 1, \dots, V$,*

$$\begin{bmatrix} \varrho^2 Q & (A_d Q + B_v Y)^\top \\ A_d Q + B_v Y & Q \end{bmatrix} \succ 0, \quad (23)$$

then the fixed state-feedback law $F_{mpc} = K x_e$ with $K = Y Q^{-1}$ makes $V(x) = x^\top P x$, $P = Q^{-1}$, a common quadratic

Lyapunov function: $V(x_{e,k+1}) < \varrho^2 V(x_{e,k})$ for every admissible configuration trajectory $\{\rho_k\} \subset \mathcal{P}$, so this one fixed linear feedback law is exponentially stabilizing uniformly over $\mathcal{P}$ — not only at a frozen configuration. This is a statement about the LPV backbone under a single certified feedback gain, not directly about the finite-horizon receding-horizon MPC actually deployed (see the scope remark below).

Proof. $B_d(\rho)$ is affine in $\Lambda^{-1}(q)[\rho]$, so for any ρ with $\Lambda^{-1}(\rho) = \sum_v \alpha_v L_v$ ($\alpha_v \geq 0$, $\sum_v \alpha_v = 1$) we have $A_d Q + B_d(\rho) Y = \sum_v \alpha_v (A_d Q + B_v Y)$. The block matrix in (23) is affine in this quantity, and the positive-definite cone is convex, so (23) holds for all $\rho \in \mathcal{P}$, not only at the vertices. Taking the Schur complement of the lower-right block gives $(A_d Q + B_d(\rho) Y)^\top Q^{-1} (A_d Q + B_d(\rho) Y) \prec \varrho^2 Q$. Writing $A_{cl}(\rho) = A_d + B_d(\rho) K$ with $K = Y Q^{-1}$ and pre/post-multiplying by $Q^{-1} = P$ yields $A_{cl}(\rho)^\top P A_{cl}(\rho) - \varrho^2 P \prec 0$, for all $\rho \in \mathcal{P}$. Hence $V(x) = x^\top P x$ decreases along every trajectory regardless of how ρ_k varies, which is exponential stability of this fixed-gain, disturbance-free LPV closed loop. $\square$

This is the polytope-level counterpart of the per-configuration DARE solvability of Remark S1 and the continuous scheduled law of Corollary 1 of the main paper: it certifies that the interaction-error representation — enabled by the constant A_d , which confines all configuration variation to the affine $B_d(\rho)$ and makes (23) a finite vertex program — is quadratically stabilizable by a single Lyapunov function over $\mathcal{P}$, under one fixed certified gain.

Scope. Theorem S1 establishes exponential stability of the nominal predictive backbone under one fixed, LMI-certified linear feedback gain — the disturbance-free LPV closed loop $(A_d, B_d(\rho))$, with the input constraint inactive — not workspace-wide stability of the complete deployed controller. In particular it does **not** by itself analyze: the disturbance estimator (offset-free tracking under the Kalman estimator is the separately scoped Theorem 2 of the main paper, and is not composed with Theorem S1 here); the finite-horizon receding-horizon re-solve, whose realized policy at each step is the QP's actual minimizer, not the certified fixed K (the unconstrained QP realizes a member of this same class of linear state feedback, Theorem 1/Corollary 1 of the main paper, but not necessarily the specific certified K); or the safety and passivity filters (Theorem 3, Proposition 2 of the main paper). The complete controller's closed-loop guarantees are therefore this collection of separately-scoped results about different feedback laws, not one monolithic proof that the deployed MPC is workspace-stable.

Remark S2 (Rate-independence and the frozen horizon). *The certificate uses a single, parameter-independent Lyapunov matrix $P = Q^{-1}$ shared by all vertices. A common- P quadratic stability certificate is robust to arbitrary time variation of $\rho_k \in \mathcal{P}$ — including arbitrarily fast changes — with no assumption on the parameter-variation rate $\|\rho_{k+1} - \rho_k\|$: the Lyapunov decrease holds at every vertex and hence, by convexity of (23) in $\Lambda^{-1}(q)$, for any $\rho_k \in \mathcal{P}$ regardless of how it moves, provided the certified fixed K is what is*

actually applied. This gives a structural reason, not a proof, for why the frozen- Γ approximation used online (built from the current $B_d(q_k)$ and held over the N -step horizon) is unlikely to be destabilizing: the gap between $B_d(q_k)$ and the true future $B_d(q_{k+i})$ is a bounded variation inside $\mathcal{P}$, and a fixed- K closed loop over $\mathcal{P}$ would not be destabilized by that variation regardless of its rate. This motivates, but does not establish, that the deployed receding-horizon policy — which re-solves a QP rather than applying the certified K — inherits the same robustness; the frozen horizon shapes only the predicted trajectory, while the receding-horizon re-solve keeps the applied first move matched to the current ρ_k , but no result in this paper proves the resulting closed loop shares Theorem S1’s rate-independence.

Remark S3 (Numerical instantiation of $\mathcal{P}$). For the FR3, sampling $\Lambda^{-1}(q)$ along the main paper’s §V circular benchmark (4700 samples) gives $\text{eig } \Lambda^{-1}(q) \in [0.059, 0.354] \text{ kg}^{-1}$ (task inertia 2.8–16.9 kg). The resulting entry-wise box has 64 corners in general, but not every corner of an independent per-entry box need be positive-definite; we discard any that are not (none were, here — all 64 corners were confirmed SPD, minimum eigenvalue $\approx 0.023 \text{ kg}^{-1}$ across vertices, comfortably above the regularization floor). Direct entry-wise auditing reports zero containment violation for all 4700 samples. This instantiates $\mathcal{P}$ over the sampled operating region traversed by the benchmark trajectory, not a verified bound over the entire singularity-free workspace; extending the certified range to other trajectories or the full workspace would need re-sampling or an analytic eigenvalue bound, neither done here. Over this $\mathcal{P}$ ($\Delta t = 10 \text{ ms}$), the minimum-condition-number common- P certificate at guaranteed rate $\rho \leq 0.996$ is feasible, returning a well-conditioned common P ($\text{cond } P \approx 2.2$) with spectral radius ≤ 0.996 and strictly negative Lyapunov increment ($\max \text{eig}(A_{cl}^T P A_{cl} - P) \approx -5 \times 10^{-3}$) at every vertex. For the exact-ZOH model, CLARABEL reports optimal; the target-rate residual $\max \text{eig}(A_{cl}^T P A_{cl} - 0.996^2 P)$ is -9.0×10^{-7} and the minimum eigenvalue of the LMI block is 9.9×10^{-7} . These checks apply for the certified fixed $K = YQ^{-1}$ — the realized MPC, with its far larger tracking weights and different (receding-horizon) policy, is not shown to converge at this rate, only observed empirically to converge faster. This establishes the qualitative backbone-stabilizability claim rigorously over the sampled region rather than empirically, and is reproducible from the released script (`lmi_workspace_stability_probe.py`).

S3. PARAMETERS

Every numeric constant used across the experiments of the main paper (§VI) and this supplement is consolidated below, cross-checked against the released files `simulation/impedance_mpc.py`, `simulation/phri.py`, and `cloud_verify/lib/fr3_hardware_interface.py` rather than restated from memory. Unless a table or figure caption states otherwise, these are the values used throughout.

Two parameter sets are estimator/CBF-internal and are not separately swept: the Kalman noise covariances and the CBF/tank constants (the latter are exercised in the

TABLE S1
CONTROLLER AND ESTIMATOR PARAMETERS

Parameter	Symbol	Value
Prediction horizon	N	10
MPC sample time (100 Hz)	Δt	10 ms
MPC sample time (500 Hz)	Δt	2 ms
Inner-loop rate	—	1 kHz
Position stage weight	Q_{pos}	$2 \times 10^4 I_3$
Velocity stage weight	Q_{vel}	$50 I_3$
Terminal cost scale	γ	5
Effort weight	R	$10^{-6} I_3$
Corrective-force bound	F_{max}	150 N
FR3 torque limits	τ_{max}	$87 \times 4; 12 \times 3 \text{ Nm}$
Λ^{-1} regularization	σ	10^{-6}
Kalman process noise	Q_d	10.0 (2.0 in C6–C7)
Kalman obs. noise (pos.)	—	10^{-3}
Kalman obs. noise (vel.)	—	10^{-2}
Orientation stiffness	K_{rot}	20 Nm/rad
Orientation damping	D_{rot}	6 Nm·s/rad
Null-space centering stiffness	k_{null}	10 Nm/rad
Null-space damping	d_{null}	2 Nm·s/rad
Null-space barrier gain	k_b	50 Nm
Barrier activation threshold	η	0.10
Workspace-projection gain	k_{ws}	$5 \times 10^{-4} \text{ m/(Nm/rad)}^\dagger$
Workspace-projection cap	p_{max}	0.06 m
Workspace-projection reg.	ϵ_r	10^{-8}
Backbone stiffness (C8)	K_{bb}	300 N/m
Backbone damping ratio (C8)	ζ_{bb}	1.0 (nominal)
CBF safety margin	ϵ	0.05 rad
CBF contraction rate	α	0.5
CBF slack penalty weight	w_s	10^8
Tank initial energy	E_0	20.0 J
Tank lower bound	E_{min}	0.05 J
Tank upper bound	E_{max}	50.0 J
Human-recharge fraction	γ (tank)	0.0
OSQP tolerances	abs., rel.	10^{-6}
OSQP iteration cap	—	4000
Circular benchmark R, T	—	0.12 m, 8 s
Human step force	F_h	15 N, $t \in [3, 6] \text{ s}$
Reference ramp time	T_{ramp}	1.5 s
FR3 neutral pose	q_0	$[0, -0.785, 0, -2.356, 0, 1.571, 0.785] \text{ rad}$

`cloud_verify` hardware-path suite rather than the direct benchmark scripts used for the main paper’s tables).

[†]Benchmarks I and II in the main paper are run with $k_{\text{ws}} = 0$: the driver scripts for those two circular/waypoint benchmarks disable workspace projection so its effect does not

TABLE S2
FREE-SPACE CIRCLE TRACKING, $R = 12$ CM, $T = 8$ S

Plane	IMP RMSE [mm]	MPC RMSE [mm]	Improvement
XZ sagittal	23.54	0.24	$\times 96$
XY horizontal	25.06	0.33	$\times 76$
YZ frontal	16.25	0.21	$\times 78$
XZ $\rightarrow$ XY tilted	25.07	0.31	$\times 80$

confound the controller-to-controller comparison. The 5×10^{-4} default above is what the boundary test in the main paper actually uses, which is where the mechanism is exercised and discussed.

S4. FOCUSED FAIR-COMPARISON PROTOCOL

The focused comparison in the main paper separates calibration from testing. Calibration uses one 8 s cycle; after selecting parameters, every reported metric is recomputed in a newly reset environment over three cycles (24 s). No test-cycle metric enters parameter selection. The stiffness-and-damping-calibrated impedance first uses $K_0 = \|F_h\|/\|e_{ss,C4}\| = 5441$ N/m, then evaluates the Cartesian product

$$K/K_0 \in \{0.8, 1.0, 1.2\}, \quad \zeta \in \{0.7, 1.0, 1.3\}.$$

The score is contact-onset trajectory RMSE relative to C4 plus absolute steady-state-error mismatch; $K = 5441$ N/m, $\zeta = 1.3$ is selected. The anti-windup PI grid is

$$K_i \in \{120, 300, 700\}, \quad I_{\max} \in \{0.02, 0.06, 0.12\} \text{ m s},$$

with score $e_{ss} + 0.25e_{\text{RMS,contact}} + 0.01r_{\text{sat}}$; it selects $K_i = 120$ and $I_{\max} = 0.02$ m s. The complete 18-run calibration ledger, selected scores, test metrics, QP counts, and saturation diagnostics are stored in `simulation/fair_offset_free_comparison.json` and regenerated by the identically named Python script.

The measured-force comparator uses the stiffness-and-damping-calibrated impedance and receives the exact applied simulation wrench through a first-order filter ($T_f = 50$ ms), commanding $-J_v^T \hat{F}_h$ in the same Cartesian force channel through which F_h enters. It reaches 1.39 mm total steady-state error (0.50 mm on the force axis), so it confirms rather than denies that current-step force cancellation rejects a constant load. Unlike C5, however, it assumes a direct force measurement. ‘‘Saturation’’ in this experiment means a raw magnitude-limit excess above 10^{-3} Nm. Both MPC variants have zero failed solves in 2400 updates and maximum raw excess below 2×10^{-5} Nm; neither uses the CBF, tank, or torque-rate filter in this focused script.

S5. FOUR-PLANE CIRCLE TRACKING

C5 (MPC + Kalman, 100 Hz QP, 1 kHz inner) is evaluated on four 3-D circle planes, complementing the XZ-plane result of Benchmark I. Table S2 reports RMSE after the 1.5 s ramp.

Analysis. The MPC maintains sub-0.35 mm RMSE across all planes, demonstrating that the $\Lambda(q)$ -adaptive compliance in the QP (eq. 9 of the main paper) handles the off-diagonal operational-space inertia coupling without plane-specific gain retuning — the controller was tuned and validated on the XZ plane alone (Benchmark I), and the other three planes are a held-out generalization check, not a separately re-tuned result.

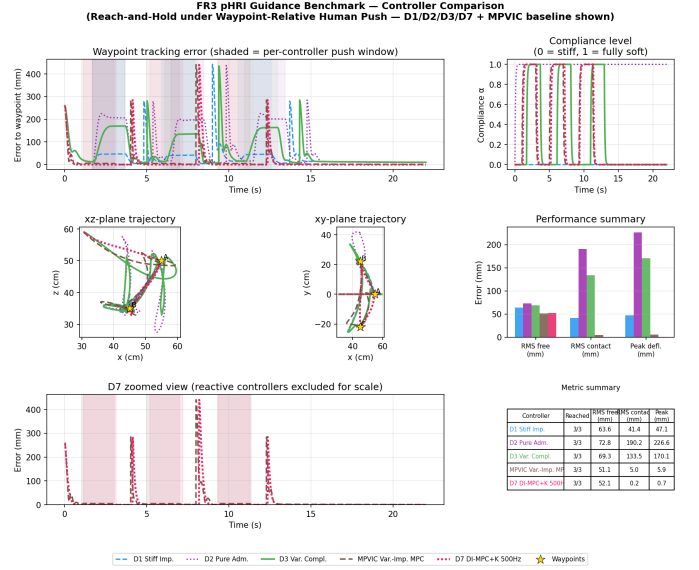


Fig. S1. Benchmark II — reach-and-hold under directionally varied push. For visibility the plot shows D1/D2/D3/D7 (corresponding to G1/G2/G3/G7) plus the predictive variable-impedance MPVIC baseline; Table S3 reports the full ablation. The final D7 controller reaches every waypoint with sub-millimeter contact-window deflection.

TABLE S3
BENCHMARK II: WAYPOINT-HOLD UNDER DIRECTIONALLY VARIED PUSH

Controller	Waypts	RMS free	RMS cont.	Peak
G1 – Stiff Impedance	3/3	63.6	41.4	47.1
G2 – Pure Admittance	3/3	72.8	190.2	226.6
G3 – Variable Compl.	3/3	69.3	133.5	170.1
MPVIC – Var.-Imp. MPC	3/3	51.2	5.0	6.0
G4 – MPC 100 Hz	3/3	47.9	2.2	2.6
G5 – MPC+K 100 Hz	3/3	47.9	0.6	2.4
G6 – MPC 500 Hz	3/3	51.9	0.8	1.0
G7 – MPC+K 500 Hz	3/3	51.5	0.37	1.42

S6. BENCHMARK II — REACH-AND-HOLD UNDER HUMAN PUSH

Scenario. The robot navigates a triangle of three waypoints (A, B, C) in one lap. At each waypoint, 0.8 s after arrival, a directionally varied 15 N push fires for 2 s. The robot must recover and dwell within 35 mm of the target for 1 s before advancing (3 push events, one per waypoint).

Analysis. The static-waypoint hold confirms the same separation seen in Benchmark I, and is included here for completeness rather than as an independent finding. All four MPC variants (G4–G7) reach every waypoint with order-of-magnitude lower contact-window deflection than the reactive baselines: against the stiff-impedance baseline (G1), the MPC cuts contact-window RMS from 41.4 mm to 2.2 mm (G4) and peak deflection from 47.1 mm to 2.6 mm. Adding the Kalman augmentation improves the contact and free-motion metrics — G5 lowers contact-window RMS from 2.2 mm to 0.6 mm and slightly reduces peak (2.6 $\rightarrow$ 2.4 mm) — so unlike a higher impedance gain it carries no peak penalty. Raising the QP rate to 500 Hz then sharpens contact-window RMS further: G7 attains 0.37 mm. Under the rate-proportional Q_w scaling of Table S1, however, it no longer has the lowest peak error — G6’s 1.0 mm undercuts G7’s 1.42 mm, mirroring the same

TABLE S4
TIME-VARYING FORCE: DIRECT GROUND-TRUTH PREDICTION ERROR
AND TRACKING

$L_{d,\text{emp}}$ [N/s]	e_K	ε_1	ε_N	Bound	RMS [mm]
0.51	2.20	2.20	2.20	2.25	0.08
7.57	0.88	0.90	1.13	1.64	0.12
15.13	2.45	2.50	3.08	3.97	0.26
30.44	4.51	4.62	5.94	7.55	0.54
61.45	5.07	5.36	8.38	11.22	1.04

pattern seen in Table IV. The pure-admittance and variable-compliance baselines (G2, G3) yield by design, producing the large 190–134 mm contact-window deflections expected of intentional compliance. The predictive variable-impedance baseline (MPVIC) behaves oppositely to the reactive variable-compliance G3: instead of softening, it stiffens predictively to reject the push, cutting contact-window RMS to 5.0 mm, yet it stays a further order of magnitude above the offset-free G5 (0.6 mm) — the same non-offset-free residual seen in Benchmark I. As in Benchmark I, MPVIC here is our own discrete-stiffness scheduler, not a reproduced published algorithm; see the main paper’s Benchmark I discussion for the corresponding caveat.

S7. TIME-VARYING INTERACTION AND HORIZON-PREDICTION VALIDITY

The benchmarks in the main paper apply constant or step forces. Because the framework targets *interaction* dynamics broadly, we additionally exercise a *time-varying* human force and measure the N -step disturbance-prediction RMS ε_N of Section III-D of the main paper — the quantity that bounds how well the flat random-walk prediction holds over the horizon. To reduce configuration-driven variation, the robot holds a *static* target while a sinusoidal push $F_z = -A \sin(2\pi ft)$ of fixed amplitude $A = 12$ N and increasing frequency f is applied, sweeping the disturbance rate $A 2\pi f$, the injected sinusoid’s peak derivative. Because the theorem concerns the aggregate disturbance, the table uses the reconstructed-log rate $L_{d,\text{emp}} = \max_k \|d_{k+1} - d_k\|_2 / \Delta t$. The controller is DI-MPC + Kalman (C5, 100 Hz QP).

Direct ground-truth metric. At each manager instant we compute the simulator acceleration from the applied, torque-limited input and the rigid-body dynamics, then reconstruct

$$d_{\text{acc},k} = \ddot{e}_k + \Lambda^{-1}(q_k)F_{\text{mpc},k}, \quad d_k = -\Lambda(q_k)d_{\text{acc},k}.$$

For the flat prediction made at origin k , the direct metric is $\varepsilon_i = \text{RMS}_k \|d_{k+i} - \hat{d}_{k|i}\|_2$. We also report $e_K = \text{RMS}_k \|d_k - \hat{d}_{k|k}\|_2$. By Minkowski’s inequality, the pointwise rate assumption in the main paper’s horizon-prediction bound gives $\varepsilon_N \leq e_K + L_d N \Delta t$; Table S4 evaluates it with $L_d = L_{d,\text{emp}}$. Both e_K and $L_{d,\text{emp}}$ are estimated from this same logged trajectory, so what follows checks the bound’s internal arithmetic against its own inputs, not an a priori bound validated against unseen data. Origins are restricted to the settled portion of the force window and all N target samples remain inside that window (704 origins per row).

Analysis. The directly measured N -step error stays below the RMS bound in every tested row. In the constant injected-force row, $L_{d,\text{emp}} = 0.51$ N/s captures the small variation of

TABLE S5
HUMAN-FORCE MAGNITUDE SWEEP (SS / PEAK DEFLECTION, MM)

F_z [N]	5	10	15	20	25
D1 Imp. – SS	26.9	33.7	45.0	58.5	73.1
D1 Imp. – peak	28.4	37.0	51.2	70.1	88.9
D7 – SS	0.024	0.023	0.023	0.023	0.023
D7 – peak	0.57	0.96	1.46	1.96	2.45

the other aggregate residual terms, giving a 2.25 N bound versus $\varepsilon_N = 2.20$ N. This does not claim zero estimator error. In that row, the mean error-vector norm is 0.74 N and zero-mean fluctuation RMS is 2.07 N; hence 2.20 N is primarily fluctuation, not steady bias, while closed-loop position RMS remains 0.08 mm. As frequency increases, ε_N rises from 1.13 to 8.38 N while remaining below the corresponding 1.64–11.22 N bounds. Tracking degrades gradually: it remains below 0.6 mm through $L_{d,\text{emp}} = 30.44$ N/s and reaches 1.04 mm at 61.45 N/s. These data directly check that bound for the stated simulator protocol; they do not establish the same bound under unmodelled contact dynamics, sensor delay, or measurement noise. For a *structured* high-rate force (e.g. physiological tremor) the harmonic-internal-model extension of Section III-D would predict that component forward exactly rather than extrapolate it flat. The experiment and its machine-readable output are reproduced by `time_varying_experiment.py` and `time_varying_ground_truth_results.json`.

S8. HUMAN-FORCE MAGNITUDE AND SHAPE SWEEP

Benchmark I and §S7 fix the force magnitude at 12–15 N. Because the offset-free property (Theorem 2 of the main paper) is independent of the force amplitude, we sweep a sustained (step) push $F_z \in \{5, 10, 15, 20, 25\}$ N on the circular tracking task and report the steady-state and peak tip deflection for classical impedance (D1) and the proposed offset-free controller (D7, DI-MPC + Kalman, 500 Hz); a shape sweep at 15 N (step / linear ramp / 1 Hz sinusoid) complements the time-varying study of §S7.

Analysis. Classical impedance deflects in proportion to the force — the $e_\infty = K_d^{-1}F_h$ bias combined with the dynamic tracking error grows from 27 mm at 5 N to 73 mm at 25 N — whereas the proposed controller holds an approximately **0.023 mm steady-state deflection independent of magnitude over the tested 5–25 N unsaturated range**: the integrating disturbance state cancels the sustained force in this range, so accuracy no longer trades against the human’s effort. The first-contact peak grows more substantially ($0.57 \rightarrow 2.45$ mm across 5–25 N), scaling with the force step before $\hat{d}$ converges. Under the three 15 N shapes the proposed controller keeps contact-window RMS at 0.32 mm (step), 0.19 mm (ramp), and 0.87 mm (1 Hz sinusoid) versus 40.9 / 26.0 / 33.0 mm for classical impedance; the sinusoid is the worst case, consistent with §S7 — the flat $\dot{d} = 0$ model lags a fast-varying force, which the harmonic internal model of Section III-D of the main paper would recover. Reproduced by `force_sweep.py`.

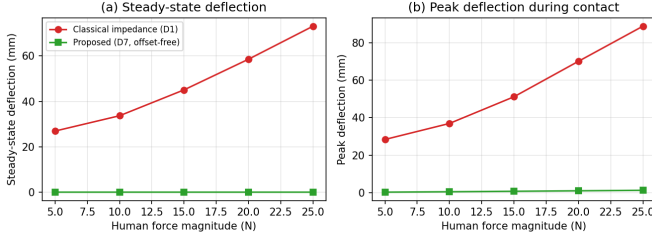


Fig. S2. Human-force magnitude sweep: steady-state (a) and peak (b) tip deflection versus a sustained push, for classical impedance (D1, red) and the proposed offset-free controller (D7, green). The proposed steady-state deflection is invariant to force magnitude (0.023 mm), while classical impedance grows linearly.

S9. CORRECTION-AUTHORITY ROBUSTNESS (IMPEDANCE-BACKBONE ABLATION)

Every controller in the main paper places the entire task-space correction inside one box-constrained decision variable, F_{mpc} : if it is driven toward zero — a tight F_{max} bound, or a horizon step whose predicted torque is unrealizable — the commanded torque degrades to the feedforward term τ_{ff} alone, i.e. zero corrective stiffness. We evaluate an architectural ablation, **C8**, that decouples baseline corrective stiffness from the optimizer: a fixed, positively damped impedance law

$$F_{\text{bb}} = K_{\text{bb}}e + D_{\text{bb}}\dot{e}, \quad K_{\text{bb}} = 300 \text{ N/m},$$

is commanded on every MPC update independent of the QP output ($D_{\text{bb}} = 2\zeta_{\text{bb}}\sqrt{K_{\text{bb}}}$, a nominal unit-effective-mass tuning — $\Lambda^{-1}(q)$ is generally anisotropic, so this is not exact modal-critical damping), and the QP shapes only a bounded additional correction F_{mpc} ($\|F_{\text{mpc}}\|_{\infty} \leq F_{\text{max}}$) predicted through the backbone dynamics linearized at the current configuration, $A_{\text{cl}} = A_d + B_d(\rho_k)G_{\text{bb}}$. If the QP’s output is driven to exactly zero for any reason, the commanded controller retains this non-zero corrective stiffness instead of reverting to bare feedforward. This is QP-independence, not actuator-limit independence: the **total commanded torque** is $\tau = \tau_{\text{base}} + J_v^T(F_{\text{bb}} + F_{\text{mpc}}) - F_{\text{bb}}$ is not optional and must be included in any torque-feasibility check — and C8 additionally applies the main paper’s eq. (9b) row at *every* horizon step rather than only the first, frozen at the current configuration:

$$\begin{aligned} -\tau_{\text{max}} &\leq \tau_{\text{base}}(0) + J_v^T(q_0)(F_{\text{bb}} + F_{\text{mpc},i}) \\ &\leq \tau_{\text{max}}, \quad i = 0, \dots, N-1, \end{aligned}$$

the frozen-Jacobian horizon-wide extension of (9b) — not implied by (9b)/(9c) alone, and specific to C8, not part of the default (C1–C7) formulation. Freezing $J_v(q_0)$, $\tau_{\text{base}}(0)$ across the horizon is a local approximation, not an exact prediction of future torque feasibility. With this in place, the evidence below supports robustness to loss of **additive QP correction authority** specifically, not a blanket guarantee under arbitrary actuator saturation or solver failure.

Scenario and protocol. Identical to Benchmark I: 12 cm circular reference, 15 N step push, 3 cycles / 24 s, contact-window metrics averaged over all three push events. We sweep the corrective-force bound $F_{\text{max}} \in \{150, 20, 5, 1, 0\}$ N, holding every other parameter fixed, emulating progressively severe loss of additive correction authority; $F_{\text{max}} = 0$ N is the limiting case in which the QP contributes nothing.

TABLE S6
CORRECTION-AUTHORITY ABLATION: F_{max} SWEEP, RMS / PEAK (MM)

F_{max} [N]	150	20	5	1	0
C7 – RMS cont.	0.32	0.32	317.9	416.1	430.0
C7 – peak	1.48	1.47	412.4	554.3	565.9
C8 – RMS cont.	0.32	0.32	41.3	69.8	78.5
C8 – peak	1.47	1.47	53.5	95.8	109.3

Results. Under the normal protocol ($F_{\text{max}} = 150$ N), C8 matches C7 to measurement precision: RMS/contact/peak/SS is 12.84/0.32/1.47/0.028 mm versus 12.73/0.32/1.48/0.029 mm. The stress sweep is the relevant comparison:

Analysis. At $F_{\text{max}} \geq 20$ N there is enough headroom that both controllers are unaffected and C8 costs nothing relative to C7 — the backbone’s restoring term is exactly what the unconstrained QP would already have produced. Below that, C7’s contact-window RMS jumps by roughly three orders of magnitude ($0.32 \rightarrow 430$ mm) the moment the corrective force can no longer supply the needed authority: with F_{mpc} forced toward zero, the commanded torque approaches bare feedforward against the sustained push. **C8 degrades more gracefully over the tested 24 s protocol**, reaching 41–79 mm even in the $F_{\text{max}} = 0$ case — a $5.5\text{--}7.7\times$ smaller error than C7 across the curtailed range. This finite-duration result is not a boundedness proof. The impedance-equivalence and offset-free statements of Theorems 1–2 of the main paper are proved for the standard (non-backbone) realization; C8’s additive term retains the same offset-free mechanism, but its formal re-derivation is left to future work. This deployment ablation is distinct from the energy tank, which addresses coupled-system stability rather than QP-authority loss. Reproduced by `stable_backbone_comparison.py --n-cycles 3`.

S10. ACTIVE TORQUE-CONSTRAINT STRESS TEST

The stress test above tightens the *force* box F_{max} ; every benchmark elsewhere in this paper keeps τ_{max} at its full FR3 value, where the applied-torque row (eq. (9b) of the main paper) never actually saturates (raw excess $< 2 \times 10^{-5}$ Nm, Table V discussion). This section tightens τ_{max} directly via a multiplicative scale s and asks what the torque row costs and buys once it can genuinely bind, comparing four otherwise-identical 100 Hz controllers on the Benchmark I protocol:

- **C5** — the row embedded as in the main paper: on infeasibility, the released implementation returns zero correction rather than claiming recursive feasibility (§III-B).
- **Unconstrained** — the row omitted entirely; the plant still clips physically (`FR3MuJoCoEnv.apply_torque`), so this isolates whether the QP’s own optimum accounts for τ_{max} , not whether the robot ever exceeds it.
- **Observer** — the fixed-gain baseline of §VI under the same tightened budget, using the same torque row as C5 but a single-step, non-predictive QP.
- **Soft** — the same row relaxed with a slack variable $s \geq 0$: $-\tau_{\text{max}} - \text{tb} - s \leq \tau_{\text{base}} + J_v^T F_{\text{mpc},0} \leq \tau_{\text{max}} - \text{tb} + s$, penalized $\frac{1}{2}\rho\|s\|^2$ in the QP cost instead of the hard zero-correction

TABLE S7
TORQUE-BUDGET SWEEP: CONTACT RMS [MM] / QP FAILURES [%]

$\tau_{\max}$ scale	1.0	0.32
C5	0.53 / 0%	550.5 / 72.5%
Unconstrained	0.53 / 0%	0.53 / 0%
Observer	0.52 / 0%	0.51 / 0%
Soft	0.53 / 0%	0.52 / 0%

fallback, so the QP is always feasible. Implemented as an extended decision variable $[U; s] \in \mathbb{R}^{37}$ (one slack per joint row) added to the same QP (not a separate solve); $\rho = 1$, selected by a small sweep — the code’s own monkeypatchable default is $\rho = 10^4$, used only when this override is unset, so any independent reproduction must set it explicitly.

A third, more severe scale (0.2) was excluded from this table: there, Soft’s own slack diverges to non-physical magnitudes (max 122,122 Nm, RMS 3239 Nm, active on 100% of solves) alongside severe tracking loss (303.6 mm) — not graceful degradation, so not an informative comparison point.

Analysis. At the paper’s operating point (scale 1.0) all four are indistinguishable, confirming the torque row costs nothing when it never binds; Soft itself draws on at most 0.35 Nm of slack here, active on 0.3% of solves. Tightening the budget separates them. At scale 0.32, C5’s QP is infeasible on 72.5% of solves — 1740 of those 1741 solves reported by the solver as genuinely primal infeasible, not a numerical or iteration-limit artifact — and the zero-correction fallback degrades tracking to 550 mm, worse than every alternative. Unconstrained is essentially untouched, since the plant’s physical clip alone recovers a usable command, at the cost of that clip itself: its raw command exceeds the robot’s actual hardware limit by up to 5.2 Nm on 0.05% of samples, at every scale, since it never consults $\tau_{\max}$ at all. Soft recovers essentially all of the lost performance (0.52 mm, matching Unconstrained) by drawing on genuinely nonzero slack: up to 10.55 Nm, RMS 0.65 Nm, active on 42% of solves — Soft does exceed the tightened test row it relaxes, so its raw command is not held within that synthetic budget. What it respects instead is the robot’s actual, full-scale hardware limit: Soft never triggers the plant’s physical clip at this scale (0% clipped samples). This is the constraint’s positive case, stated precisely: relaxing the same row that degrades sharply under a hard bound trades a bounded, quantified overshoot of the synthetic test budget for a solution that, unlike Unconstrained’s, never needs the plant’s clip to stay within the robot’s real limit, while matching Unconstrained’s tracking and avoiding the hard row’s all-or-nothing failure. Extending this behavior to the excluded, more severe scale with a single fixed ρ is left to an adaptive or scale-aware weighting, a natural next step. Reproduced by `torque_constraint_active_experiment.py` and `soft_constraint_diagnostic.py` (slack/excess instrumentation).

S11. LOW-STIFFNESS TRANSIENT COMPLIANCE AND RECOVERY

Every comparison elsewhere in this paper realizes a high closed-loop stiffness (5441 N/m calibrated per Table V, or

TABLE S8
LOW-STIFFNESS (100 N/M) YIELD-THEN-RECOVER

Controller	Peak [mm]	Settle<2 mm [s]	SS [mm]	Peak power [W]
No estimator	114.2	never	113.2	5.7
With estimator	12.9	2.67	1.16	11.0

C4/C5’s own Riccati-image gain), so peak deflection under the 15 N push is only a few mm — closer to a stiff trajectory tracker with a disturbance observer than to a controller that visibly yields to contact and then recovers. This section tests the architecture’s other end of the design space: a deliberately low prescribed stiffness $K_d = 100$ N/m (matching C2’s admittance virtual-spring stiffness), realized through a cost-shaped QP variant that directly penalizes deviation of the force sequence from the prescribed law’s own rollout ($H = \bar{R}$, $h = -\bar{R}U_{\text{imp}}$ in the main paper’s condensed-QP notation): unlike Theorem 1’s general Riccati image, which reports whatever gain the LQ cost happens to realize, this shaping makes the unconstrained minimizer exactly $F_{\text{mpc}} = K_d e + D_d \dot{e} - \hat{d}$ for any chosen K_d, D_d , with and without the $-\hat{d}$ term. $D_d = 2\zeta\sqrt{K_d}$ assumes a unit effective mass; $\Lambda^{-1}(q)$ is generally anisotropic (the same caveat already noted for the C8 backbone’s D_{bb} above), so $\zeta = 1$ is only nominal critical damping and produced a visibly underdamped, oscillating response at this low K_d when traced directly (raw error vs. time, not just the summary RMS); a small sweep selects $\zeta = 3$ for clean, non-oscillatory settling.

Without the estimator, the response approaches (not fully, since the reference moves along the circle while the push is one-directional and K_d acts on all three axes) the static equilibrium bias $F_h/K_d \approx 150$ mm and never drops below the 2 mm settling tolerance: a permanent offset, as expected of any finite-stiffness law. With the estimator, the same prescribed stiffness visibly yields to contact — a genuine 12.9 mm transient, an order of magnitude more compliant than C4/C5’s few-mm response at their calibrated stiffness — and then recovers to 1.16 mm within 2.67 s: transient compliance followed by offset-free recovery, not only disturbance rejection around a stiff equilibrium. Peak positive joint power stays low in both cases (5.7 and 11.0 W) since the prescribed stiffness itself is low. Reproduced by `low_stiffness_reference_holding.py`.

REFERENCES

- [1] N. Hogan, “Impedance control: An approach to manipulation—Parts I–III,” *ASME J. Dyn. Syst. Meas. Control*, vol. 107, no. 1, pp. 1–24, 1985.
- [2] S. Chiaverini, B. Siciliano, and L. Villani, “A survey of robot interaction control schemes with experimental comparison,” *IEEE/ASME Trans. Mechatronics*, vol. 4, no. 3, pp. 273–285, 1999.
- [3] Y.-Y. Cao, Z. Lin, and D. G. Ward, “Anti-windup design of output tracking systems subject to actuator saturation and constant disturbances,” *Automatica*, vol. 40, no. 7, pp. 1221–1228, Jul. 2004.
- [4] —, “An antiwindup approach to enlarging domain of attraction for linear systems subject to actuator saturation,” *IEEE Trans. Autom. Control*, vol. 47, no. 1, pp. 140–145, Jan. 2002.
- [5] T. Gold, A. Völz, and K. Graichen, “Model predictive interaction control for robotic manipulation tasks,” *IEEE Trans. Robot.*, vol. 39, no. 1, pp. 76–89, 2023.
- [6] Y. Chen, C. Li, T. Teng, X. Wu, D. Xu, Y.-H. Liu, and F. Chen, “Unified model predictive interaction control integrating impedance matching and constraint optimization,” in *Proc. IEEE Int. Conf. Control Autom. (ICCA)*, 2025, pp. 372–378.

- [7] K. Haninger, C. Hegeler, and L. Peternel, "Model predictive impedance control with Gaussian processes for human and environment interaction," *Robotics and Autonomous Systems*, vol. 165, p. 104431, 2023.
- [8] R. Cao, L. Cheng, and H. Li, "Passive model-predictive impedance control for safe physical human-robot interaction," *IEEE Trans. Cogn. Dev. Syst.*, vol. 16, no. 2, pp. 426–435, 2024.
- [9] A. Jordana, S. Kleff, J. Carpentier, N. Mansard, and L. Righetti, "Force feedback model-predictive control via online estimation," in *Proc. IEEE ICRA*, 2024, pp. 11 503–11 509.
- [10] S. Kleff, A. Meduri, R. Budhiraja, N. Mansard, and L. Righetti, "High-frequency nonlinear model predictive control of a manipulator," in *Proc. IEEE ICRA*, 2021.
- [11] J. Matschek, J. Bethge, and R. Findeisen, "Safe machine-learning-supported model predictive force and motion control in robotics," *IEEE Trans. Control Syst. Technol.*, vol. 31, no. 6, pp. 2380–2392, 2023.
- [12] J. Xue, W. Liang, Y. Wu, and T. H. Lee, "Model predictive variable impedance control towards safe robotic interaction in unknown disturbance-rich environments," *Robotics and Autonomous Systems*, vol. 189, p. 104961, 2025.
- [13] G. Wang, Z. Lin, F. Min, D. Li, and N. Liu, "Ensuring safe physical HRI: Integrated MPC and ADRC for interaction control," *Actuators*, vol. 14, no. 12, p. 608, 2025.
- [14] Franka Robotics GmbH, "Franka research 3 (FR3) technical documentation," 2023, <https://frankaemika.github.io/docs>.
- [15] B. Siciliano, L. Sciacivico, L. Villani, and G. Oriolo, *Robotics: Modelling, Planning and Control*. Springer, 2009.
- [16] O. Khatib, "A unified approach for motion and force control of robot manipulators: The operational space formulation," *IEEE J. Robot. Autom.*, vol. 3, no. 1, pp. 43–53, 1987.
- [17] L. Sentis and O. Khatib, "Synthesis of whole-body behaviors through hierarchical control of behavioral primitives," *Int. J. Humanoid Robotics*, vol. 2, no. 4, pp. 505–518, 2005.
- [18] A. Albu-Schäffer, C. Ott, and G. Hirzinger, "A unified passivity-based control framework for position, torque and impedance control of flexible joint robots," *Int. J. Robot. Res.*, vol. 26, no. 1, pp. 23–39, 2007.
- [19] H. Sadeghian, L. Villani, M. Keshmiri, and B. Siciliano, "Task-space control of robot manipulators with null-space compliance," *IEEE Trans. Robot.*, vol. 30, no. 2, pp. 493–506, 2014.
- [20] B. Stellato, G. Banjac, P. Goulart, A. Bemporad, and S. Boyd, "OSQP: An operator splitting solver for quadratic programs," *Math. Program. Comput.*, vol. 12, no. 4, pp. 637–672, 2020.
- [21] Google DeepMind, "MuJoCo menagerie: A collection of physics-based simulation models," GitHub, 2022, https://github.com/google-deepmind/mujoco_menagerie.
- [22] E. Todorov, T. Erez, and Y. Tassa, "MuJoCo: A physics engine for model-based control," in *Proc. IEEE/RSJ IROS*, 2012, pp. 5026–5033.
- [23] L. Roveda, N. Iannacci, F. Vicentini, N. Pedrocchi, F. Braghin, and L. M. Tosatti, "Optimal impedance via model predictive control for robot-aided rehabilitation," *Control Eng. Practice*, vol. 83, pp. 11–23, 2019.
- [24] Y. Cao, "Interaction dynamics: A physical-interaction reasoning layer for humanoid robots," 2026, manuscript under review.
- [25] —, "Reactive time-domain motion planning via a configuration-independent double-integrator backbone," 2026, manuscript under review.
- [26] —, "Interaction dynamics for dexterous manipulation," 2026, manuscript under review.
- [27] —, "Interaction dynamics modeling and predictive control for safe steerable catheter-tissue interaction," 2026, manuscript under review.