

Contact-Consistent Interaction Dynamics Normalization for Predictive Physical Human–Robot Interaction

Yongyan Cao

Abstract—Safe physical human–robot interaction on floating-base robots requires interaction regulation under changing contact constraints. We develop a contact-consistent normalization in which the residual end-effector channel is represented as a linear double integrator in acceleration coordinates. Both discrete prediction matrices are independent of configuration and support mode; posture and contact enter only through task-inertia force recovery and constraints. The controller combines a constant-Hessian receding-horizon QP, an acceleration-disturbance observer, and a priority-consistent realization. Classical operational-space impedance is shown to be the unconstrained infinite-horizon limit. MuJoCo experiments on a 17-DOF biped and a Menagerie-derived Unitree G1 model evaluate sustained forces, transmitted shocks, and scheduled contact-model changes. The observer sustains near-offset-free tracking across a genuine contact-set switch and a scheduled support-mode transition, while disturbance estimation—not contact consistency alone—is the dominant source of fixed-stance accuracy; covariance inflation gives only scenario-dependent transient benefit. Dynamic walking and hardware validation remain outside the present evidence.

Index Terms—Interaction dynamics, whole-body control, model predictive control, impedance control, floating-base robots, physical human–robot interaction, contact-consistent dynamics, legged manipulation.

I. INTRODUCTION

Legged and floating-base robots must increasingly do more than locomote: they must physically interact with people and their surroundings while keeping balance. Safe interaction on such platforms is fundamentally a problem of *interaction dynamics*—the closed-loop relation between the arm end-effector force and motion—coupled, through the contact constraints, to the whole-body balance task. These objectives are tightly coupled—arm motions shift the center of mass (CoM), changing contact force distribution, while ground reactions propagate back through the body and appear as disturbances at the end-effector. Classical fixed-base impedance control [1] and its MPC extensions [2], [3] cannot address this coupling because they assume the robot base is rigidly anchored.

The dominant paradigm for whole-body control of legged systems decouples the problem into two layers: a centroidal MPC that optimizes ground reaction forces (GRFs) using a linearized single rigid-body dynamics (SRBD) model [4], [5], and an inner WBC layer that resolves these forces into joint torques via a prioritized QP [6], [7]. This architecture achieves remarkable locomotive agility—the MIT Cheetah

3 [4] executes high-speed bounding and stair climbing—but allocates 100% of the robot’s control authority to locomotion and base-posture maintenance. Any external arm interaction is treated as a disturbance to be suppressed, not as a channel to be actively regulated. A biped reaching to assist a human standing beside it, or a quadruped manipulating a valve while maintaining stance, cannot be handled by these frameworks with the compliance and zero-steady-state-error guarantees required for safe pHRI.

Conversely, impedance MPC methods designed for fixed-base manipulators [2], [3], [8], [9] lack an unactuated base state, generalized-coordinate partitioning, or contact-consistent mass inverses. They assume an infinite-mass ground connection and cannot model the propagation of foot contact forces to end-effector apparent inertia. Deploying them directly on a floating-base platform produces steady-state torque errors and potential instability during contact transitions.

The technical gap is therefore not merely the absence of another whole-body controller. It is the absence of a representation in which interaction dynamics remain structurally the same as robot posture, contact mode, and apparent inertia change. This paper closes that gap through a simple sequence: interaction dynamics are first normalized through contact consistency, the normalized dynamics become a linear double integrator, predictive regulation is applied to that linear interaction model, and classical impedance appears as the infinite-horizon limiting case. The main contributions are:

Interaction-dynamics normalization. We formulate floating-base arm pHRI as an interaction-dynamics problem and derive the contact-consistent residual plant obtained after higher-priority balance and contact tasks are removed through the whole-body null space.

Configuration-invariant predictor. We prove that the normalized end-effector interaction dynamics reduce to an exact linear double integrator with constant discrete state matrix A_d and input matrix B_d . Contact configuration and posture affect force recovery and constraint rows through Λ_{arm} , not the predictor.

Predictive interaction control and impedance equivalence. We regulate the normalized dynamics with a finite-horizon QP and show that classical operational-space impedance is recovered as the infinite-horizon, zero-input limit. Thus impedance behavior is a special case of predictive interaction dynamics rather than a separate controller family.

Floating-base realization and theory validation. We realize the predictor inside a priority-consistent WBC stack us-

ing contact-dependent force recovery, a disturbance observer, and optional covariance inflation. Simulations evaluate fixed stance, force shocks, and scheduled contact-model changes.

The remainder of this paper is organized as follows. Section II surveys related work. Section III formulates interaction dynamics on floating-base robots. Section IV derives the contact-consistent normalization. Section V presents predictive regulation of the normalized dynamics. Section VI treats contact-mode changes. Section VII proves the impedance-equivalence result. Section VIII analyzes stability. Section IX gives the whole-body realization and compares the framework with prior work. Section X reports theory-validation simulations. Section XI concludes.

II. RELATED WORK

The dominant approach to predictive whole-body control projects the robot’s dynamics onto its centroidal frame. Di Carlo et al. [4] introduced the convex SRBD formulation for MIT Cheetah 3, linearizing the rotation dynamics about a nominal pitch-roll and treating each support foot as a rigid contact. The resulting time-varying linear system admits a QP solution at 40 Hz for the outer MPC, while an inner Whole-Body Impulse Control (WBIC) layer maps GRFs to joint torques at 500 Hz. This bi-level architecture is foundational to the present work; however, Kim et al. [5] dedicate both layers entirely to locomotion—external arm forces are filtered out through centroidal inertia assumptions and rigid GRF assignment, and no mechanism exists for compliant manipulation.

Bellicoso et al. [6] proposed a hierarchical WBC scheme for the ANYmal quadruped that solves a cascaded sequence of QPs to track base and end-effector tasks simultaneously. While effective for continuous trotting and terrain adaptation, the WBC stack uses classical PD task objectives with instantaneous feedback ($N=1$); there is no receding-horizon mechanism to predict and pre-load corrective torque before a disturbance develops. Sustained contact forces produce the steady-state error quantified in (16) below. Baseline D4 in Section X instantiates exactly this architecture—a priority-consistent WBC with null-space PD and no prediction—on the present platform, so Tables III–V report a same-hierarchy, no-prediction data point alongside the proposed controller rather than only a qualitative contrast. The same group later extended this cascaded-QP stack to explicit loco-manipulation with ALMA [10], adding a dedicated end-effector task to the ANYmal WBC for door-opening and object-handling demonstrations. The arm task objective there remains instantaneous PD within the same $N=1$ hierarchy, so the steady-state limitation of D4 is not specific to the 2016 terrain-adaptation instance but persists once an explicit manipulation task is added to this control family—the precise gap the present predictive formulation targets.

Koolen et al. [7] implemented a momentum-based controller for Atlas that regulates centroidal momentum via a QP distributing contact forces. The formulation shares the centroidal perspective but does not include a predictive loop for arm impedance and relies on high-gain stiffness to suppress interaction errors.

Sleiman et al. [11] proposed a unified MPC framework for whole-body dynamic locomotion and manipulation on legged robots, simultaneously optimizing body posture, gait timing, and arm end-effector trajectories over a receding horizon. This represents the state of the art for integrated loco-manipulation and is the closest prior work to the present architecture. The key structural difference is that the arm task in [11] is formulated as a fixed-base QP subproblem: the task-space inertia uses M^{-1} rather than the contact-consistent $\bar{M}^{-1}$, and no integrating disturbance state is included to guarantee zero steady-state pHRI error under sustained contact.

Winkler et al. [12] developed TOWR, a phase-based trajectory optimizer that simultaneously synthesizes gait sequences, foothold locations, and full-body motions over multi-second horizons using a nonlinear program solved by interior-point methods. The full rigid-body model captures leg-inertia coupling that SRBD ignores, but restricts operation to ~ 20 – 50 Hz and offline planning. Real-time pHRI management at 1 kHz is outside the scope of this approach.

Grandia et al. [13] extended TOWR with a real-time model-predictive framework using sequential convex approximations, achieving 20 Hz replanning for rough terrain. While this improves responsiveness compared to pure offline planning, it still lacks the integrating disturbance estimation required for zero steady-state error under sustained contact.

Force control for robotic manipulators—encompassing impedance, admittance, and hybrid position/force strategies—is surveyed comprehensively in [14]. The foundational impedance control law of Hogan [1] was unified with position and torque control into a passivity-preserving framework by Albu-Schäffer, Ott, and Hirzinger [15], providing the theoretical basis on which predictive extensions build.

The present paper is a direct structural extension of a line of prior work on saturated and predictive control. Anti-windup designs for output tracking under actuator saturation and constant disturbances [16], and the associated domain-of-attraction analysis [17], established that an integrating disturbance channel achieves zero steady-state tracking error for fixed-base saturated linear systems—the foundational insight carried forward here to the floating-base, contact-switching setting via the Kalman augmented state. The min-max MPC formulation for LPV systems [18] introduced parameter-varying input matrices with input constraints, the direct precursor to parameter-varying constraint handling in the present work. Building on these fixed-base results, Cao, Cheng, and Li [2] introduced a passive MPC framework for pHRI on fixed-base manipulators in which the outer MPC optimizes impedance parameters $\{M_d, D_d\}$ over a receding horizon; passivity is enforced via a virtual energy tank. Because impedance parameters enter nonlinearly into the prediction matrices, iterative solvers are required and update rates are limited to 10–30 Hz. The two-layer Impedance MPC for pHRI [3] resolved this rate limitation on fixed-base manipulators: an analytical feedforward cancels gravity, Coriolis, and task-space inertia, reducing the residual plant to a double integrator with a *constant* state-transition matrix, while the MPC decision variables become corrective forces F_{mpc} and a Kalman-augmented disturbance state provides a formal zero-steady-state-error

guarantee—sub-0.05 mm under a sustained 15 N force on a 7-DOF manipulator, versus 44.8 mm for classical impedance control. That framework is the direct base of the present paper, which extends it from fixed-base manipulators to floating-base humanoids: the constant- A_d structure is preserved by substituting the contact-consistent mass inverse $\bar{M}^{-1}$ into the feedforward linearization, the Kalman state additionally absorbs leg-momentum variations and SRBD approximation errors, and the constraint-update structure of [18] handles changing force recovery while preserving the constant lifted predictor.

Haninger, Hegeler, and Peternel [8] optimize force references and impedance parameters jointly using stochastic MPC with Gaussian Process models of task forces. This provides complementary insights into uncertainty-aware impedance shaping but does not address floating-base dynamics, under-actuation, or contact-consistent operational-space formulation.

Khatib [19] formulated the operational space control framework, establishing task-space inertia, Coriolis compensation, and dynamically-consistent pseudoinverses as the mathematical foundation for task-level manipulation. Sentis and Khatib [20] extended this to hierarchical synthesis of whole-body behaviors, proving that priority-ordered null-space projection guarantees non-interference between tasks—the SK05 law that forms the backbone of Level 2 in the present architecture. Righetti et al. [21] unified the floating-base inverse dynamics perspective with external contact constraints, showing how $\bar{M}^{-1}$ arises naturally from an orthogonal decomposition of the constrained dynamics. The present work builds on [19]–[21] by embedding a predictive MPC layer in the residual null space of the floating-base contact-consistent hierarchy.

III. INTERACTION DYNAMICS ON FLOATING-BASE ROBOTS

A floating-base robot (humanoid, quadruped) has n actuated joints and a 6-DOF unactuated base [21]. The generalized coordinates are:

$$q = \begin{bmatrix} q_b \\ q_j \end{bmatrix} \in \mathbb{R}^{n+6}, \quad q_b \in SE(3), \quad q_j \in \mathbb{R}^n \quad (1)$$

where $q_b = (p_b, R_b)$ is the base position and orientation and q_j are the n joint angles. The velocity vector is:

$$\dot{q} = \begin{bmatrix} v_b \\ \dot{q}_j \end{bmatrix} \in \mathbb{R}^{n+6}, \quad v_b = \begin{bmatrix} \dot{p}_b \\ \omega_b \end{bmatrix} \quad (2)$$

The floating-base equations of motion [21] are:

$$M(q)\ddot{q} + C(q, \dot{q})\dot{q} + G(q) = S^\top \tau + J_c^\top(q)\lambda \quad (3)$$

where $M(q) \in \mathbb{R}^{(n+6) \times (n+6)}$ is the positive-definite inertia matrix; $h = C(q, \dot{q})\dot{q} + G(q) \in \mathbb{R}^{n+6}$ collects Coriolis, centrifugal, and gravity terms; $S = [0_{n \times 6}, I_n]$ is the selection matrix (the base has no direct actuation); $\tau \in \mathbb{R}^n$ are commanded joint torques; $J_c(q) \in \mathbb{R}^{n_c \times (n+6)}$ is the contact Jacobian; and $\lambda \in \mathbb{R}^{n_c}$ are ground reaction forces (GRFs).

Partitioning (3) into base and joint blocks:

$$\begin{bmatrix} M_b & M_{bj} \\ M_{bj}^\top & M_j \end{bmatrix} \begin{bmatrix} \ddot{q}_b \\ \ddot{q}_j \end{bmatrix} + \begin{bmatrix} h_b \\ h_j \end{bmatrix} = \begin{bmatrix} 0 \\ \tau \end{bmatrix} + \begin{bmatrix} J_{c,b}^\top \\ J_{c,j}^\top \end{bmatrix} \lambda \quad (4)$$

A rigid contact at point i enforces zero contact-point velocity: $J_{c,i}(q)\dot{q} = 0$ [21]. Differentiating yields the acceleration-level constraint:

$$J_{c,i}\ddot{q} = -\dot{J}_{c,i}\dot{q} \quad (5)$$

Stacking all contacts and combining with (3):

$$\begin{bmatrix} M & -J_c^\top \\ J_c & 0 \end{bmatrix} \begin{bmatrix} \ddot{q} \\ \lambda \end{bmatrix} = \begin{bmatrix} S^\top \tau - h \\ \gamma_c \end{bmatrix}, \quad \gamma_c \triangleq -\dot{J}_c \dot{q} \quad (6)$$

Solving for the GRFs:

$$\lambda = \Lambda_c(q)(-\dot{J}_c \dot{q} - J_c M^{-1}(S^\top \tau - h)) \quad (7)$$

where $\Lambda_c = (J_c M^{-1} J_c^\top)^{-1}$ is the contact-space inertia.

Define the contact-space inertia and the corresponding constrained inverse [19], [21]:

$$\Lambda_c = (J_c M^{-1} J_c^\top)^{-1} \quad (8)$$

$$\bar{M}^{-1} = M^{-1} - M^{-1} J_c^\top \Lambda_c J_c M^{-1} \quad (9)$$

$\bar{M}^{-1}$ replaces M^{-1} in all operational-space formulas when contacts are active. Equation (9) is the Schur-complement inverse of the constrained dynamics and is symmetric positive semidefinite on the admissible acceleration subspace when $M \succ 0$ and J_c has full row rank. The associated contact-consistent projector may be written in left/right forms depending on the metric, but (9) is the definition used in the task inertia $\Lambda_i = (J_i \bar{M}^{-1} J_i^\top)^{-1}$. The simulations regularize the contact-space inverse as $(J_c M^{-1} J_c^\top + 0.1I)^{-1}$ and eigenvalue-clamp the task mobility. This prevents numerical singularity in the point-contact model but makes contact decoupling approximate; exact projector identities apply only in the zero-regularization limit. The approximation is not marginal, and the regularization is not optional. At the double-support stance of Scenarios A–C, the contact null-space projector P_c is an exact oblique projector only as the regularization vanishes, where $\|P_c\|_2 = 28.0$; at the 0.1 actually used, $\|P_c\|_2 = 12.6$ but $\|P_c - P_c^2\| = 6.8$ and the six contact-direction eigenvalues have drifted from 0 to 0.65. The large operator norm at low regularization is what forces this choice: because P_c is oblique rather than orthogonal, being a projector does not bound its gain, and below $\approx 3 \times 10^{-3}$ the amplified feedforward destabilizes the closed loop outright. The reported results therefore demonstrate predictive interaction regulation running *above* a contact-consistent projection, not validated contact non-interference; establishing the latter needs a torque-level constrained inverse-dynamics realization with explicit contact, friction, and priority residuals, which we do not claim here.

The centroidal momentum $h_G = [k^\top, L^\top]^\top = A(q)\dot{q} \in \mathbb{R}^6$ aggregates the robot's linear and angular momentum about its CoM [22]. Differentiating:

$$\begin{aligned} \dot{h}_G &= G_c(q)\lambda + \begin{bmatrix} mg \\ 0 \end{bmatrix}, \\ G_c &= \begin{bmatrix} I_3 & I_3 & \cdots \\ (p_1 - p_G)^\times & (p_2 - p_G)^\times & \cdots \end{bmatrix}. \end{aligned} \quad (10)$$

For the outer MPC, (10) is approximated by the **SRBD** model [4], treating the robot as a lumped mass m with constant inertia I_G . Linearizing about a nominal orientation yields:

$$\dot{x}_c = A_c x_c + B_c(\{p_i\})u_c \quad (11)$$

where $x_c \in \mathbb{R}^{12}$ is the centroidal state and u_c collects contact forces. The SRBD approximation error is $O(m_{\text{leg}}/m_{\text{total}})^2$, acceptable for robots where leg mass is below 20–30% of total mass.

IV. CONTACT-CONSISTENT INTERACTION DYNAMICS

For a task variable $x_i = \phi_i(q) \in \mathbb{R}^{m_i}$ with Jacobian $J_i = \partial\phi_i/\partial q$, substituting (3) into the task-space acceleration yields the contact-consistent task-space dynamics [19], [21]:

$$\Lambda_i(q)\ddot{x}_i + \mu_i = F_i \quad (12)$$

where $\Lambda_i = (J_i \bar{M}^{-1} J_i^\top)^{-1}$ is the task-space inertia; $\mu_i = \bar{J}_i^\top h - \Lambda_i \bar{J}_i \dot{q}$ collects projected Coriolis, centrifugal, and gravity terms; $\bar{J}_i = \bar{M}^{-1} J_i^\top \Lambda_i$ is the dynamically-consistent pseudoinverse; and F_i is the commanded operational-space force.

For k tasks in priority order (Task 1 = highest), the Senti–Khatib law [20] synthesizes a *generalized* task force $f_{\text{task}} \in \mathbb{R}^{n+6}$:

$$f_{\text{task}} = J_1^\top F_1 + \bar{N}_1^\top J_2^\top F_2 + \bar{N}_{12}^\top J_3^\top F_3 + \cdots + \bar{N}_{1\dots k}^\top f_{\text{null}} \quad (13)$$

where $\bar{N}_{1\dots i} = \prod_{j=1}^i (I - \bar{J}_j J_j) \in \mathbb{R}^{(n+6) \times (n+6)}$ is the accumulated contact-consistent null-space projector. Every term in (13) lives in the generalized-force space $\mathbb{R}^{n+6}$, since $J_i \in \mathbb{R}^{m_i \times (n+6)}$ is taken with respect to the full generalized coordinates. Because the floating base is unactuated, f_{task} is not itself realizable; the commanded joint torque is its actuated projection

$$\tau = S f_{\text{task}} \in \mathbb{R}^n, \quad (14)$$

and the six unactuated base rows $(I - S^\top S)f_{\text{task}}$ must be borne by the contact reactions $J_c^\top \lambda$ of (3). Enforcing that those rows are consistent with an admissible λ is precisely the role of the contact-consistent projection: in the exact, zero-regularization limit the projected task force induces no contact-constraint violation, so (14) discards nothing that the contacts cannot supply. Under the finite regularization actually used, this holds only approximately (Section III). Under an exact model, dynamically consistent projectors, inactive actuator saturation, and no change in the active contact/friction inequalities, the key property $J_j \bar{N}_{1\dots i} = 0$ for all $j \leq i$ gives zero acceleration at all higher-priority task coordinates. Thus the arm predictive interaction layer is designed to be non-interfering with contact maintenance and balance in the ideal hierarchy; in implementation, saturation and contact active-set changes are handled by conservative force limits and by the contact-mode update protocol.

Each task force F_i in (13) is typically a PD law:

$$F_i = \Lambda_i(\ddot{x}_{di} + K_{D,i}\dot{e}_i + K_{P,i}e_i) + \mu_i \quad (15)$$

Under a persistent disturbance force F_h :

$$e_{\infty,i} = K_{P,i}^{-1} \Lambda_i^{-1} F_h = K_{x,i}^{-1} F_h \neq 0, \quad K_{x,i} \triangleq \Lambda_i K_{P,i}. \quad (16)$$

Here $K_{P,i}$ is the acceleration-level proportional gain in (15), while $K_{x,i}$ is the equivalent Cartesian stiffness in N/m. The simulation baselines report K_x directly; therefore the D1 theoretical offset under an 8 N force and $K_x = 800$ N/m

is $8/800 = 10$ mm. This residual steady-state error is the fundamental limitation of the SK05 PD law and the primary motivation for regulating the arm task through predictive interaction dynamics.

V. PREDICTIVE REGULATION OF INTERACTION DYNAMICS

The control objectives are:

- 1) maintain balance with contact forces inside friction cones;
- 2) track an arm end-effector reference $p_d(t)$;
- 3) reject pHRI forces with zero steady-state tracking error.

These objectives are addressed by three nested control levels:

Level 1 (Centroidal MPC, 40–100 Hz): plans CoM trajectory and GRFs over a 500 ms horizon via the SRBD model (11).

Level 2 (WBC Hierarchy, 500 Hz): resolves the Level 1 GRFs into joint torques using the SK05 law (13) for contact and balance tasks, leaving the arm end-effector task slot open.

Level 3 (predictive interaction regulation, ≥ 1 kHz): fills the arm slot with a receding-horizon QP that predicts and rejects pHRI disturbances, replacing the PD law (15) with a predictive force command.

After Level 2 commits torques for contact maintenance and balance, the residual arm end-effector dynamics are:

$$\Lambda_{\text{arm}}(q)\ddot{x}_{\text{arm}} + \mu_{\text{arm}} = F_{\text{arm}} + d_{\text{ext}} \quad (17)$$

where $\Lambda_{\text{arm}} = (J_{\text{arm}} \bar{M}^{-1} J_{\text{arm}}^\top)^{-1}$ uses the contact-consistent mass inverse (9), $\mu_{\text{arm}} = \bar{J}_{\text{arm}}^\top h - \Lambda_{\text{arm}} \bar{J}_{\text{arm}} \dot{q}$, and d_{ext} is the pHRI wrench projected to arm task space.

We optimize residual Cartesian acceleration u and recover physical force:

$$F_{\text{arm}} = \Lambda_{\text{arm}}(q)(\ddot{p}_d + u) + \mu_{\text{arm}} \quad (18a)$$

$$\tau_{\text{arm}} = S \bar{N}_{12}^\top J_{\text{arm}}^\top F_{\text{arm}} \quad (18b)$$

Level 2 updates $\bar{N}_{12}(q)$, $\Lambda_{\text{arm}}(q)$, and μ_{arm} at 500 Hz. Level 3 runs at ≥ 1 kHz; on interleaved cycles the projector and feedforward terms are held at their most recent Level 2 values. The configuration changes by at most $\|\dot{q}\| \Delta t_2 \approx 0.002$ rad per Level 2 interval, so the frozen-matrix error is first-order small.

Substituting the feedforward (18a) into the residual plant (17) cancels the $\Lambda_{\text{arm}} \ddot{p}_d + \mu_{\text{arm}}$ terms, and with the error convention $e_{\text{arm}} = x_{\text{arm}} - p_d$ (actual minus desired) and $d(t) \triangleq \Lambda_{\text{arm}}^{-1} d_{\text{ext}}$ the residual tracking error dynamics reduce to the normalized model

$$\ddot{e}_{\text{arm}} = u + d(t). \quad (19)$$

Proposition 1 (Constant Normalized Predictor). *The exact ZOH model for $x_{e,k} = [e_{\text{arm}}^\top, \dot{e}_{\text{arm}}^\top]^\top$ is*

$$A_d = \begin{bmatrix} I_3 & \Delta t I_3 \\ 0 & I_3 \end{bmatrix}, \quad B_d = \begin{bmatrix} \frac{1}{2} \Delta t^2 I_3 \\ \Delta t I_3 \end{bmatrix}, \quad (20)$$

independent of configuration and contact mode.

Proof. The continuous residual error dynamics (19) have state matrix $A_c = \begin{bmatrix} 0 & I_3 \\ I_3 & 0 \end{bmatrix}$ satisfies $A_c^2 = 0$, hence $A_d = I + A_c \Delta t$. Integrating $e^{A_c s} [0; I_3]$ gives the stated B_d . $\square$

Both matrices are constant, so the lifted rollout, Hessian, and unconstrained factorization are computed once. Configuration dependence remains only in the force recovery and constraints.

Let $U = [u_0^\top, \dots, u_{N-1}^\top]^\top$ and let Γ be the constant lifted matrix constructed from (20). The receding-horizon QP is:

$$\min_U \frac{1}{2} U^\top H U + h_k^\top U \quad \text{s.t.} \quad \|F_{\text{ff},k} + \Lambda_{\text{arm}}^{(m)}(q_k) u_k\|_\infty \leq F_{\text{max}} \quad (21)$$

where $H = \Gamma^\top \bar{Q} \Gamma + \bar{R}$ is constant. Direct-torque biped scenarios additionally impose a horizon-wide, frozen local actuator row:

$$\tau_{\min} \leq \tau_{\text{offset},k} + T_{\tau,k} u_i \leq \tau_{\max}, \quad i = 0, \dots, N-1, \quad (22)$$

where $T_{\tau,k}$ maps residual task acceleration to the complete pre-clip actuator torque, including projected arm task torque, stance feedback, null-space torque, and gravity offset. The reported simulations use the constrained OSQP path. The recovered force remains below its 80 N cap in the nominal experiments, so these results do not constitute an active-limit or safety-margin study. Scenario C uses a position-actuator realization with no configured actuator force range and therefore makes no torque-feasibility claim.

The disturbance $d(t)$ in (19) captures: (i) external pHRI forces; (ii) unmodeled contact reactions from the feet; and (iii) SRBD approximation error. Augmenting with an integrating disturbance state $\hat{d} \in \mathbb{R}^3$:

$$\begin{bmatrix} x_{e,k+1} \\ \hat{d}_{k+1} \end{bmatrix} = \underbrace{\begin{bmatrix} A_d & B_d \\ 0 & I \end{bmatrix}}_{A_{\text{aug}}} \begin{bmatrix} x_{e,k} \\ \hat{d}_k \end{bmatrix} + \begin{bmatrix} B_d \\ 0 \end{bmatrix} u_k + w_k \quad (23)$$

with $w \sim \mathcal{N}(0, Q_w)$ and $v \sim \mathcal{N}(0, R_v)$. Unlike the strict random-walk model of [3], in which process noise drives only the disturbance state, Q_w here retains a small block on x_e —two orders of magnitude below the $\hat{d}$ block (Section X)—to regularize the filter against the frozen-matrix and SRBD residuals of the floating-base setting; the offset-free property is unaffected, as it follows from the integrating structure of A_{aug} , not from the noise partition. The Kalman gain K_f is computed offline from the steady-state discrete algebraic Riccati equation. The integrating structure of A_{aug} guarantees $\hat{d}_k \rightarrow d$ for any bounded constant disturbance [16].

The free-response prediction fed into the QP is:

$$x_{\text{free}} = A_d^N x_e + \sum_{j=0}^{N-1} A_d^j B_d \hat{d} \quad (24)$$

This causes the optimizer to pre-load corrective force before the disturbance fully manifests at the end-effector.

VI. CONTACT-MODE CHANGES IN INTERACTION DYNAMICS

When a contact changes, $\bar{M}^{-1}$ and Λ_{arm} change, while (A_d, B_d) remain constant. The normalized disturbance can nevertheless jump because $d = \Lambda_{\text{arm}}^{-1} d_{\text{ext}}$. At contact switch time t_s , the following protocol is executed in order:

- 1) Recompute $\bar{M}^{-1}$ with the new J_c .

- 2) Recompute Λ_{arm} for force recovery and constraints.
- 3) **Covariance inflation:** $P_{\text{aug}} \leftarrow \alpha P_{\text{aug}}$, $\alpha \in [3, 5]$, to allow rapid re-estimation of the disturbance.
- 4) **Hold $\hat{d}$:** do not reset to zero—balance-related disturbances persist across contact transitions.

Covariance inflation is an adaptation heuristic, not a stability guarantee.

The predictor and Hessian are global constants. A mode library stores the contact Jacobian pattern and latest $\Lambda_{\text{arm}}^{(m)}$ used in recovery.

VII. IMPEDANCE AS THE INFINITE-HORIZON LIMIT

Theorem 1 (Impedance Equivalence of Predictive Interaction Dynamics). *Under rigid contacts, fixed contact mode, and no disturbance, the unconstrained infinite-horizon predictive interaction controller (Level 3, $N \rightarrow \infty$) renders a classical task-space impedance law:*

$$\Lambda_{\text{arm}}(q) \ddot{e} + \Lambda_{\text{arm}} K_v \dot{e} + \Lambda_{\text{arm}} K_e e = F_h \quad (25)$$

with effective configuration-adaptive mass $M_{d,\text{eff}} = \Lambda_{\text{arm}}(q)$ depending on both arm posture and contact configuration.

Proof. In the infinite-horizon unconstrained limit with $\hat{d} = 0$, the QP reduces to the discrete-LQR feedback $u = -K_\infty x_e$. Partition $K_\infty = [K_e \ K_v]$. Substituting into (19) with $d = \Lambda_{\text{arm}}^{-1} F_h$ gives $\ddot{e} = -(K_e e + K_v \dot{e}) + \Lambda_{\text{arm}}^{-1} F_h$, and premultiplying by Λ_{arm} yields (25). Hence the effective mass, damping, and stiffness are $M_{d,\text{eff}} = \Lambda_{\text{arm}}(q)$, $D_{\text{eff}} = \Lambda_{\text{arm}} K_v$, and $K_{\text{eff}} = \Lambda_{\text{arm}} K_e$. The gains (K_e, K_v) are the Riccati image of the QP weights (Q, R) , not the weights themselves; no direct equality between cost weights and physical stiffness/damping is assumed. The contact-consistent $\bar{M}^{-1}$ in Λ_{arm} makes the effective mass adapt to both the arm joint configuration and the active contact footprint. $\square$

Theorem 1 establishes that predictive interaction regulation generalizes classical impedance control: the finite-horizon constrained QP adds predictive disturbance rejection, constraint enforcement, and contact-mode adaptation while reducing to a classical linear impedance law in the infinite-horizon unconstrained limit. This is an asymptotic structural equivalence, not a claim that the deployed $N = 20$ gain equals the infinite-horizon gain. The QP weights (Q, R) tune the Riccati gains (K_e, K_v) indirectly; the physical stiffness and damping are the resulting $K_{\text{eff}} = \Lambda_{\text{arm}} K_e$ and $D_{\text{eff}} = \Lambda_{\text{arm}} K_v$, not the weights themselves.

Notably, all three closed-loop impedance parameters— $M_{d,\text{eff}}$, D_{eff} , and K_{eff} —adapt automatically as the arm configuration and contact state change, while the QP weights (Q, R) remain fixed design parameters. This adaptation is a structural by-product of $\Lambda_{\text{arm}}(q)$ and incurs no additional solver cost, preserving the ≥ 1 kHz control rate.

VIII. STABILITY OF NORMALIZED INTERACTION DYNAMICS

Theorem 2 (Nominal Zero Steady-State Error). *Suppose the deterministic normalized model is exact, the unconstrained*

regulator and observer are stable, the cancelling equilibrium is feasible, and $d_k \rightarrow d_\infty$. Then $\lim_{k \rightarrow \infty} \|e_{\text{arm},k}\| = 0$.

Proof. The claim combines regulator stability with offset-free disturbance rejection; these rest on two *distinct* structural properties, which the augmented model separates.

Regulator side. (A_d, B_d) is controllable because $[B_d \ A_d B_d]$ has rank six for every $\Delta t > 0$, so the normalized state can be driven to the origin by the unconstrained regulator. Realizing that command physically further requires Λ_{arm} to stay finite and positive-definite along the trajectory via (18a); a singular or rank-deficient Λ_{arm} would make the commanded force unrealizable regardless of the normalized model's controllability.

Offset-free (observer) side. The integrating block of A_{aug} has eigenvalues at 1 and is *not* controllable from u —the input $[B_d; 0]$ is zero on the $\hat{d}$ rows. This is by design: a constant disturbance is rejected through the internal-model plus observer, not by driving the $\hat{d}$ modes. The property actually required is *detectability* of (A_{aug}, C) with $C = [I_6 \ 0]$; since $\hat{d}$ enters the measured state x_e through B_d of full column rank, the augmented pair is detectable, and the steady-state Kalman filter gives $\hat{d}_k \rightarrow d$ for any bounded constant d . The free response (24) then pre-loads $-\hat{d}$, and the stable error loop converges to $e_\infty = 0$. Under saturation this conclusion applies only to feasible trajectories that remain in a positively invariant admissible set; the maximal set is not computed here. $\square$

Across a contact switch B_d remains constant, while the normalized disturbance can jump by Δd_s . A stable observer/regulator admits

$$\|e(t)\| \leq c_0 \rho^{t-t_s} \|z(t_s)\| + c_1 \|\Delta d_s\|, \quad 0 < \rho < 1, \quad (26)$$

where z stacks regulation and estimation error. This is an input-to-state bound for the normalized linear model, not a nonlinear-robot certificate.

The contact-consistent null-space torque enforcing joint limits is:

$$f_{\text{null}} = \bar{N}_{\text{arm}}^\top (-k_{\text{null}}(q - q_0) - d_{\text{null}}\dot{q} + g(q)) \quad (27)$$

where $\bar{N}_{\text{arm}} = I - \bar{J}_{\text{arm}} J_{\text{arm}}$ uses the contact-consistent pseudoinverse and $g(q)$ is the joint-limit barrier gradient. Under the same ideal hierarchy assumptions used above, projection through $\bar{N}_{\text{arm}}$ gives zero wrench at the arm task coordinate. With torque saturation or friction-cone active-set changes, this decoupling becomes approximate and must be enforced by the low-level QP limits.

IX. WHOLE-BODY REALIZATION AND FRAMEWORK COMPARISON

Combining all three levels, with every term again a generalized force in $\mathbb{R}^{n+6}$ and S extracting the actuated rows as in (14):

$$\tau = S \left(f_{\text{contact}} + \bar{N}_1^\top f_{\text{balance}} + \bar{N}_{12}^\top J_{\text{arm}}^\top F_{\text{arm}} + \bar{N}_{12}^\top f_{\text{null}} \right) \quad (28)$$

Equation (28) is the whole-body realization of the normalized interaction-dynamics controller; its arm term is exactly (18b). The hierarchical null-space structure follows the SK05

law [20] extended to the contact-consistent floating-base setting [19], [21]. The contribution here is not the null-space hierarchy itself, but the normalized predictive interaction acceleration u that occupies the residual arm channel. Under exact dynamics and inactive saturation/friction active-set changes, the projections $\bar{N}_1^\top$ and $\bar{N}_{12}^\top$ isolate this interaction layer from contact maintenance and balance, while the Kalman-augmented QP provides the offset-free disturbance rejection that the classical OS PD law (15) cannot achieve.

Table I summarizes the mathematical and architectural distinctions between the proposed framework and the most relevant prior work. The proposed acceleration-input matrices are constant; contact and configuration enter through force recovery. The table contrasts architecture and mathematical structure only; the cited works' quantitative results were not reproduced under a common benchmark, so it is not a head-to-head performance comparison.

X. THEORY-VALIDATION EXPERIMENTS

The simulations are organized as validation of the theory rather than as a catalog of scenarios. Scenarios A and C test the fixed-contact normalized predictor and offset-free disturbance rejection. Scenario B stress-tests the same predictor under periodic contact shocks; with both feet planted at the reported gains the disturbance observer is the dominant factor and the contact-consistent and free-space predictors coincide. Scenarios E and F test whether the same interaction layer remains well behaved when the support model changes while the force-recovery inertia is updated. The experiments therefore target the paper's central claims: constant normalized state dynamics, contact-dependent input matrices, offset-free disturbance rejection in the normalized coordinates, and stable operation across contact-mode switches.

A. Simulation Platform

All experiments were conducted in MuJoCo 3.2 [23] at a 2 kHz integration rate. Scenarios A and B use a biped comprising a 3-DOF right arm, two 4-DOF legs, and a 6-DOF unactuated floating base (17 DOF total, 11 actuated), with total mass 46 kg. Scenario C uses the official **Unitree G1** MJCF model from MuJoCo Menagerie (29 actuators, 35 generalized velocities, 34.04 kg), augmented with a single end-effector site at `right_wrist_yaw_link`. The G1 model uses position actuators ($K_p = 500$, $\text{dampratio} = 1$); Level 3 applies the position-as-torque approximation ($\Delta q_i = \tau_i / K_p$) to inject predictive interaction forces through the position channel.

The legs are held in double support by a joint-space PD balance controller; the centroidal-MPC balance planner of Section V is not exercised in these static/fixed-stance scenarios. The normalized interaction layer runs at 1 kHz with $N = 20$, $\Delta t_3 = 1$ ms in Scenarios A–C and E, and at 2 kHz with $\Delta t_3 = 0.5$ ms in Scenario F, whose quasi-static balance stand-in requires the faster inner rate; the physics step is 0.5 ms throughout. Note that these simulations recompute $\bar{N}_{12}(q)$, $\Lambda_{\text{arm}}(q)$, and μ_{arm} at *every* interaction-layer step rather than holding them across interleaved cycles, so the 500 Hz Level-2 rate and the associated frozen-matrix approximation

TABLE I
ARCHITECTURAL AND MATHEMATICAL COMPARISON

Aspect	Base [3]	Bellicoso et al. [6]	Kim et al. [5]	Proposed
Primary objective	Fixed-base pHRI	Quadruped locomotion	Dynamic locomotion	Normalized interaction dynamics for floating-base pHRI
Task-space inertia	$(JM^{-1}J^T)^{-1}$	N/A	N/A	$(J\tilde{M}^{-1}J^T)^{-1}$
Prediction horizon	N -step QP	$N = 1$	~ 10 – 30 steps	N -step QP (≥ 1 kHz)
Disturbance handling	Kalman, fixed base	WBC weight tuning	Centroidal inertia	Kalman: pHRI + leg momentum
Input matrix	Force-input, inertia dependent	N/A	N/A	Constant acceleration-input B_d
Null-space use	Joint centering	Posture tracking	Locomotion	Predictive interaction QP
Steady-state error	Zero (fixed base)	Nonzero under load	Nonzero under load	Zero (Theorem 2)
Contact transitions	N/A	Mode switching	Gait phases	Covariance-inflation protocol

TABLE II
BENCHMARKED CONTROLLERS

Label	Description
D1	Operational-space PD (task PD, no priority hierarchy), Cartesian stiffness $K_x = 800$ N/m, damping $D_x = 40$ Ns/m
D2	Operational-space PI: adds $K_I = 150$ N/(m·s) with anti-windup
D3	Fixed-base impedance MPC [3] (uses M^{-1} instead of $\tilde{M}^{-1}$)
D4	WBC assembler + null-space PD centering (no prediction)
D5	Proposed: WBC + predictive interaction regulation, no Kalman
D6	Proposed: WBC + predictive interaction regulation + Kalman, no inflation ($\alpha = 1$)
D7	Proposed full: WBC + predictive interaction regulation + Kalman + covariance inflation ($\alpha = 4$)
D8	Scenario A only: same allocation as D4, but the actuator-torque box is enforced by an explicit per-step OSQP solve (Bellicoso-style cascaded QP) instead of post-hoc clipping

of Section V are a statement about the intended hardware deployment and are not exercised—nor stress-tested—by these benchmarks. Friction-cone half-angle $\mu = 0.6$. Level 3 cost weights: $Q = \text{diag}(6 \times 10^4 I_3, 60 I_3)$, $R = 0.01 I_3$. Kalman noise: $Q_w = \text{diag}(10^{-4} I_6, 10^{-2} I_3)$, $R_v = 10^{-6} I_3$. Covariance-inflation coefficient $\alpha = 4$. Scenarios B, C, E, and F are each a single deterministic MuJoCo rollout per controller; no seed variation or repeated-trial statistics are collected there, so those reported values are point estimates of one deterministic nonlinear simulation rather than samples from a stochastic ensemble. Scenario A additionally reports a 10-seed ensemble (disturbance magnitude jittered $\pm 15\%$, onset time jittered ± 0.1 s) as mean $\pm$ std alongside its single nominal-case row.

B. Benchmarked Controllers

Seven controllers are evaluated across all scenarios (Table II); Scenario A additionally reports an eighth, D8, described below.

D1 establishes the analytical baseline: for Cartesian stiffness $K_x = 800$ N/m and $F_h = 8$ N, (16) predicts $e_\infty = F_h/K_x = 10.0$ mm exactly.

TABLE III
SCENARIO A — FIXED STANCE, 8 N STEP DISTURBANCE

Controller	Nominal		10-seed jitter, mean $\pm$ std	
	RMS	SS	RMS [mm]	SS [mm]
D1 OS PD	9.24	10.17	8.96 ± 0.95	9.84 ± 1.08
D2 OS PI	6.82	5.86	6.60 ± 0.71	5.66 ± 0.65
D3 Free-space recovery	4.60	0.317	4.54 ± 0.22	0.316 ± 0.004
D4 WBC + PD	10.02	10.83	9.70 ± 1.07	10.47 ± 1.19
D5 Proposed, no Kalman	19.02	20.19	18.72 ± 1.02	19.84 ± 1.19
D6 Proposed, no inflation	4.54	0.139	4.49 $\pm$ 0.23	0.135 $\pm$ 0.037
D7 Proposed full	4.54	0.139	4.49 $\pm$ 0.23	0.135 $\pm$ 0.037
D8 HQP WBC + PD	10.02	10.83	9.70 ± 1.07	10.47 ± 1.19

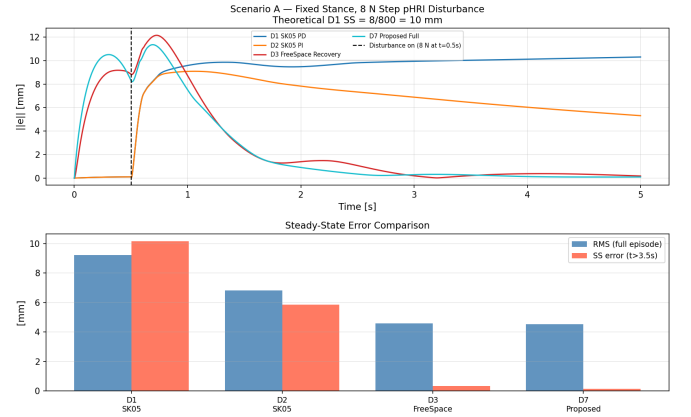


Fig. 1. Scenario A — Fixed double-support stance, 8 N step pHRI at $t = 0.5$ s. *Top*: Cartesian end-effector error norm $\|e\|$ over time. The Kalman-augmented predictive controller removes most of the steady-state offset, while the no-Kalman predictive controller is biased by the sustained pHRI load. *Bottom*: RMS and steady-state (SS) error bar chart. D4–D6 and D8 are omitted for readability and reported in Table III.

C. Scenario A: Fixed Double-Support Step Disturbance

The robot holds a stationary double-support stance. At $t = 0.5$ s, a step pHRI force of 8 N is applied at the end-effector in the x -direction and held for the remaining 4.5 s. Results are shown in Table III and Fig. 1.

Key findings: (1) The reactive baselines (D1, D4) leave the theoretical 10 mm impedance offset (8 N/800 N/m). (2) The disturbance observer and input-centered QP are essential under sustained force: D6/D7 reduce steady-state error to 0.139 mm, a $73\times$ reduction relative to D1's 10.17 mm, whereas D5 remains at 20.19 mm. D3 reaches 0.317 mm, so this fixed

TABLE IV
SCENARIO B — STANCE + 1 HZ SHOCKS, SUSTAINED 8 N PHRI

Controller	RMS err [mm]	Peak at switch [mm]
D1 OS PD	10.94	15.77
D2 OS PI	5.91	10.17
D3 Free-space recovery	4.49	4.64
D4 WBC + PD	11.92	17.30
D5 Proposed, no Kalman	21.19	24.96
D6 Proposed, no inflation	4.37	4.65
D7 Proposed full	4.37	4.65

stance does not isolate a substantial contact-consistency benefit. Inflation is inactive. (3) The 10-seed disturbance-jitter ensemble reproduces the same ranking with the same ratio: D7's mean SS error is 0.135 mm against D1's 9.84 mm, a $73\times$ reduction, so the single nominal-case result above is not an artifact of one particular disturbance draw. (4) D8 replaces D4's post-hoc torque clip with an explicit per-step OSQP box solve—a direct instantiation of Bellicoso et al.'s cascaded-QP hierarchical WBC [6], [10] rather than the analytic-projection proxy used elsewhere in this paper. D8 matches D4 to within 3×10^{-10} mm on every seed: in this untested-actuator-limit regime the two enforcement mechanisms are numerically indistinguishable, so D4 is confirmed—not merely assumed—to already report what a genuine cascaded-QP baseline would.

D. Scenario B: Stance with Periodic Transmitted Force Shocks

The robot holds double-support stance while a sustained 8 N PHRI force and periodic 6 N spikes (1 Hz, 0.1 s duration) are applied. Results are shown in Table IV and Fig. 2.

Under sustained load plus periodic shocks, the disturbance observer is again the dominant factor: the no-Kalman predictive controller (D5, 21.19 mm RMS) is biased by the sustained load, while the Kalman-augmented controllers track to ≈ 4.4 mm. Because both feet stay planted throughout—the shocks are applied as force spikes, not an actual contact-set change—the free-space (D3, 4.49 mm) and contact-consistent (D7, 4.37 mm) recoveries are nearly indistinguishable here; the value of contact-consistency requires the support model itself to switch (Scenarios E and F). Covariance inflation is inert (D6=D7) because the contact mode never changes.

E. Scenario C: Unitree G1 Real Model, Fixed Stance

Scenario A is repeated on a Menagerie-derived Unitree G1 MJCF (29 actuators, 35 generalized velocities, 34.04 kg). The benchmark overrides the XML's 2 ms timestep with 0.5 ms. Results are shown in Table V and Fig. 3.

As in Scenario A, the static G1 stance does not distinguish contact-consistent from free-space recovery: D3 (1.493 mm SS) and D7 (0.884 mm) remain the same order, a $10.7\times$ reduction relative to D1's 9.50 mm. D5 remains at 20.50 mm, confirming that disturbance estimation drives the improvement. Hardware torque-mode performance is not inferred from this position-actuator simulation.

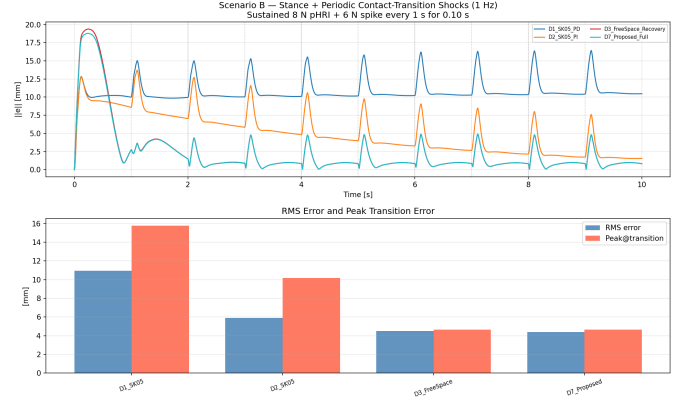


Fig. 2. Scenario B — double-support stance, sustained 8 N PHRI + 6 N periodic shocks at 1 Hz. The disturbance observer removes the steady-state bias (D5 is offset, D6/D7 track to a few mm); with both feet planted, the free-space (D3) and contact-consistent (D7) predictors coincide (Table IV).

TABLE V
SCENARIO C — UNITREE G1 MODEL (34.04 KG), FIXED STANCE, 8 N STEP

Controller	RMS err [mm]	SS err [mm]
D1 OS PD	9.06	9.50
D2 OS PI	6.50	4.98
D3 Free-space recovery	8.06	1.493
D4 WBC + PD	9.06	9.50
D5 Proposed, no Kalman	16.77	20.50
D6 Proposed, no inflation	6.85	0.884
D7 Proposed full	6.85	0.884

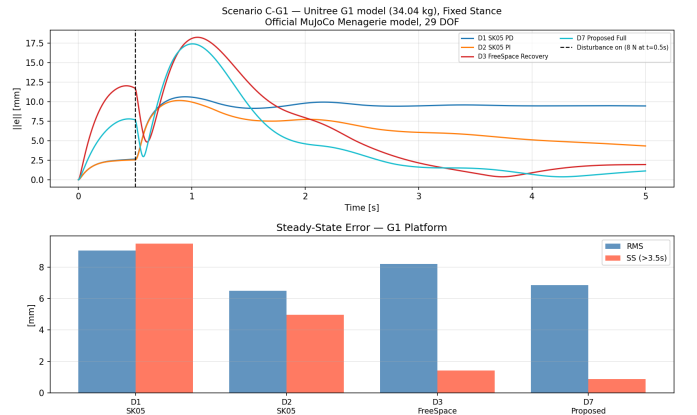


Fig. 3. Scenario C — Menagerie-derived Unitree G1 model (34.04 kg), fixed stance, 8 N step PHRI. In static G1 stance the contact-consistent (D7) and fixed-base (D3) predictive controllers are indistinguishable; the Kalman-augmented controllers reduce the steady-state offset. D4–D6 are omitted for readability and reported in Table V.

F. Theorem and Inertia Diagnostics

For the reported $(Q, R, \Delta t)$, the relative first-step gain error $\|K_N - K_\infty\|/\|K_\infty\|$ is 0.671 at $N = 20$, 0.0246 at $N = 80$, and 9.13×10^{-5} at $N = 160$. This verifies asymptotic convergence while showing that the deployed controller is not numerically equal to the infinite-horizon impedance gain. At the nominal toy-biped posture, the free-space, double-support, and

TABLE VI
SCENARIO E — BRACING-HAND SUPPORT TRANSITION, SUSTAINED 8 N PHRI

Controller	RMS err [mm]	Peak at switch [mm]
D5 no Kalman	20.11	20.38
D6 Kalman, no infl. ($\alpha = 1$)	4.54	7.81
D7 Kalman + infl. ($\alpha = 4$)	4.34	7.65

right-support task-inertia diagonals are $[1.138, 1.092, 2.544]$, $[1.140, 1.094, 2.557]$, and $[1.139, 1.093, 2.557]$ kg. Their small separation explains why fixed-stance D3 and D7 remain of the same order.

G. Scenario E: Bracing-Hand Support Transition

To exercise a *genuine* contact-mode transition without single-support balance, the biped is given a left arm that periodically braces against and releases a fixed rail while both feet remain planted. The active contact set alternates $\{\text{L foot}, \text{R foot}\} \leftrightarrow \{\text{L foot}, \text{R foot}, \text{L hand}\}$ (J_c : 6 $\leftrightarrow$ 9 rows), so $\bar{M}^{-1}$ and Λ_{arm} switch while the normalized (A_d, B_d) remain constant. A sustained 8 N pMRI force acts on the right (task) arm throughout.

This scenario validates disturbance estimation across a genuine contact-set switch. The no-Kalman controller is biased by the sustained pMRI load (20.11 mm RMS), while the Kalman-augmented controllers track the switch to ~ 4.4 mm. Here covariance inflation gives a small further improvement (D7 4.34 mm / 7.65 mm peak vs D6 4.54 / 7.81), consistent with adaptation to a changed normalized disturbance rather than a changed predictor. Scenario F extends the contact-model test to a scheduled *single* $\leftrightarrow$ *double* support-mode transition for the interaction layer.

H. Scenario F: Quasi-Static Single $\leftrightarrow$ Double Support Transition

Scenarios B and E hold both feet planted; this scenario exercises a scheduled change of the *foot-support model* used by the interaction layer, in which the biped shifts its weight over the right foot, lifts the left foot, switches the contact-dependent recovery from double to right-foot support, holds, and places the foot back:

$$\{\text{L foot}, \text{R foot}\} \longleftrightarrow \{\text{R foot}\},$$

so the contact Jacobian used by the interaction-layer model (J_c : 6 $\leftrightarrow$ 3 rows), $\bar{M}^{-1}$, and Λ_{arm} switch; (A_d, B_d) do not. The interaction layer runs above the balance controller with a sustained 8 N pMRI force on the arm; the arm regulates a target fixed relative to the torso, isolating its disturbance-rejection task from the balancing motion.

Balance stand-in and its limitations. Realizing a standing single-support phase requires *ankle-roll* (lateral centre-of-pressure) authority, which the biped of Scenarios A/B/E lacks; hip-roll balancing alone produces a foot-tipping moment that cannot be countered and the robot falls. We therefore use a modified model (biped_qstatic: a wider 18 cm foot

TABLE VII
SCENARIO F — QUASI-STATIC SINGLE $\leftrightarrow$ DOUBLE SUPPORT TRANSITION, SUSTAINED 8 N PHRI (TORSO-RELATIVE ARM ERROR)

Controller	RMS err [mm]	Peak at switch [mm]
D5 no Kalman	24.11	25.72
D6 Kalman, no infl. ($\alpha = 1$)	12.48	16.68
D7 Kalman + infl. ($\alpha = 4$)	12.42	16.68

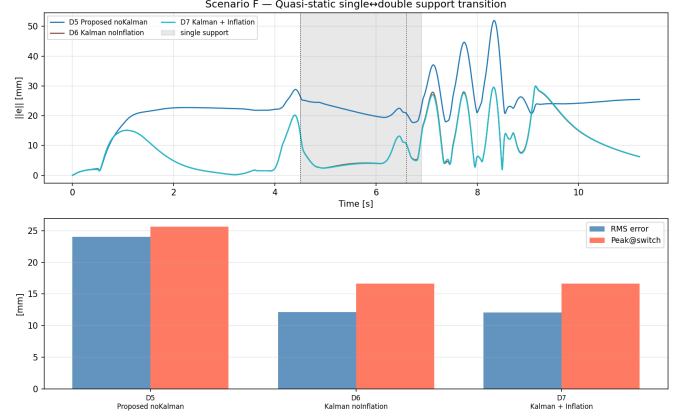


Fig. 4. Scenario F — torso-relative arm error across a quasi-static scheduled single $\leftrightarrow$ double support-mode transition (shaded: right-foot-support model). All controllers stay stable across the contact-model switch; the Kalman gives a modest offset improvement and covariance inflation is neutral (Table VII).

and added ankle-roll actuators) and a hand-tuned quasi-static controller—a stiff hip-roll CoM regulator for the coarse weight transfer plus a centre-of-pressure-limited ankle-roll torque for the fine support-mode stabilization. This is a deliberate minimal stand-in for the Level-1 balance layer, *not* the centroidal MPC of Section V. MuJoCo contact auditing detects the lifted foot on the floor during 90.4% of the nominal single-support interval, so Scenario F is only a support-mode/contact-model switch test for the interaction layer, not as a full dynamic walking or physically clean single-support result. Classical baselines D1–D4 are omitted from this scenario because they carry no observer or predictive mechanism to condition on the scheduled switch and their fixed-stance behavior is already characterized in Scenarios A–C; Table VII therefore isolates the effect of Kalman conditioning and covariance inflation across the transition.

The biped stays upright (minimum torso height 0.861 m), but the contact audit precludes a physical single-support claim. The recovered inertia changes by less than two percent: $[1.11, 1.04, 2.30]$ kg in the double-support model versus $[1.09, 1.04, 2.31]$ kg in the right-foot model.

The observer reduces RMS error from 24.11 to 12.42 mm. Inflation is neutral within numerical variation: RMS changes from 12.48 to 12.42 mm while switch peak is 16.68 mm for both controllers.

XI. CONCLUSION

This paper proposed contact-consistent interaction dynamics normalization for floating-base pMRI. The central result is

that, after balance and contact tasks are removed through the whole-body hierarchy, the residual end-effector interaction channel reduces to a linear double integrator with constant discrete state and input matrices. Whole-body control, null-space projection, disturbance observation, and contact-mode scheduling are the realization mechanisms; the underlying object being regulated is the normalized interaction dynamics.

This viewpoint explains the empirical results. The disturbance observer is the primary driver of fixed-stance accuracy. The toy model's free-space and contact-consistent inertias differ by about one percent near the tested posture, so the experiments do not establish a large performance gain from contact consistency alone. In the two scenarios with a full baseline sweep (Scenarios A and C), the Kalman-augmented controller nonetheless reduces steady-state error by $73\times$ and $10.7\times$ relative to the reactive operational-space PD baseline, confirming that disturbance-observer conditioning, not contact consistency alone, drives the improvement. The Impedance Equivalence Theorem further shows that classical operational-space impedance is recovered as the infinite-horizon limit of the same predictive interaction law, so impedance becomes a design interpretation rather than the starting point of the method. The simulations also demonstrate operation across scheduled support-mode/contact-model changes, although a fully dynamic single-support walking transition with a complete centroidal-MPC balance layer remains future work. More broadly, the normalization perspective suggests a common foundation for pHRI, loco-manipulation, dexterous manipulation, surgical robotics, and other contact-rich systems: first represent the task as interaction dynamics, then normalize those dynamics into a configuration-invariant predictive control problem.

The proposed framework occupies a structural niche not addressed by prior locomotion-centric frameworks [4]–[7]: it deliberately halts the WBC stack after balance constraints are satisfied and injects normalized predictive interaction regulation into the residual null space.

Future work includes hardware validation on a Unitree R1 or G1 EDU platform (the low-level SDK torque interface is directly compatible with the proposed architecture), extension to variable contact modes during dynamic walking, and integration of force-torque sensor feedback for improved Kalman convergence at contact transitions.

REFERENCES

- [1] N. Hogan, "Impedance control: An approach to manipulation—Parts I, II, III," *ASME J. Dyn. Syst. Meas. Control*, vol. 107, no. 1, pp. 1–24, 1985.
- [2] Y. Cao, K. Cheng, and G. Li, "Passive model-predictive impedance control for safe physical human–robot interaction," *IEEE Trans. Cogn. Dev. Syst.*, 2023.
- [3] Y. Cao and J. Tang, "Impedance MPC for physical human–robot interaction: Predictive disturbance rejection with joint-limit safety," *arXiv preprint arXiv:2606.08281*, 2026.
- [4] J. Di Carlo, P. M. Wensing, B. Katz, G. Bledt, and S. Kim, "Dynamic locomotion in the MIT Cheetah 3 through convex model-predictive control," in *Proc. IEEE/RSJ IROS*, 2018, pp. 1–9.
- [5] D. Kim, J. Di Carlo, B. Katz, G. Bledt, and S. Kim, "Highly dynamic quadruped locomotion via whole-body impulse control and model predictive control," in *Proc. IEEE/RSJ IROS*, 2019, pp. 4656–4663.

- [6] C. D. Bellicoso, C. Gehring, J. Hwangbo, P. Fankhauser, and M. Hutter, "Perception-less terrain adaptation through whole body control and hierarchical optimization," in *Proc. IEEE-RAS Humanoids*, 2016, pp. 558–564.
- [7] T. Koolen *et al.*, "Design of a momentum-based control framework and application to the humanoid robot Atlas," *Int. J. Humanoid Robotics*, vol. 13, no. 1, 2016.
- [8] K. Haninger, C. Hegeler, and L. Peternel, "Model predictive impedance control with Gaussian processes for physical and task-space constraints," in *Proc. IEEE ICRA*, 2022, pp. 3739–3745.
- [9] L. Roveda, J. Maskani, P. Franceschi, A. Ghezzi, F. Braghin, L. M. Tosatti, and N. Pedrocchi, "Model-based reinforcement learning variable impedance control for human–robot collaboration," *J. Intell. Robot. Syst.*, vol. 100, no. 2, pp. 417–433, 2020.
- [10] C. D. Bellicoso, K. Krämer, M. Stäuble, D. Sako, F. Jenelten, M. Bjelonic, and M. Hutter, "ALMA – articulated locomotion and manipulation for a torque-controllable robot," in *Proc. IEEE Int. Conf. Robotics and Automation (ICRA)*, 2019, pp. 8477–8483.
- [11] J.-P. Sleiman, F. Farshidian, M. V. Meduri, and M. Hutter, "A unified MPC framework for whole-body dynamic locomotion and manipulation," *IEEE Robot. Autom. Lett.*, vol. 6, no. 3, pp. 4688–4695, 2021.
- [12] A. Winkler, C. D. Bellicoso, M. Hutter, and J. Buchli, "Gait and trajectory optimization for legged systems through phase-based end-effector parameterization," *IEEE Robot. Autom. Lett.*, vol. 3, no. 3, pp. 1560–1567, 2018.
- [13] R. Grandia, F. Jenelten, S. Yang, F. Farshidian, and M. Hutter, "Perceptive locomotion through nonlinear model-predictive control," *IEEE Trans. Robotics*, vol. 39, no. 5, pp. 3402–3421, 2023.
- [14] L. Villani and J. De Schutter, "Force control," in *Springer Handbook of Robotics*, 2nd ed., B. Siciliano and O. Khatib, Eds. Springer, 2016, pp. 195–220.
- [15] A. Albu-Schäffer, C. Ott, and G. Hirzinger, "A unified passivity-based control framework for position, torque and impedance control of flexible joint robots," *Int. J. Robot. Res.*, vol. 26, no. 1, pp. 23–39, 2007.
- [16] Y.-Y. Cao, Z. Lin, and D. G. Ward, "Anti-windup design of output tracking systems subject to actuator saturation and constant disturbances," *Automatica*, vol. 40, no. 7, pp. 1221–1228, Jul. 2004.
- [17] —, "An antiwindup approach to enlarging domain of attraction for linear systems subject to actuator saturation," *IEEE Trans. Autom. Control*, vol. 47, no. 1, pp. 140–145, Jan. 2002.
- [18] Y.-Y. Cao and Z. Lin, "Min–max MPC algorithm for LPV systems subject to input saturation," *IEEE Proc. Control Theory Appl.*, vol. 152, no. 3, pp. 266–272, May 2005.
- [19] O. Khatib, "A unified approach for motion and force control of robot manipulators: The operational space formulation," *IEEE J. Robot. Autom.*, vol. 3, no. 1, pp. 43–53, 1987.
- [20] L. Sentis and O. Khatib, "Synthesis of whole-body behaviors through hierarchical control of behavioral primitives," *Int. J. Humanoid Robotics*, vol. 2, no. 4, pp. 505–518, 2005.
- [21] L. Righetti, J. Buchli, M. Mistry, and S. Schaal, "Inverse dynamics control of floating-base robots with external constraints: A unified view," in *Proc. IEEE ICRA*, 2011, pp. 1085–1090.
- [22] D. E. Orin, A. Goswami, and S.-H. Lee, "Centroidal dynamics of a biped robot," *Int. J. Robot. Res.*, vol. 32, no. 9, pp. 1043–1060, 2013.
- [23] E. Todorov, T. Erez, and Y. Tassa, "MuJoCo: A physics engine for model-based control," in *Proc. IEEE/RSJ IROS*, 2012, pp. 5026–5033.