



8D4 调峰工况 (S0, 560 A 恒流, 6400 s) : 容量重标定前后对比


修复前 (旧工件, 容量低估 82~88%) : 末 1000 s 均温 25.33 °C (偏差 +0.33 K) , 带外 0 s

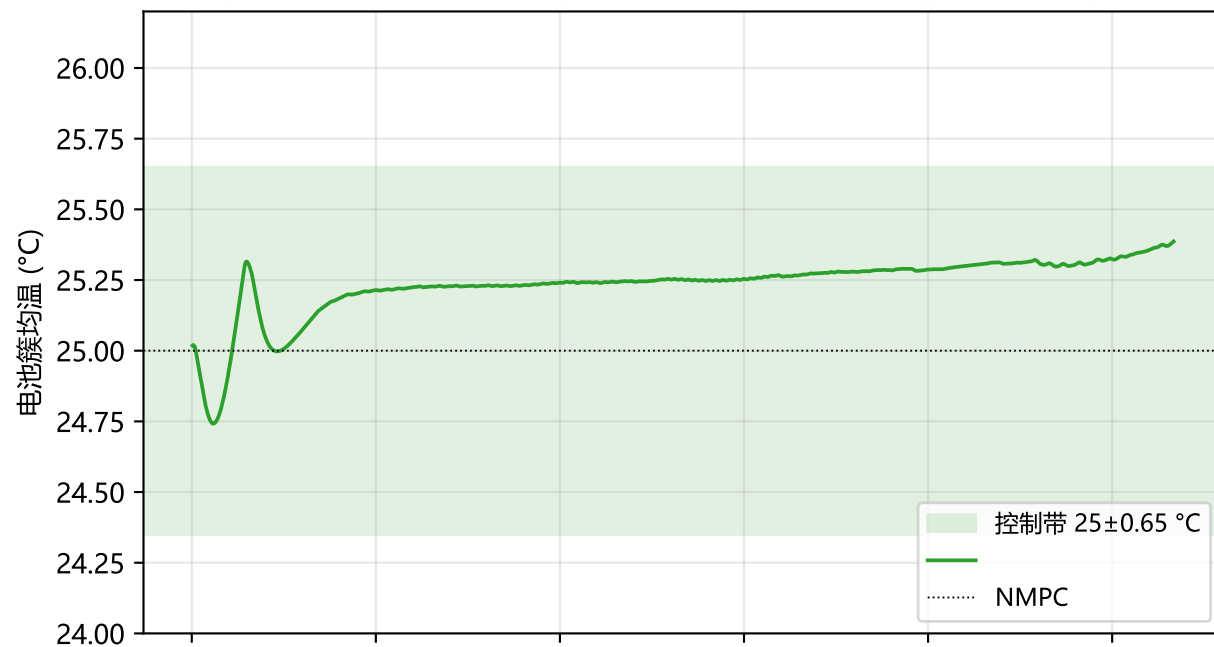

末 1000 s 指令: 均值 1958 rpm, 波动 1000~3647

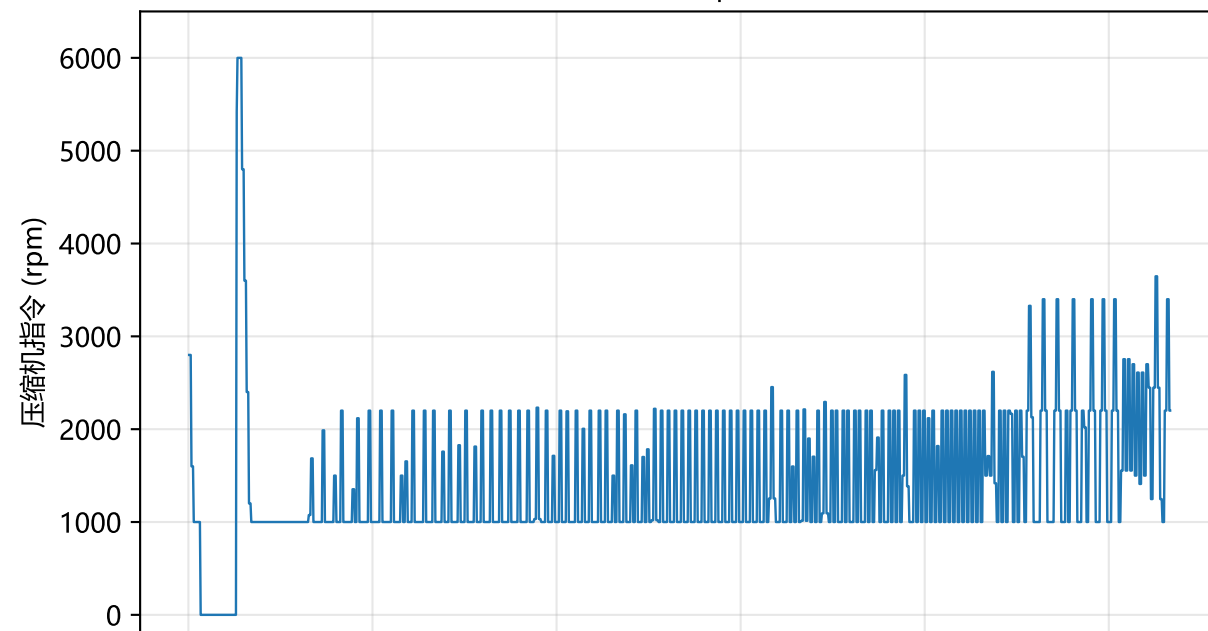

修复后 (8D4e 新工件, 验证误差 ±1%) : 末 1000 s 均温 25.45 °C (偏差 +0.45 K) , 带外 0 s

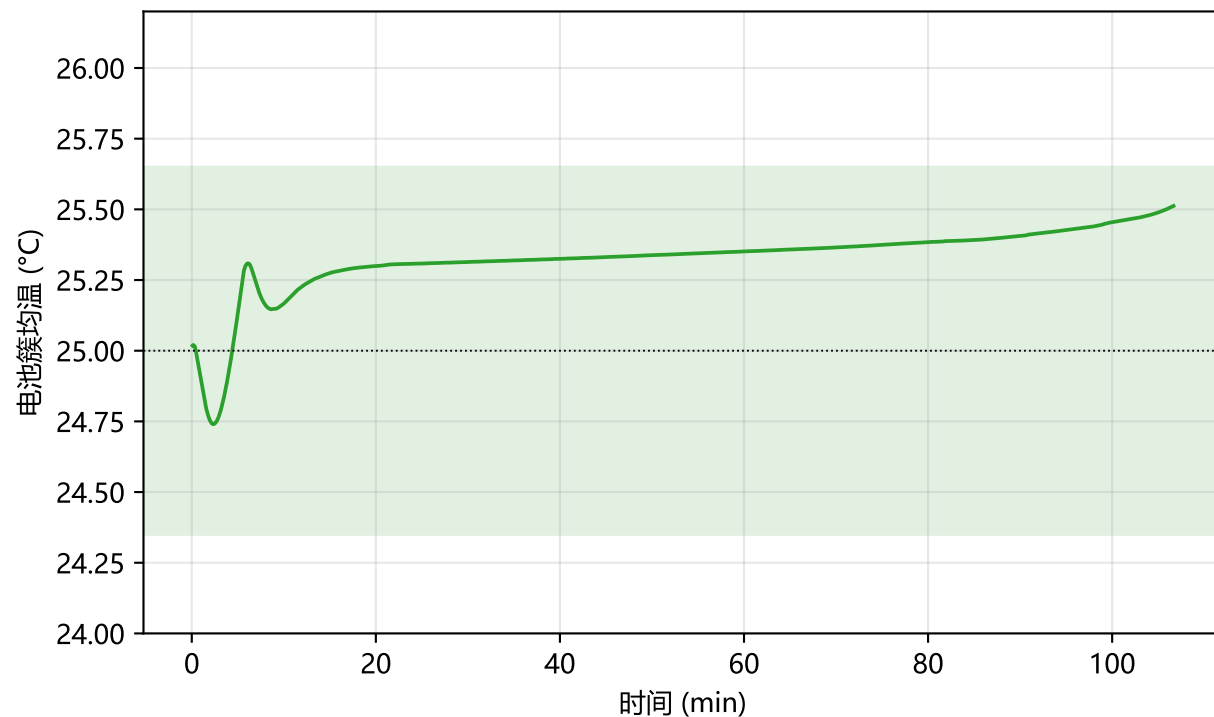

末 1000 s 指令: 均值 1912 rpm, 波动 1322~2289

