

Size 34 (86mm) stepper lead screw linear actuator provides high performance, can provide up to 2270N of continuous thrust.



- *Motor Specification*


Model	Rated Voltage (V)	Phase Current (A)	Phase Resistance (Ω)	Phase Inductance (mH)	Motor Length (mm)
LS086NB101	12.0	1.3	9.2	71.0	78
LS086NB102	5.1	3.0	1.9	15.0	78
LS086NB103	2.9	5.5	0.52	4.5	78
LS086NB201	3.0	6.0	0.6	4.2	100

Note : Other parameters can be customized

● Lead Screw Specification


Lead Code	Screw Dia. (inch/mm)	Lead (inch/mm)	Thread Starts
P0100	0.625/15.875	0.100/2.540	1
P0125		0.125/3.175	1
P0200		0.200/5.080	2
P0250		0.250/6.350	2
P0500		0.500/12.70	4
P1000		1.000/25.40	8

- *External Actuator Mechanical*

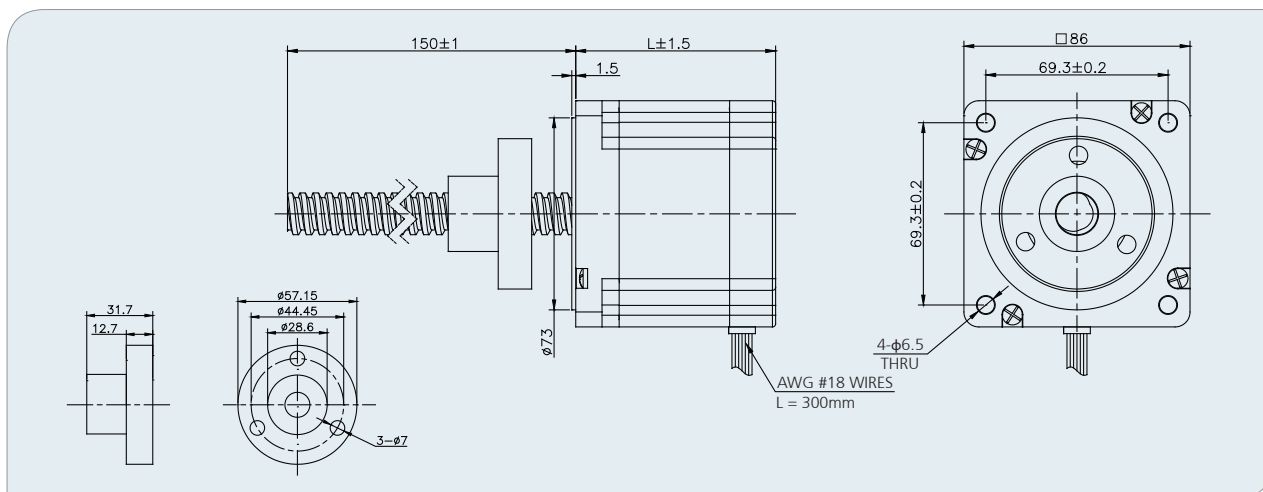

Size 34 (86mm) Series

● Non-Captive Actuator Mechanical

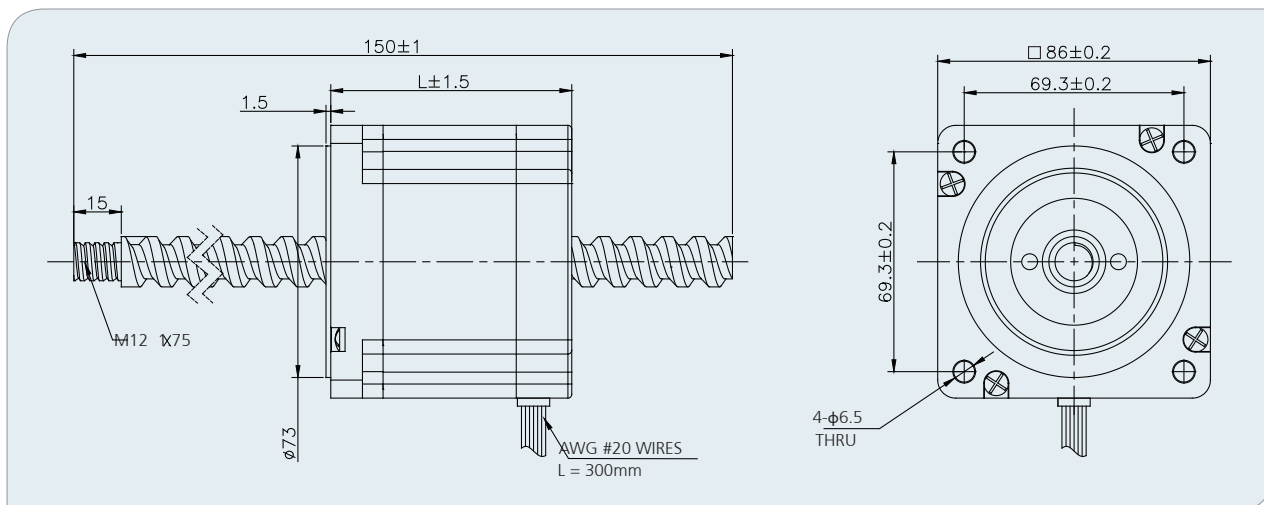

● Speed-Thrust Curves

