


DC BRUSHLESS MOTOR

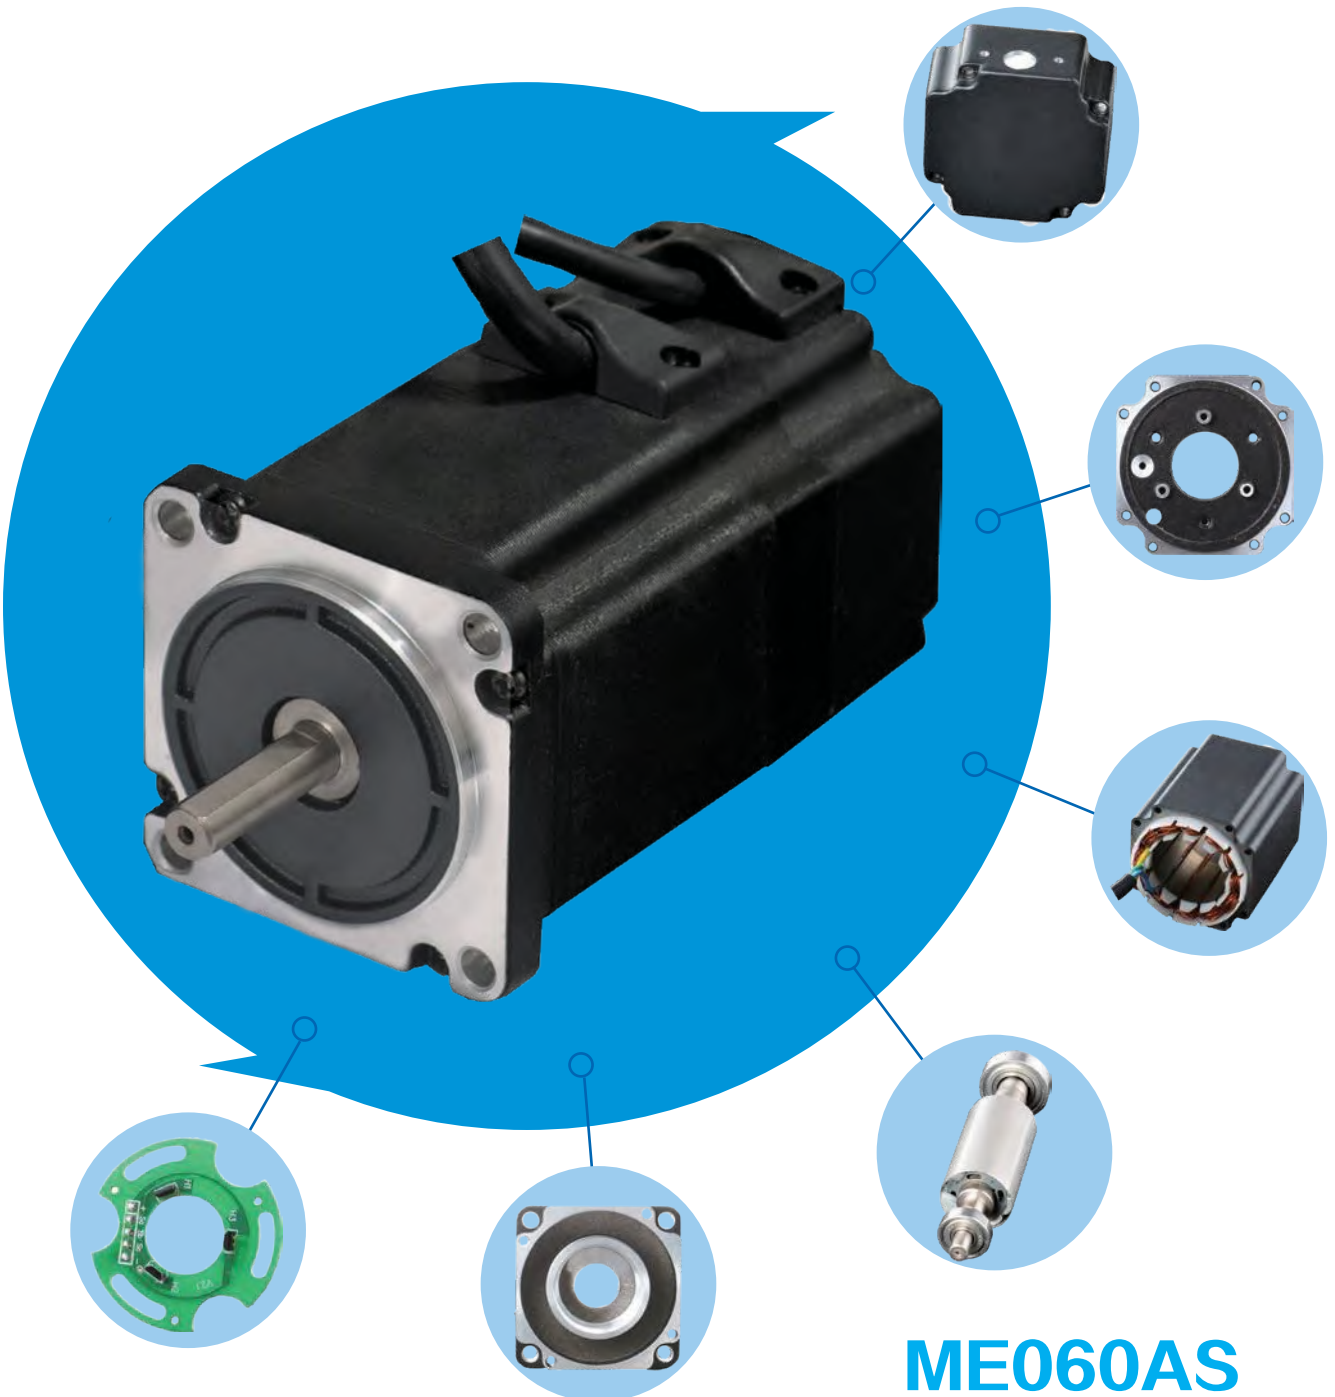

ME060AS

We can customize it according
to customer's requirements

ME042AS

DC Brushless Motor



General information


- NEMA 17 flange
- 8 poles with three phases
- 12 slots design for low cogging
- Insulation class B, higher insulation class on request
- Sintered Neo Magnet
- Integrated driver available

Specifications


SPECIFICATION		Unit	ME042AS100	ME042AS200	ME042AS300
Supply Voltage (reference)	(Vs)	Vdc	24	24	24
Rated Continuous Torque	(Tcr)	Nm	0.10	0.20	0.33
Rated Speed at Cont. Torque	(Scr)	rpm	3000	3000	3000
Rated Continuous Stall Current	(Ics)	A	2.25	4.8	7.8
Rated Continuous Output Power	(Po,c)	W	31	63	107
Rated Peak Torque	(Tpr)	Nm	0.30	0.77	1.20
Rated Peak Current	(Ipr)	A	7.18	20.27	30.77
Torque Constant	(KT)	Nm/A	0.0513	0.0513	0.0513
Voltage Constant	(KE)	V/krpm	5.37	5.37	5.37
Terminal Resistance	(Rmt)	Ω	2.40	0.98	0.62
Inductance	(L)	mH	1.7	0.58	0.38
Insulation Class			B	B	B
Rotor Inertia	(Jr)	Kg.m ²	2.90E-06	5.90E-06	8.90E-06
Motor Weight	(Wm)	Kg	0.36	0.55	0.65
Motor Length	(Lm)	mm	52	71	90

ME042AS

● Mechanical

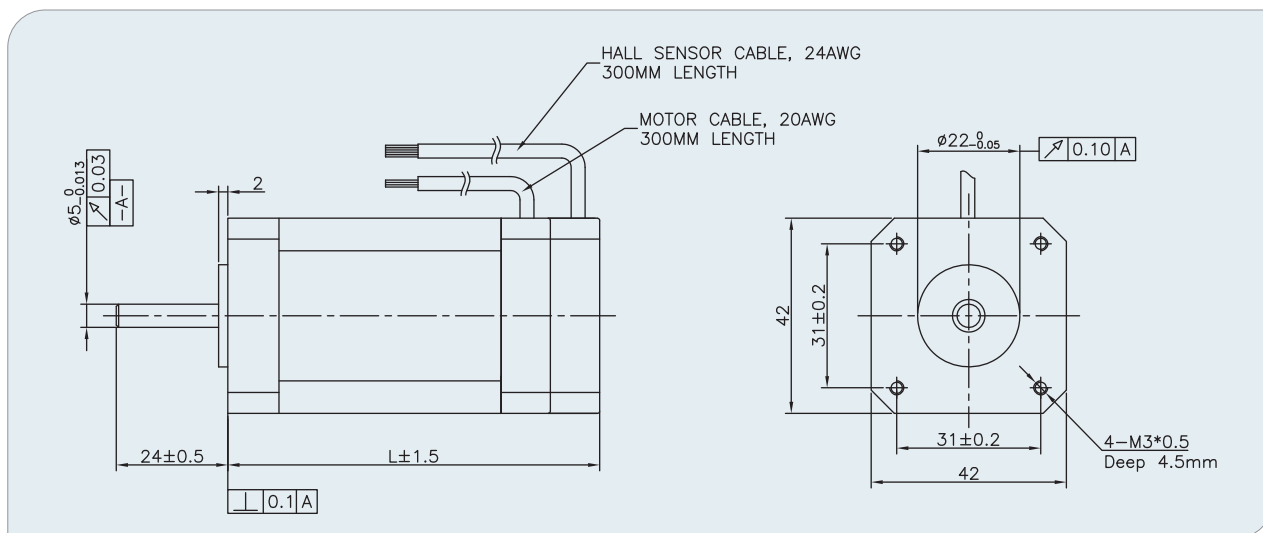

● Characteristic diagram

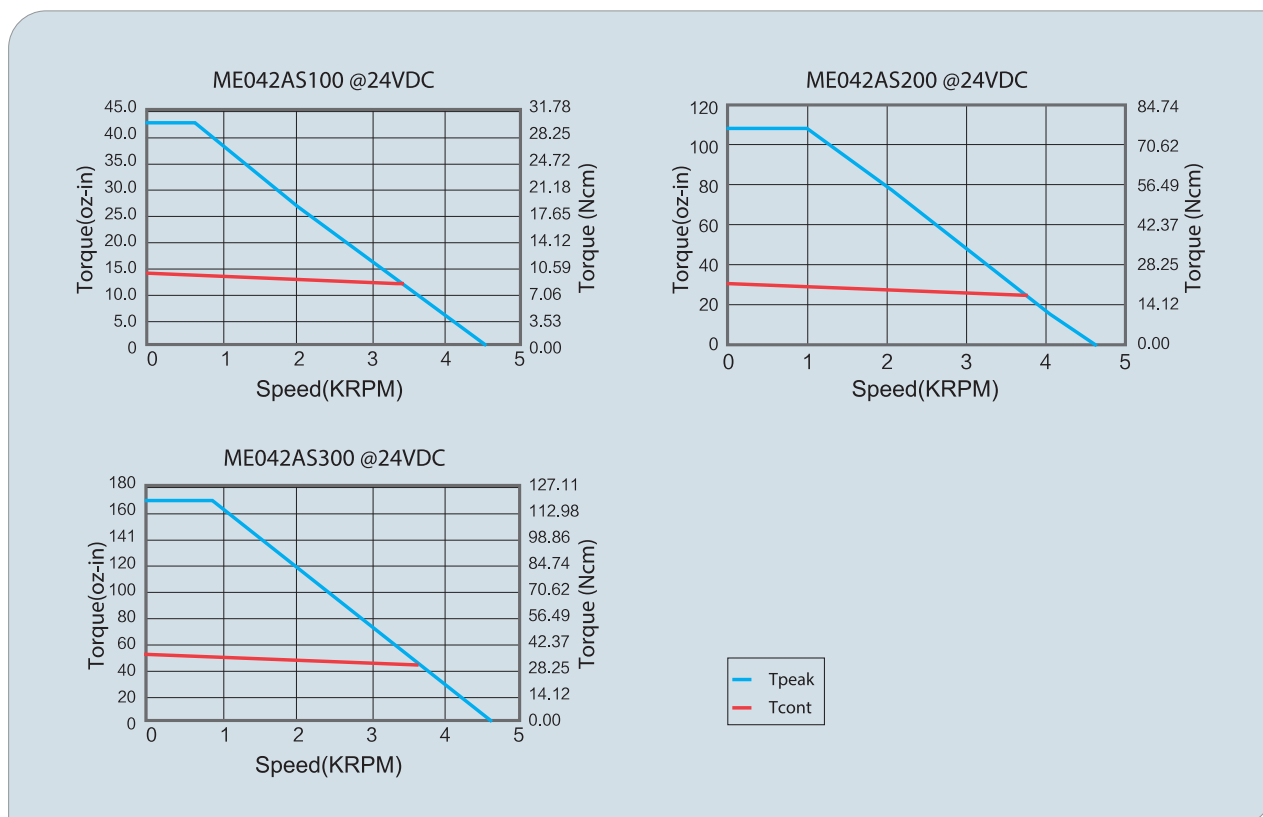

ME042GS

DC Brushless Motor



General information


- 8 poles with three phases
- 6 slots design for automatic winding
- Insulation class B, higher insulation class on request
- Bonded Neo Magnet
- Integrated driver available

Specifications


SPECIFICATION		Unit	ME042GS100	ME042GS200	ME042GS300	ME042GS400
Supply Voltage (reference)	(Vs)	Vdc	24	24	24	24
Rated Continuous Torque	(Tcr)	Nm	0.064	0.126	0.191	0.268
Rated Speed at Cont. Torque	(Scr)	rpm	4000	4000	4000	4000
Rated Continuous Stall Current	(Ics)	A	2.19	3.84	5.84	8.18
Rated Continuous Output Power	(Po,c)	W	27	53	80	112
Rated Peak Torque	(Tpr)	Nm	0.19	0.38	0.56	0.75
Rated Peak Current	(Ipr)	A	5.75	11.2	16.6	22.02
Torque Constant	(KT)	Nm/A	0.0359	0.0359	0.0359	0.0359
Voltage Constant	(KE)	V/krpm	3.76	3.76	3.76	3.76
Terminal Resistance	(Rmt)	Ω	1.80	0.72	0.55	0.28
Inductance	(L)	mH	2.60	1.2	0.8	0.54
Insulation Class			B	B	B	B
Rotor Inertia	(Jr)	Kg.m ²	2.80E-06	4.8E-06	7.2E-06	9.6E-06
Motor Weight	(Wm)	Kg	0.30	0.45	0.65	0.8
Motor Length	(Lm)	mm	41	61	81	100

ME042GS

● Mechanical

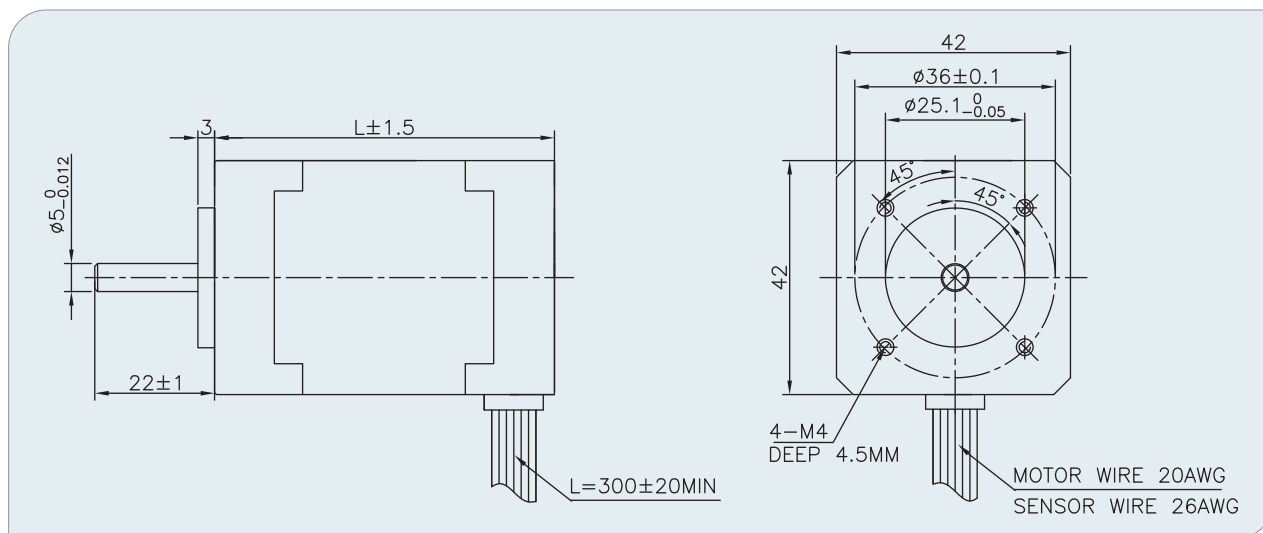


● Characteristic diagram

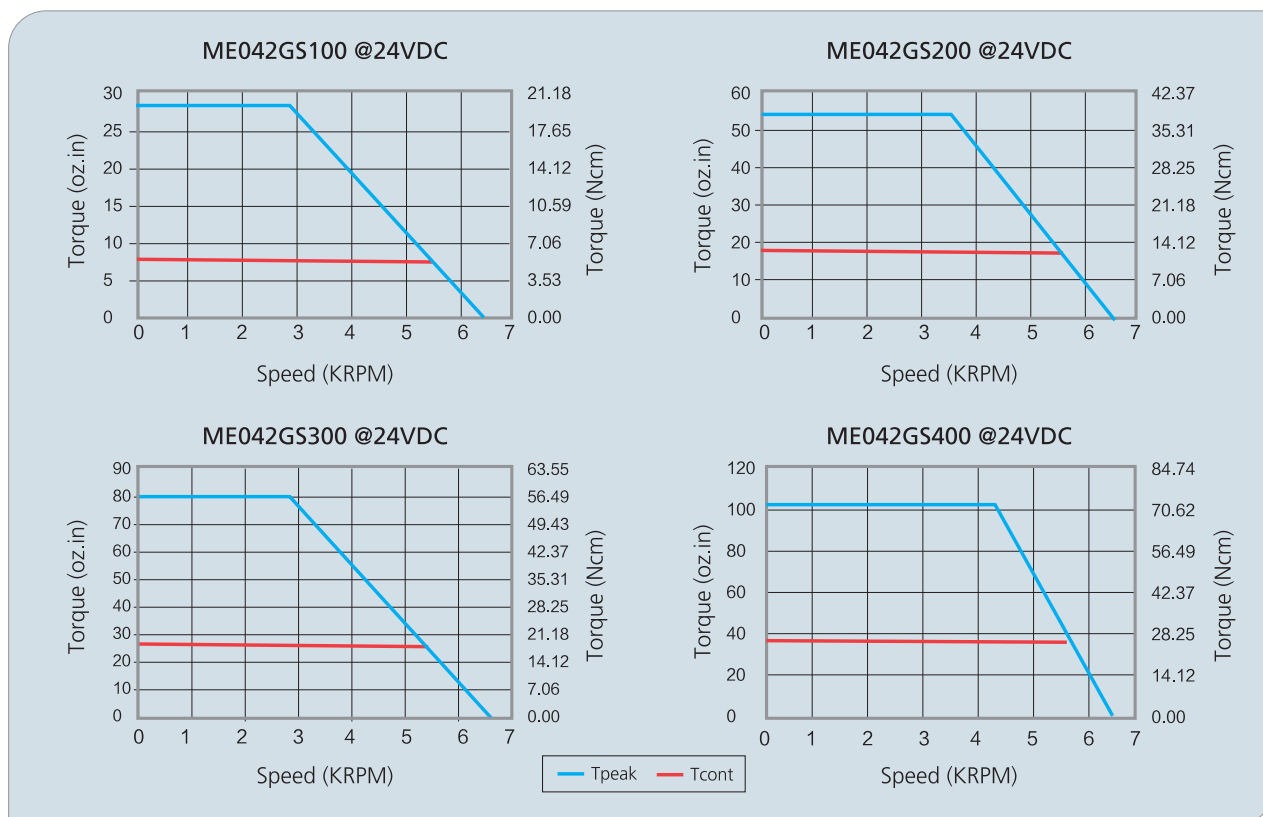

ME042YS

DC Brushless Motor

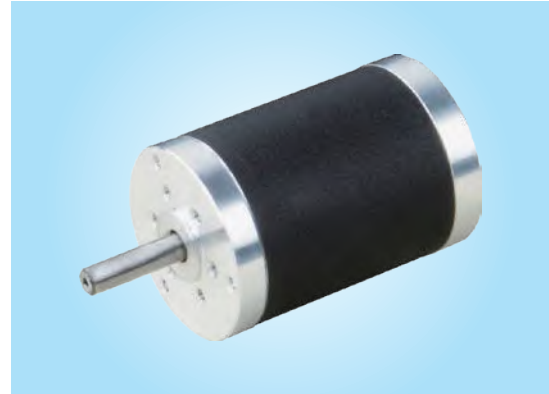

● General information


- 8 poles with three phases
- 6 slots design for automatic winding
- Insulation class B, higher insulation class on request
- Bonded Neo Magnet

● Specifications


SPECIFICATION		Unit	ME042YS100	ME042YS200
Supply Voltage (reference)	(Vs)	Vdc	24	24
Rated Continuous Torque	(Tcr)	Nm	0.077	0.169
Rated Speed at Cont. Torque	(Scr)	rpm	4000	4000
Rated Continuous Stall Current	(Ics)	A	2.91	5.23
Rated Continuous Output Power	(Po,c)	W	32	71
Rated Peak Torque	(Tpr)	Nm	0.24	0.45
Rated Peak Current	(Ipr)	A	7.49	13.25
Torque Constant	(KT)	Nm/A	0.0353	0.0353
Voltage Constant	(KE)	V/krpm	3.70	3.80
Terminal Resistance	(Rmt)	Ω	1.60	0.71
Inductance	(L)	mH	1.94	0.86
Insulation Class			B	B
Rotor Inertia	(Jr)	Kg.m ²	4.8E-06	6.5E-06
Motor Weight	(Wm)	Kg	0.40	0.6
Motor Length	(Lm)	mm	60	85

ME042YS

● Mechanical

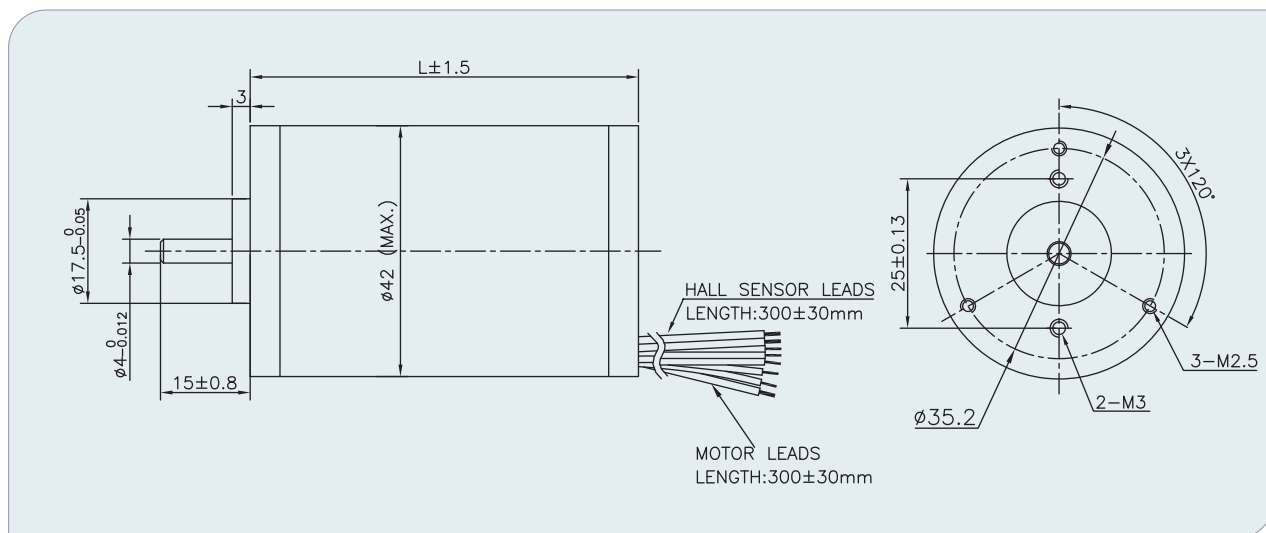

● Characteristic diagram

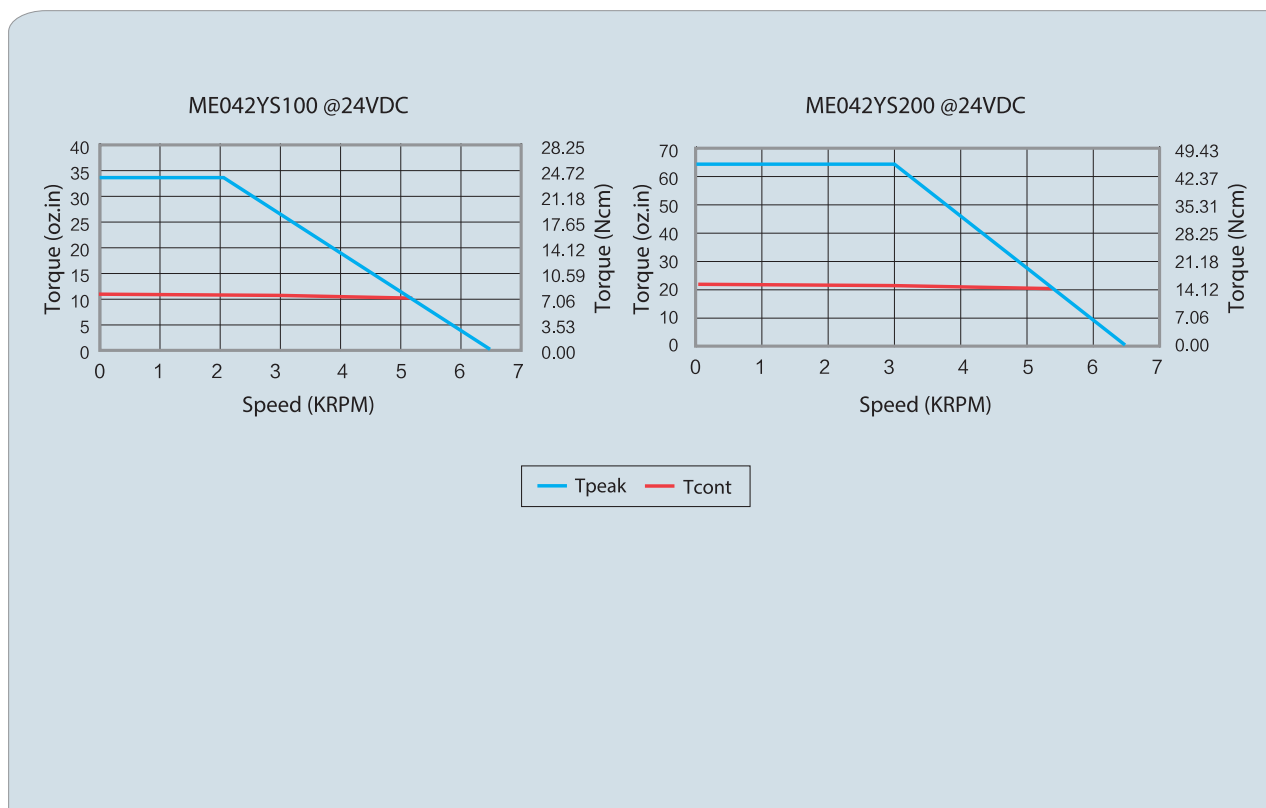

ME043AS

DC Brushless Motor



General information


- 4 poles with three phases
- 120/60 degree hall effect
- Seal ball bearing
- Neodymium magnet
- Aluminum housing
- Insulation class B, higher insulation class on request
- IP 55 available

Specifications


SPECIFICATION		Unit	ME043AS200	ME043AS300
Supply Voltage (reference)	(Vs)	Vdc	24	24
Rated Continuous Torque	(Tcr)	Nm	0.038	0.078
Rated Speed at Cont. Torque	(Scr)	rpm	2400	3000
Rated Continuous Stall Current	(Ics)	A	0.94	1.65
Rated Continuous Output Power	(Po,c)	W	9	25
Rated Peak Torque	(Tpr)	Nm	0.08	0.26
Rated Peak Current	(Ipr)	A	1.93	7.21
Torque Constant	(KT)	Nm/A	0.0523	0.0532
Voltage Constant	(KE)	V/krpm	5.47	5.57
Terminal Resistance	(Rmt)	Ω	9.74	3.34
Inductance	(L)	mH	2.66	1.13
Insulation Class			B	B
Rotor Inertia	(Jr)	Kg.m ²	5.60E-08	1.13E-07
Motor Weight	(Wm)	Kg	0.23	0.35
Motor Length	(Lm)	mm	47.4	66.4

ME043AS

● Mechanical

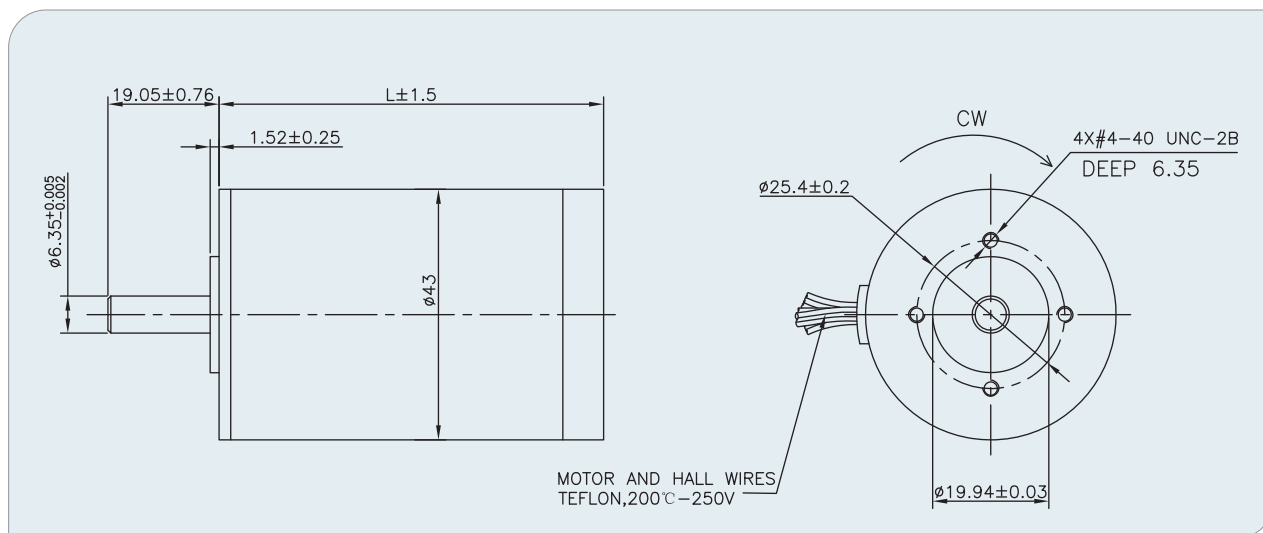

● Characteristic diagram

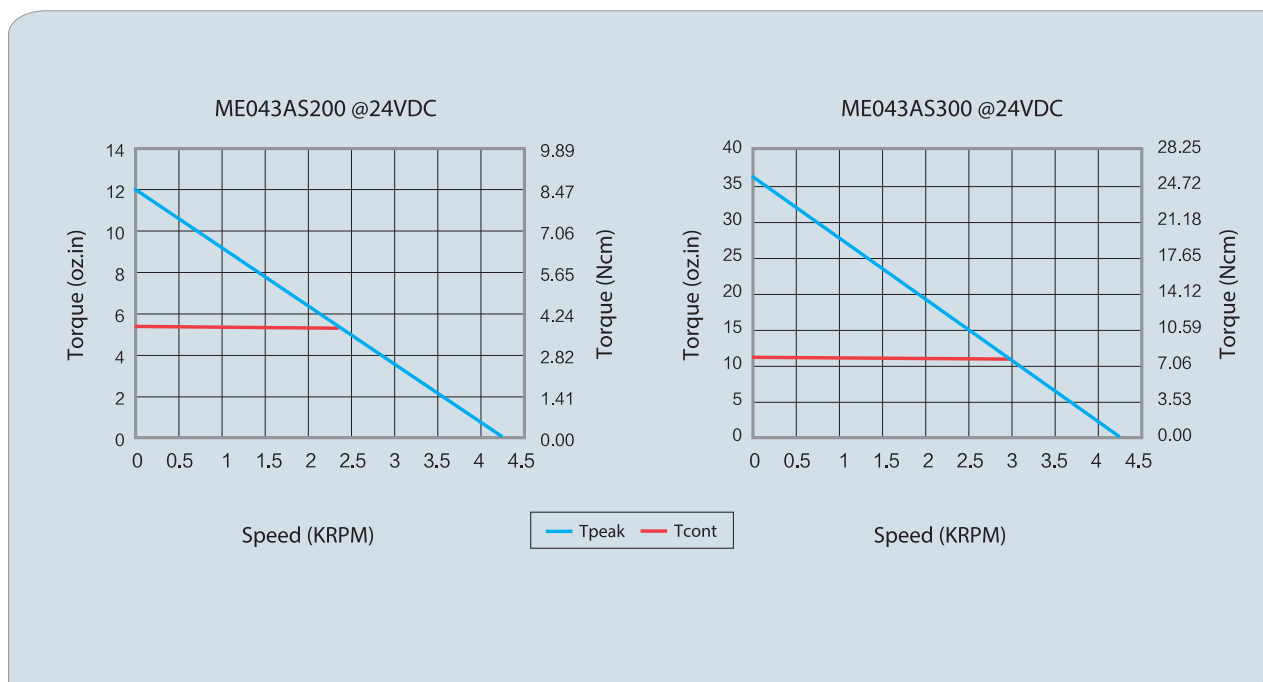

EF045AS

DC Brushless Motor



General information

- 16 poles with three phases external rotor
- Low torque ripple
- High inertia torque
- Compact design
- Insulation class B
- Application: Medical, Automation


Specifications

SPECIFICATION	Unit	EF045AS100	EF045AS200
Nominal voltage	V	12	24
No load speed	rpm	4500	6500
No load current (max.)	mA	300	300
Nominal speed	rpm	2940	5000
Nominal torque(max.continuous torque)	mNm	55.5	50
Nominal current(max.continuous current)	A	2.05	1.58
Nominal power	W	17	30
Stall torque	mNm	219	440
Stall current	A	10	4.8
Max.efficiency	%	72	72
Terminal resistance phase to phase	Ω	1.2	1.47
Terminal inductance phase to phase	mH	0.36	0.61
Torque constant	mNm/A	25.5	35.5
Rotor inertia	gcm ²	99	99
Insulation class		B	B
Weight of motor	g	75	80


EF045AS

DC Brushless Motor

● Mechanical

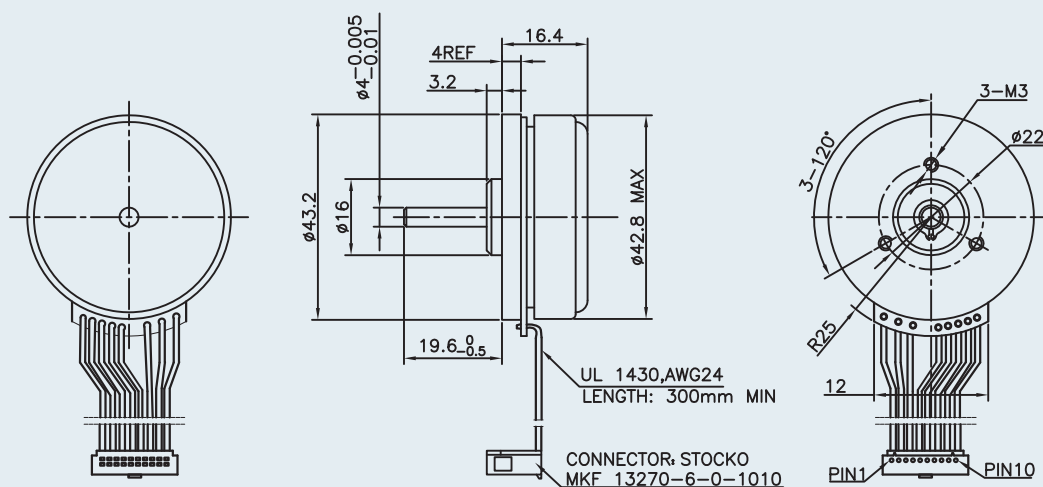

● Characteristic diagram

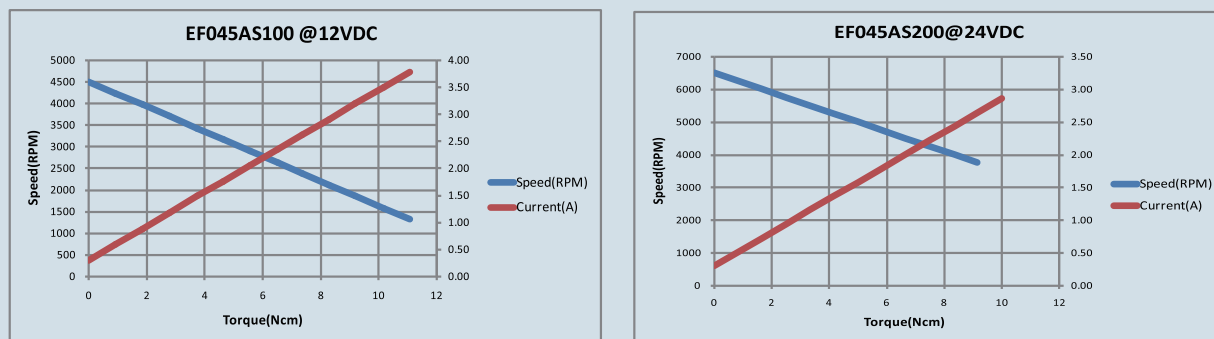

ME057AH

DC Brushless Motor



General information


- Shielded Ball Bearings
- NEMA 23 Flange Mounting
- Aluminum End Caps
- 8-Pole Rotor
- Hall Effect Feedback(120°elec)
- IP42 rated
- Low Cogging
- Encoder available

Specifications


SPECIFICATION	Unit	ME057AH100	ME057AH200	ME057AH300
Supply Voltage (reference)	(Vs) Vdc	170	170	170
Rated Continuous Torque	(Tcr) Nm	0.31	0.57	0.70
Rated Speed at Cont. Torque	(Scr) rpm	6000	6000	6000
Rated Continuous Stall Current	(Ics) A	3.73	5.49	7.43
Rated Continuous Output Power	(Po,c) W	196	361	440
Rated Peak Torque	(Tpr) Nm	1.20	2.20	2.68
Rated Peak Current	(Ipr) A	11.92	17.53	23.74
Torque Constant	(KT) Nm/A	0.1070	0.1338	0.1204
Voltage Constant	(KE) V/krpm	11.20	14.00	12.6
Terminal Resistance	(Rmt) Ω	2.09	1.16	0.59
Inductance	(L) mH	1.60	1.07	0.54
Insulation Class		F	F	F
Rotor Inertia	(Jr) Kg.m ²	1.34E-05	2.6E-05	3.95E-05
Motor Weight	(Wm) Kg	0.91	1.32	1.72
Motor Length	(Lm) mm	71.1	96.5	127.9

ME057AH

● Mechanical

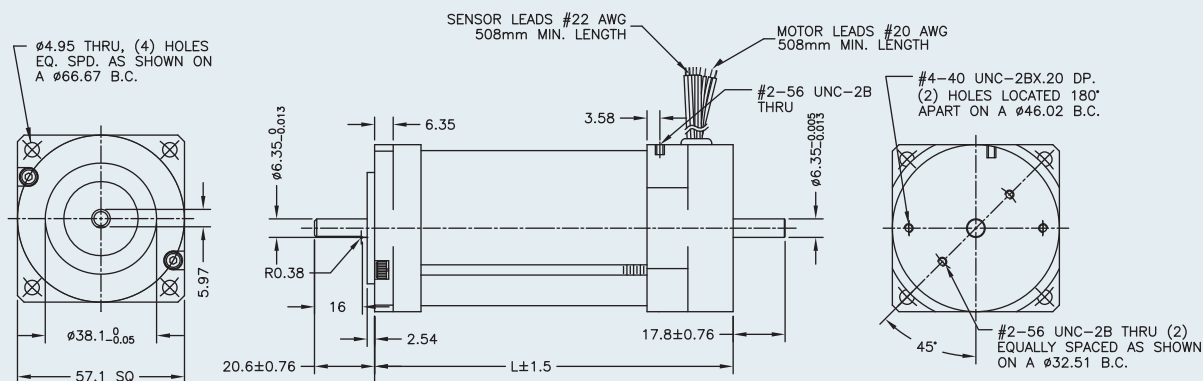

● Characteristic diagram

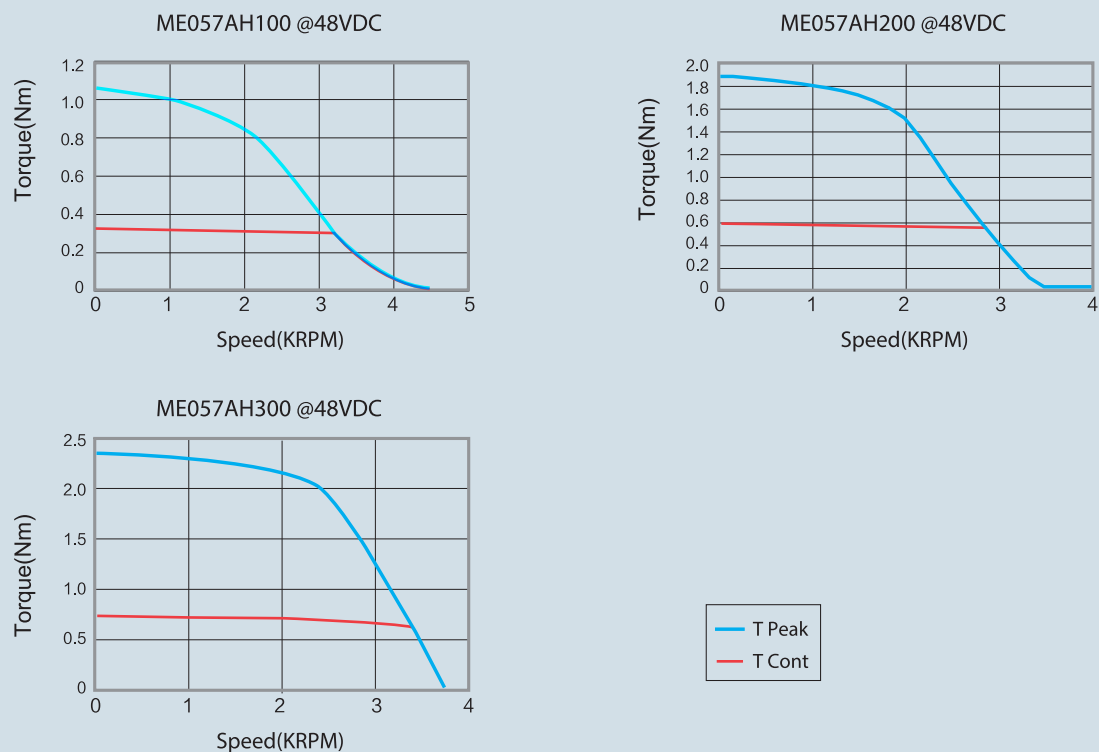

MB057GA

DC Brushless Motor



General information


- 4 poles with three phases
- Hall effect commutation (120 degree), skew rotor for low cogging
- Insulation class B, higher insulation class on request
- Bonded Neo Magnet
- NEMA 23 flange available
- UL certified

Specifications


SPECIFICATION		Unit	MB057GA100	MB057GA200	MB057GA300	MB057GA400
Supply Voltage (reference)	(Vs)	Vdc	60	60	60	60
Rated Continuous Torque	(Tcr)	Nm	0.11	0.20	0.31	0.40
Rated Speed at Cont. Torque	(Scr)	rpm	4750	5000	5000	5000
Rated Continuous Stall Current	(Ics)	A	1.68	3.21	4.71	6.46
Rated Continuous Output Power	(Po,c)	W	53	106	163	208
Rated Peak Torque	(Tpr)	Nm	0.42	0.81	1.17	1.36
Rated Peak Current	(Ipr)	A	5.05	9.62	14.13	17.61
Torque Constant	(KT)	Nm/A	0.0840	0.0839	0.0826	0.0772
Voltage Constant	(KE)	V/krpm	8.79	8.78	8.65	8.08
Terminal Resistance	(Rmt)	Ω	4.47	1.79	0.83	0.49
Inductance	(L)	mH	6.86	3.16	1.98	1.60
Insulation Class			B	B	B	B
Rotor Inertia	(Jr)	Kg.m ²	9.04E-06	1.69E-05	2.49E-05	3.28E-05
Motor Weight	(Wm)	Kg	0.50	0.75	1.00	1.25
Motor Length	(Lm)	mm	54	74	94	114

MB057GA

● Mechanical

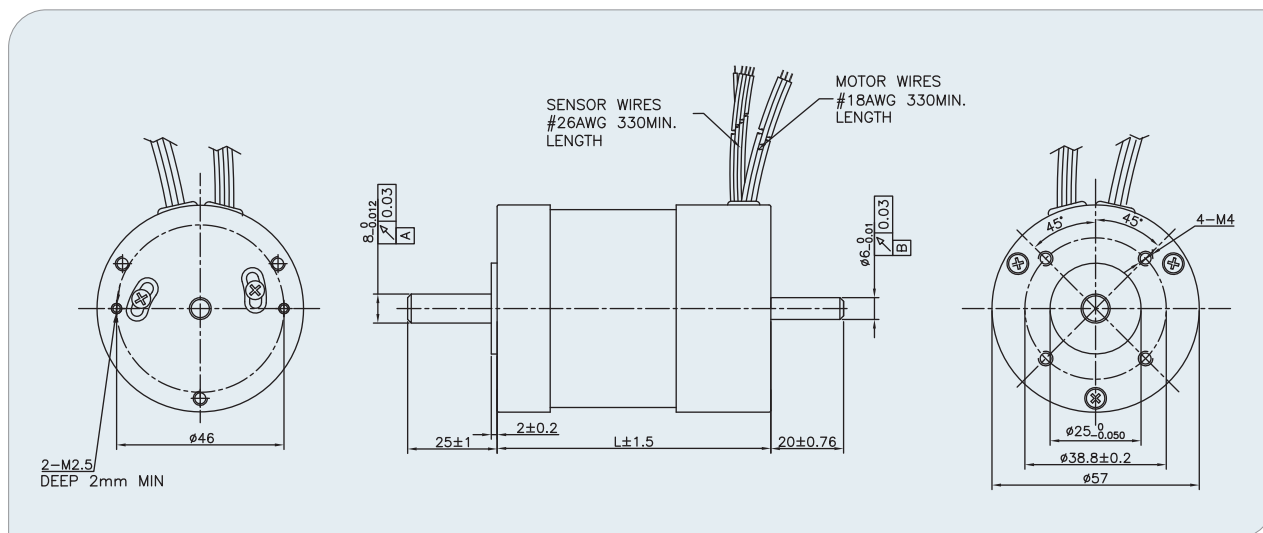

● Characteristic diagram

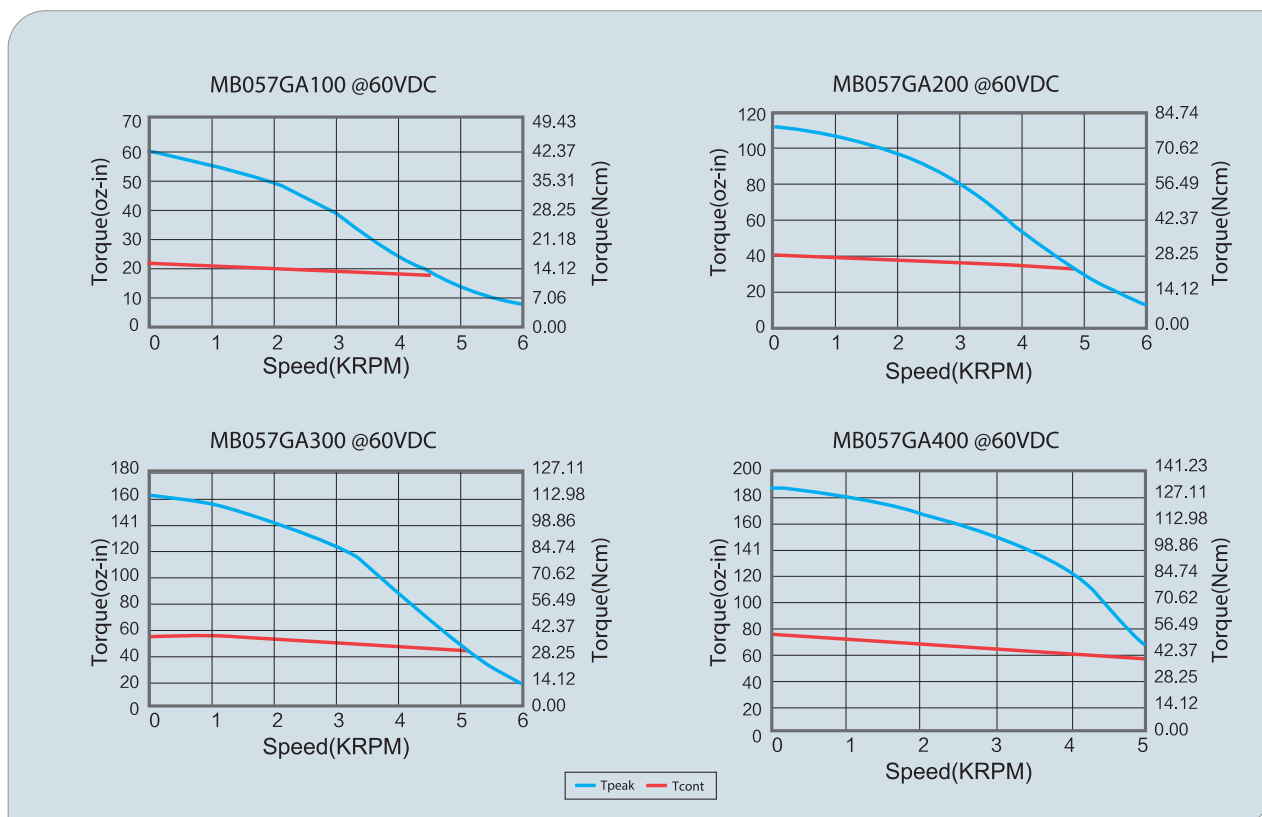

MDB56GS

DC Brushless Motor



General information


- NEMA 23 frame size
- 8 poles with three phases
- Insulation class B, higher insulation class on request
- Bonded Neo Magnet
- Higher Output Torque with economical design

Specifications





SPECIFICATION	Unit	MDB56GS100	MDB56GS200	MDB56GS300	MDB56GS400
Supply Voltage (reference)	(Vs) Vdc	36	36	36	36
Rated Continuous Torque	(Tcr) Nm	0.15	0.30	0.45	0.60
Rated Speed at Cont. Torque	(Scr) rpm	3000	3000	3000	3000
Rated Continuous Stall Current	(Ics) A	2.00	3.80	5.6	7.8
Rated Continuous Output Power	(Po,c) W	47	93	141	188
Rated Peak Torque	(Tpr) Nm	0.37	0.75	1.13	1.50
Rated Peak Current	(Ipr) A	4.50	9.00	13.5	18.5
Torque Constant	(KT) Nm/A	0.0833	0.0817	0.0834	0.0811
Voltage Constant	(KE) V/krpm	8.72	8.55	8.72	8.48
Terminal Resistance	(Rmt) Ω	2.25	1.2	0.82	0.59
Inductance	(L) mH	2.75	1.20	0.82	0.59
Insulation Class		B	B	B	B
Rotor Inertia	(Jr) Kg.m ²	1.23E-05	2.14E-05	3.12E-05	4.03E-05
Motor Weight	(Wm) Kg	0.50	0.80	1.10	1.40
Motor Length	(Lm) mm	56	76	96	116

MDB56GS

● Mechanical

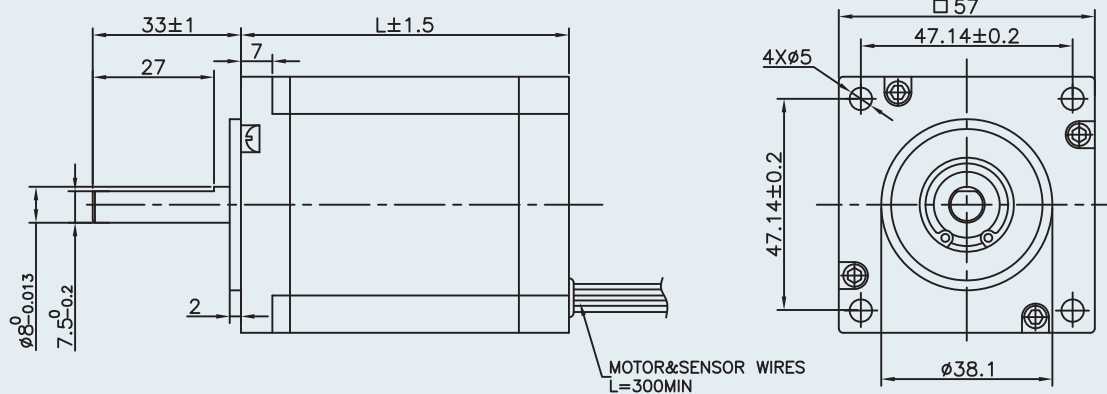

● Characteristic diagram

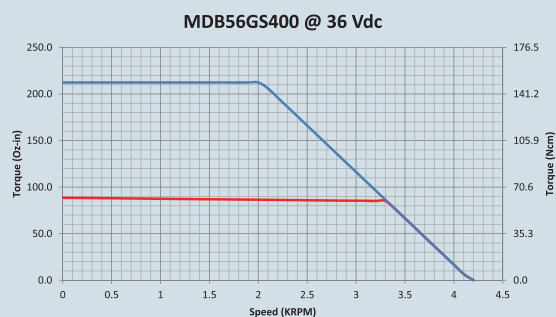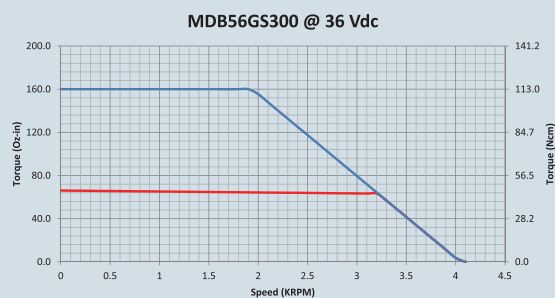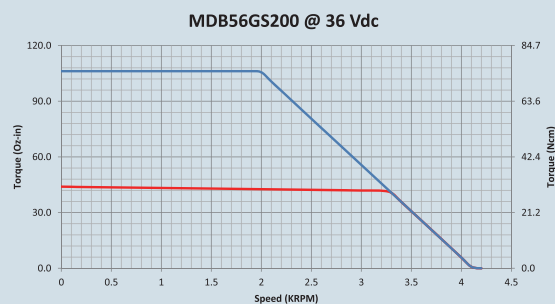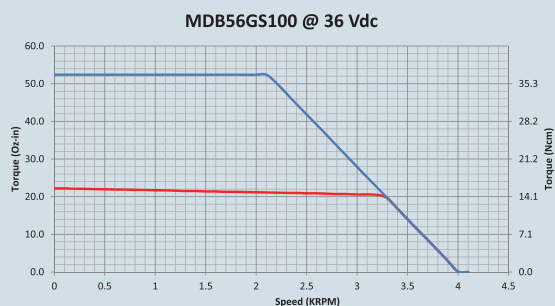

— Tpeak — Tcont

MB059AH

DC Brushless Motor

● General information

- 6 poles with three phases
- 9 slots design for automatic winding
- Insulation class B, higher insulation class on request
- Sintered Neo Magnet
- High efficiency and one of most powerful with this frame




● Specifications


SPECIFICATION		Unit	MB059AH100	MB059AH200	MB059AH300	MB059AH400
Supply Voltage (reference)	(Vs)	Vdc	24	24	24	24
Rated Continuous Torque	(Tcr)	Nm	0.23	0.37	0.47	0.60
Rated Speed at Cont. Torque	(Scr)	rpm	3500	3500	3500	3500
Rated Continuous Stall Current	(Ics)	A	5.0	8.0	9.4	13.6
Rated Continuous Output Power	(Po,c)	W	83	135	171	220
Rated Peak Torque	(Tpr)	Nm	0.69	1.11	1.41	1.80
Rated Peak Current	(Ipr)	A	15	24	28	40
Torque Constant	(KT)	Nm/A	0.0478	0.0478	0.0513	0.0500
Voltage Constant	(KE)	V/krpm	5.00	5.00	5.37	5.23
Terminal Resistance	(Rmt)	Ω	0.57	0.24	0.22	0.14
Inductance	(L)	mH	0.63	0.29	0.29	0.20
Insulation Class			B	B	B	B
Rotor Inertia	(Jr)	Kg.m ²	7.32E-06	1.05E-05	1.19E-05	1.73E-05
Motor Weight	(Wm)	Kg	0.52	0.65	0.72	0.95
Motor Length	(Lm)	mm	53.6	68.6	73.6	93.6

MB059AH

● Mechanical

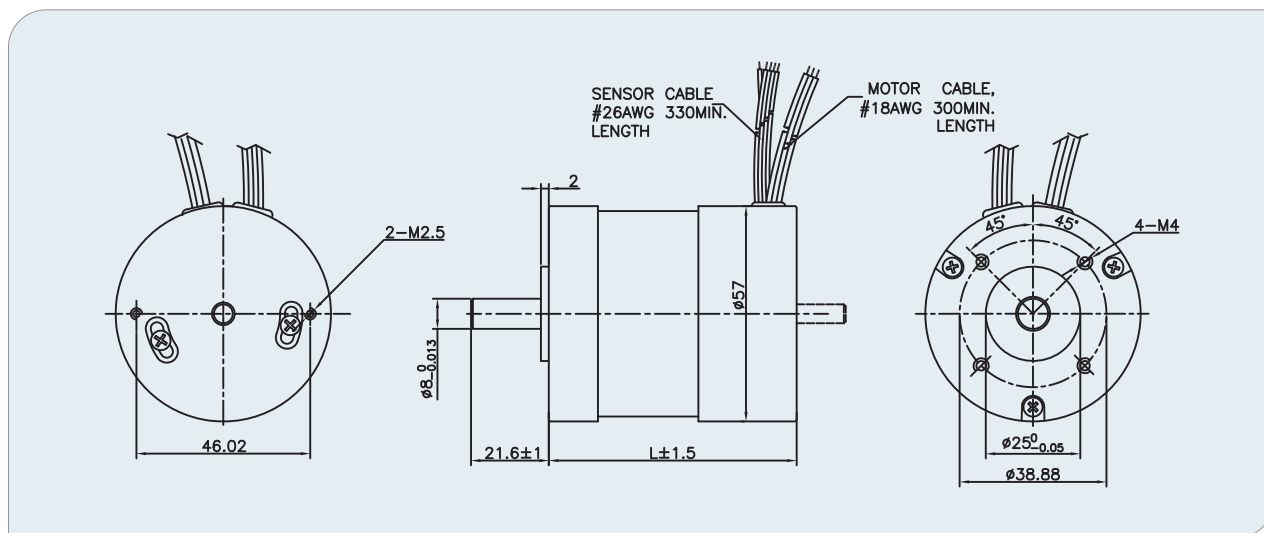

● Characteristic diagram

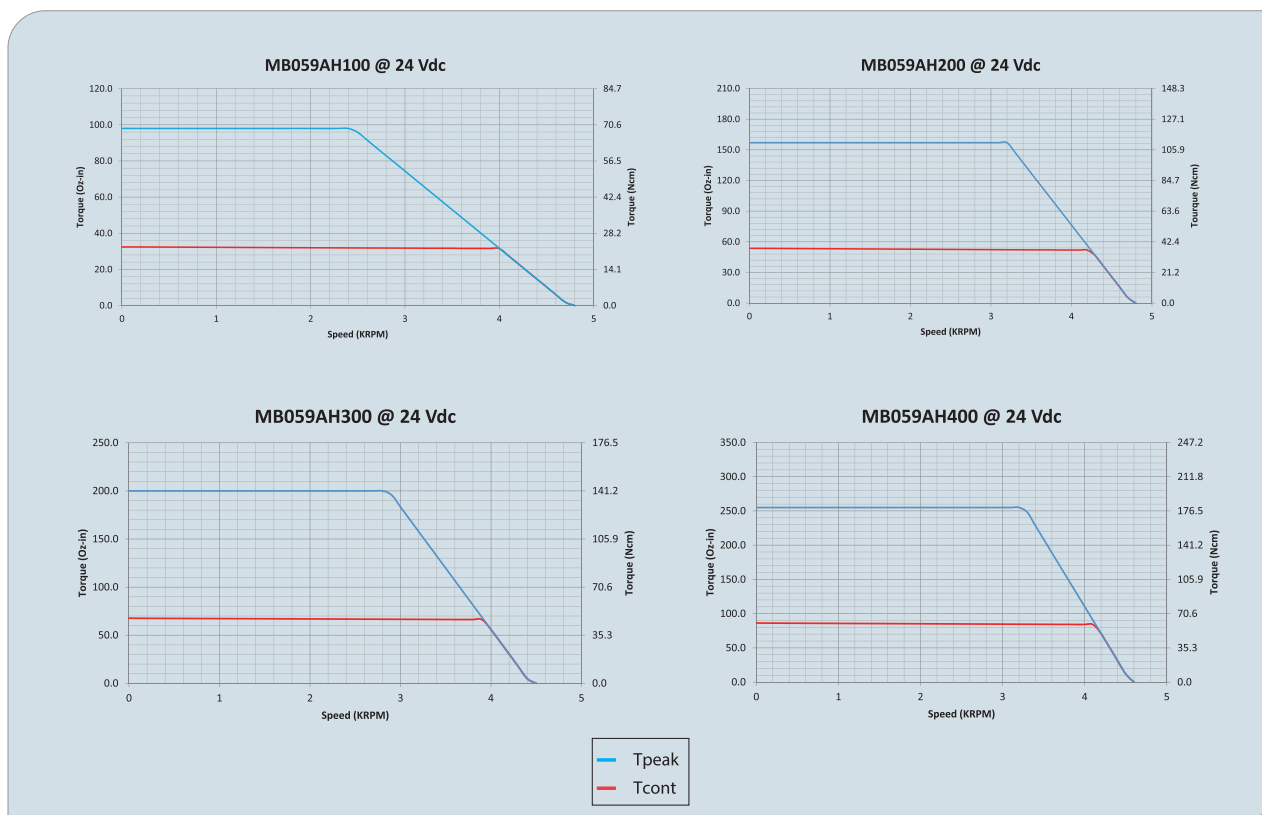

ME060AS

DC Brushless Motor



● General information


- 8 poles with three phases
- 12 slots design for low cogging
- Insulation class B, higher insulation class on request
- Multiple Lines of encoder available
- Sintered Neo Magnet

● Specifications


SPECIFICATION		Unit	ME060AS100	ME060AS200	ME060AS300
Supply Voltage (reference)	(Vs)	Vdc	24	24	24
Rated Continuous Torque	(Tcr)	Nm	0.25	0.50	0.75
Rated Speed at Cont. Torque	(Scr)	rpm	3000	3000	3000
Rated Continuous Stall Current	(Ics)	A	6.54	10.96	16.35
Rated Continuous Output Power	(Po,c)	W	80	162	242
Rated Peak Torque	(Tpr)	Nm	0.88	1.62	2.42
Rated Peak Current	(Ipr)	A	17.95	32.02	47.8
Torque Constant	(KT)	Nm/A	0.0539	0.0539	0.0539
Voltage Constant	(KE)	V/krpm	5.64	5.64	5.64
Terminal Resistance	(Rmt)	Ω	0.45	0.22	0.12
Inductance	(L)	mH	0.55	0.29	0.14
Insulation Class			B	B	B
Rotor Inertia	(Jr)	Kg.m ²	4.50E-05	8.50E-05	1.70E-04
Motor Weight	(Wm)	Kg	0.85	1.25	1.70
Motor Length	(Lm)	mm	78	99	120

ME060AS

● Mechanical

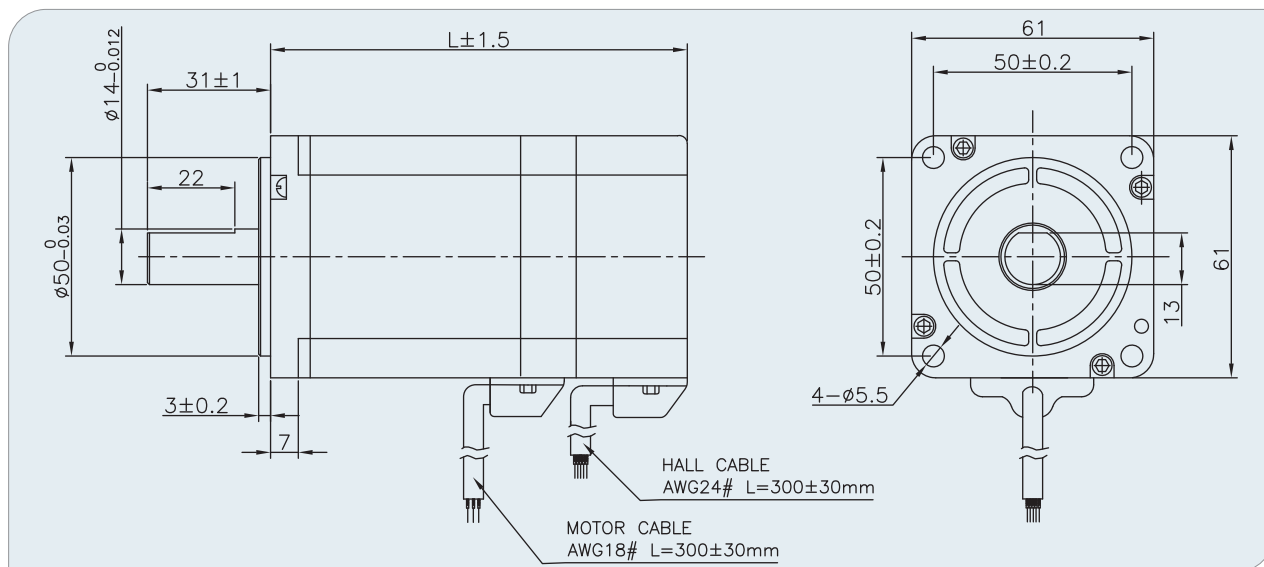

● Characteristic diagram

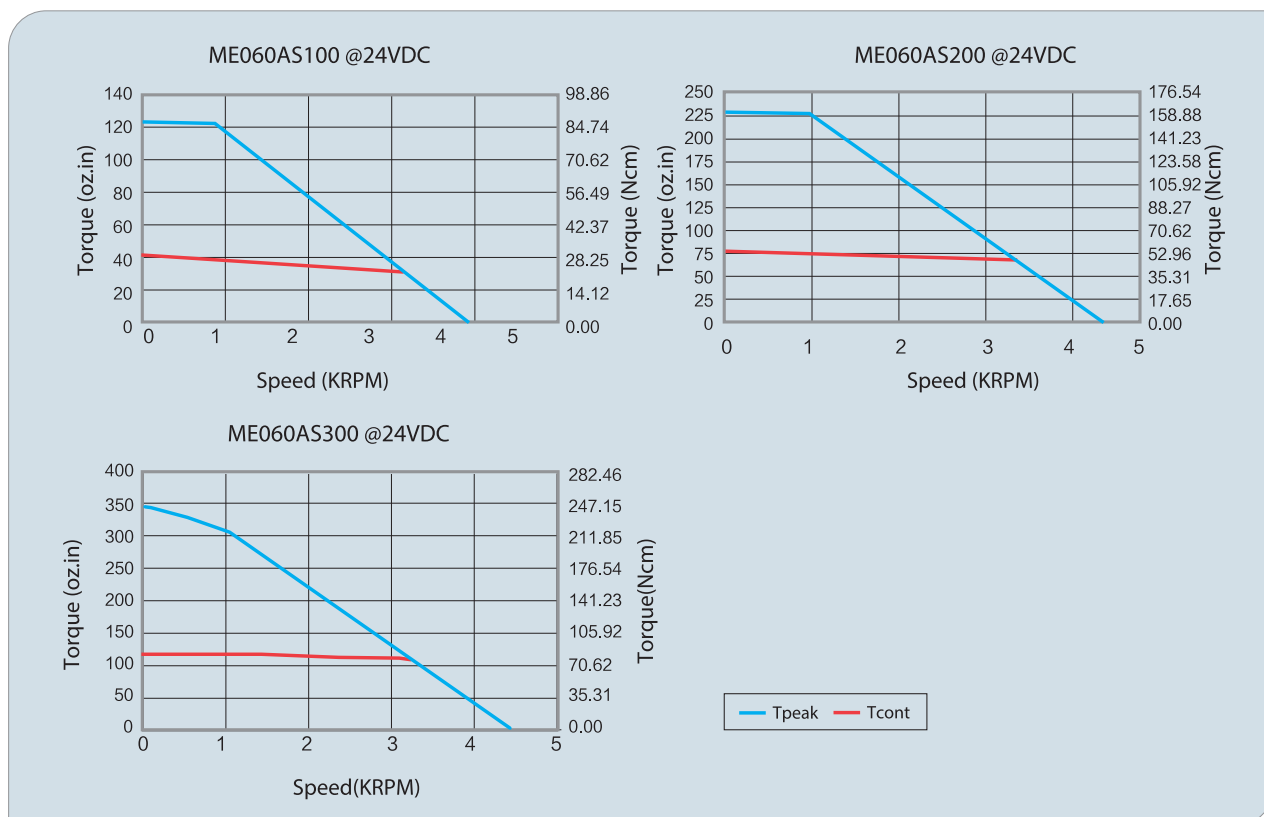

ME070AS

DC Brushless Motor



General information


- 8 poles with three phases
- 12 slots design for low cogging
- Insulation class B, higher insulation class on request
- Mutiple Lines of encoder available
- Sintered Neo Magnet

Specifications


SPECIFICATION	Unit	ME070AS100	ME070AS200	ME070AS300
Supply Voltage (reference)	(Vs) Vdc	48	48	48
Rated Continuous Torque	(Tcr) Nm	0.51	1.02	1.50
Rated Speed at Cont. Torque	(Scr) rpm	3000	3000	3000
Rated Continuous Stall Current	(Ics) A	5.40	10.47	15.41
Rated Continuous Output Power	(Po,c) W	159	319	470
Rated Peak Torque	(Tpr) Nm	1.50	3.00	4.50
Rated Peak Current	(Ipr) A	14.69	29.16	43.72
Torque Constant	(KT) Nm/A	0.1089	0.1089	0.1089
Voltage Constant	(KE) V/krpm	11.40	11.40	11.40
Terminal Resistance	(Rmt) Ω	0.78	0.28	0.19
Inductance	(L) mH	1.60	0.80	0.45
Insulation Class		B	B	B
Rotor Inertia	(Jr) Kg.m ²	3.70E-05	7.40E-05	1.10E-04
Motor Weight	(Wm) Kg	1.30	2.10	2.80
Motor Length	(Lm) mm	88	118	148

ME070AS

● Mechanical

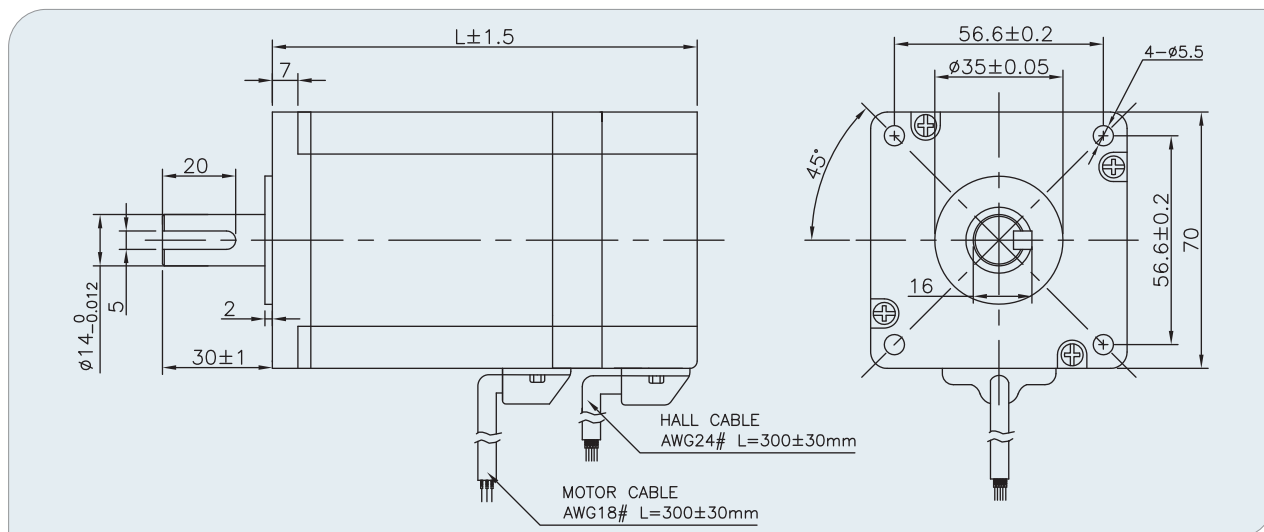

● Characteristic diagram

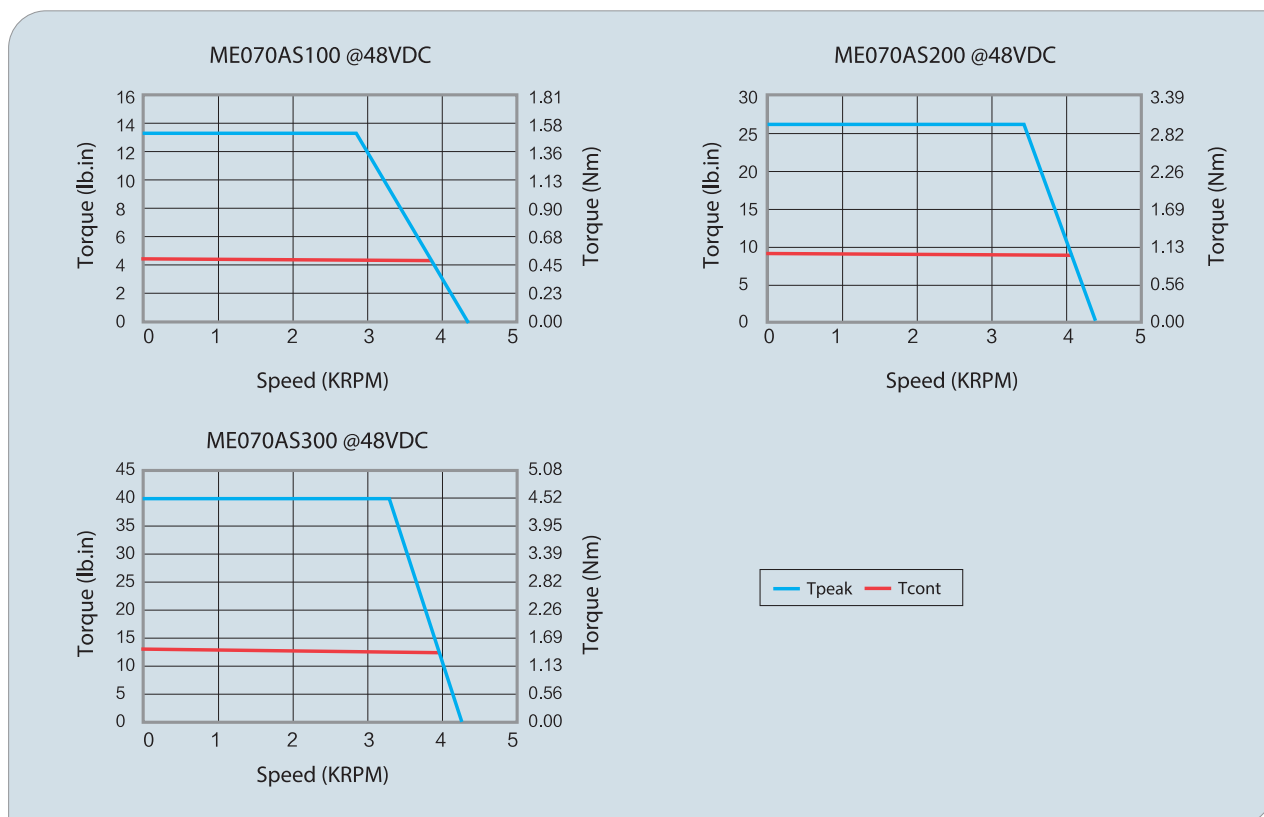

ME080AS

DC Brushless Motor



● General information


- 8 poles with three phases
- 15 slots distribution winding design for low cogging
- 6 slots for automatic winding
- Insulation class B, higher insulation on request
- Mutiple Lines of encoder available
- Sintered Neo Magnet
- Lower voltage available

● Specifications


SPECIFICATION	Unit	ME080AS100	ME080AS200	ME080AS300
Supply Voltage (reference)	(Vs) Vdc	310	310	310
Rated Continuous Torque	(Tcr) Nm	1.00	1.51	2.08
Rated Speed at Cont. Torque	(Scr) rpm	3000	3000	3000
Rated Continuous Stall Current	(Ics) A	1.87	2.69	3.69
Rated Continuous Output Power	(Po,c) W	316	474	653
Rated Peak Torque	(Tpr) Nm	3.04	4.97	6.24
Rated Peak Current	(Ipr) A	4.73	7.63	9.6
Torque Constant	(KT) Nm/A	0.7033	0.7033	0.7033
Voltage Constant	(KE) V/krpm	73.61	73.61	73.61
Terminal Resistance	(Rmt) Ω	13.00	8.6	5.3
Inductance	(L) mH	65.00	43.00	37.00
Insulation Class		B	B	B
Rotor Inertia	(Jr) Kg.m ²	6.00E-05	9.00E-05	1.20E-04
Motor Weight	(Wm) Kg	1.80	2.50	3.20
Motor Length	(Lm) mm	111	144	164

ME080AS

- *Mechanical*

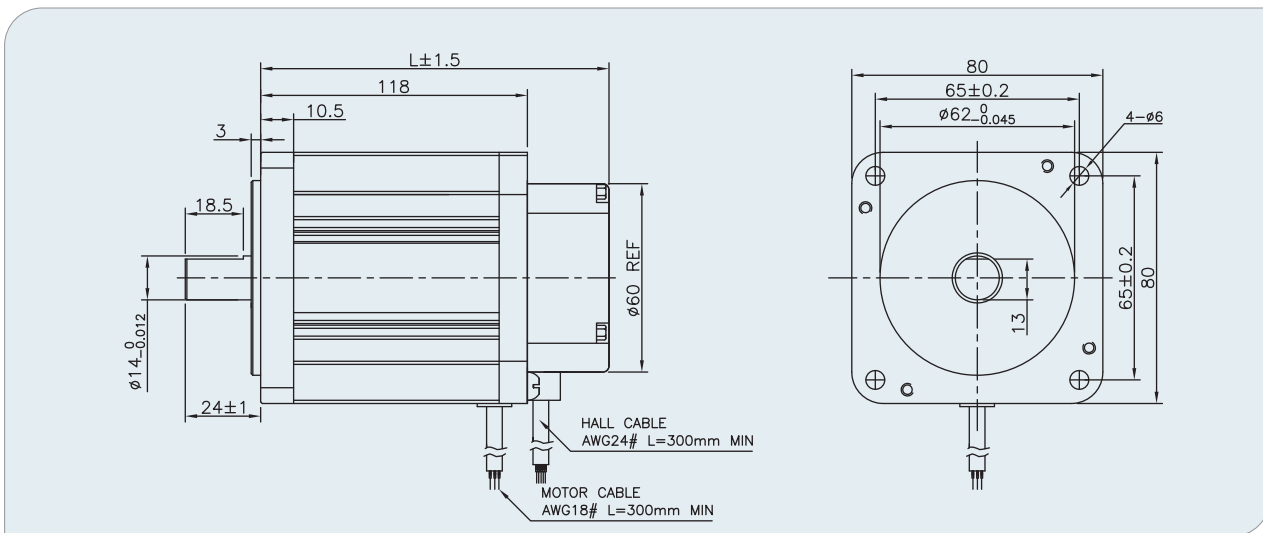

- *Characteristic diagram*

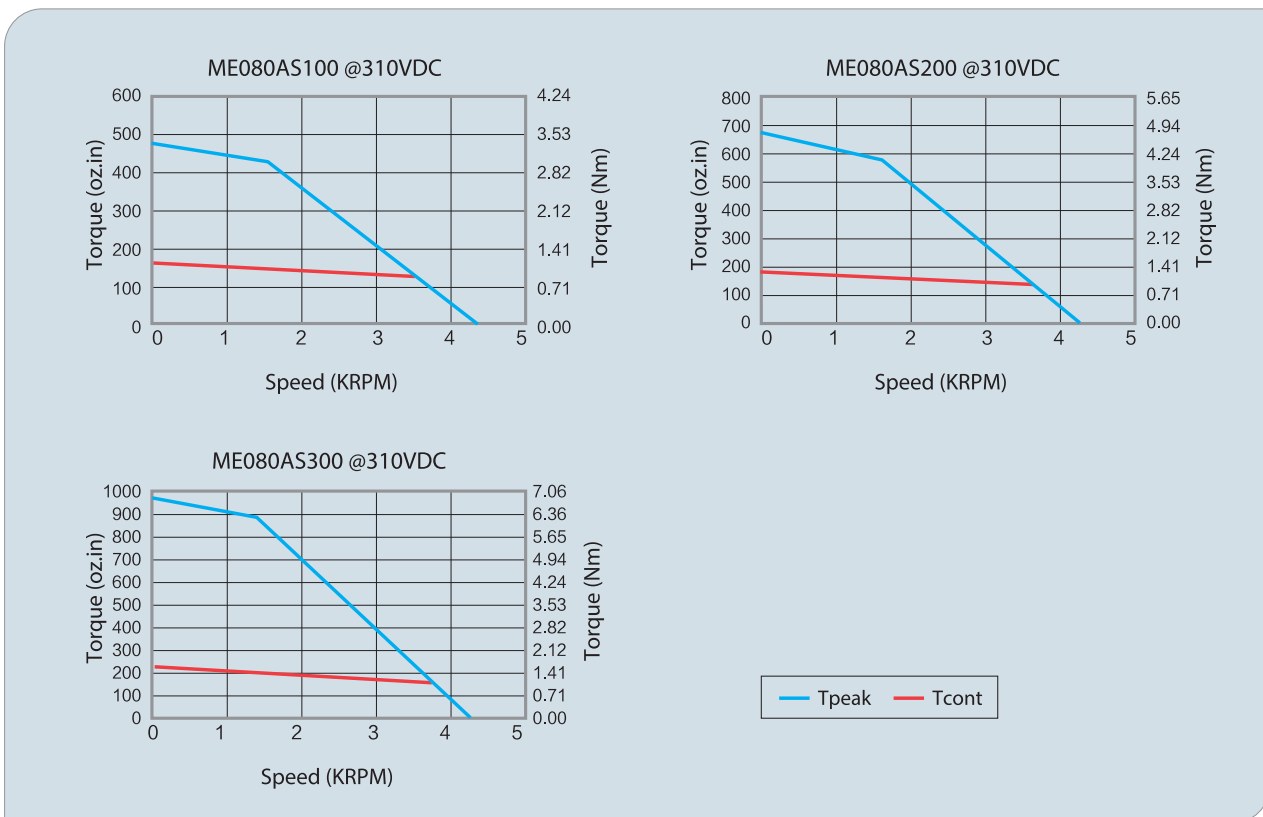

ME080RS

DC Brushless Motor



General information


- Integrated driver with continuous current 8A, peak current 16A
- 4 poles with three phases
- Insulation class B, higher insulation class on request
- Sintered Neo Magnet
- Suitable, economic and compact design for direct drive
- Speed adjustable with potentiometer

Specifications


SPECIFICATION		Unit	ME080RS100D	ME080RS200D	ME080RS210D	ME080RS300D
Voltage	(Vs)	Vdc	24	24	48	48
Resistance	(Rmt)	Ω	0.23	0.34	0.34	0.7
Inductance	(L)	mH	0.95	1.3	1.3	3.5
Nominal Speed	(Scr)	rpm	3000	1500	3000	1500
Nominal Torque	(Tcr)	Nm	0.5	1	0.8	1.5
Nominal Current	(Ic)	A	8	8	6.4	6
Nominal Power	(P)	W	157	157	250	235
Peak Torque	(Tp)	Nm	1	2	1.6	3
Peak Current	(Ip)	A	16	16	12.8	12
Voltage Constant RMS	(KE)	V/Krpm	4.25	8.5	9.4	17
Torque constant	(KT)	Nm/A	0.0625	0.125	0.125	0.25
Number of poles			4	4	4	4
Weight	(Wm)	Kg	1.2	1.8	1.8	2.5
L	(Lm)	mm	80	100	100	120

ME080RS

● Mechanical

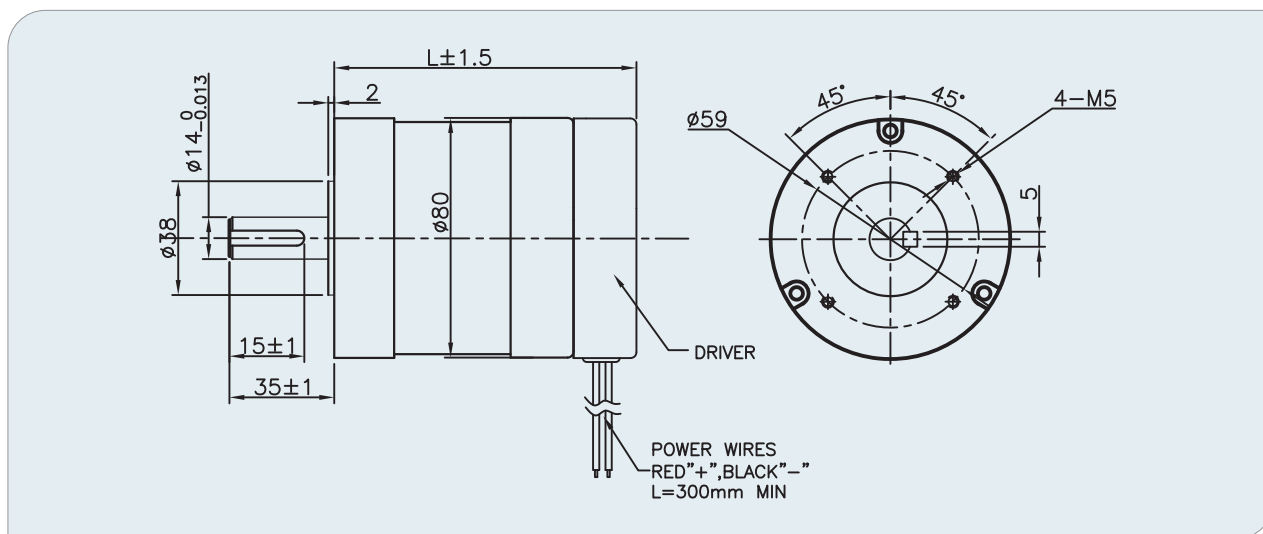

● Characteristic diagram

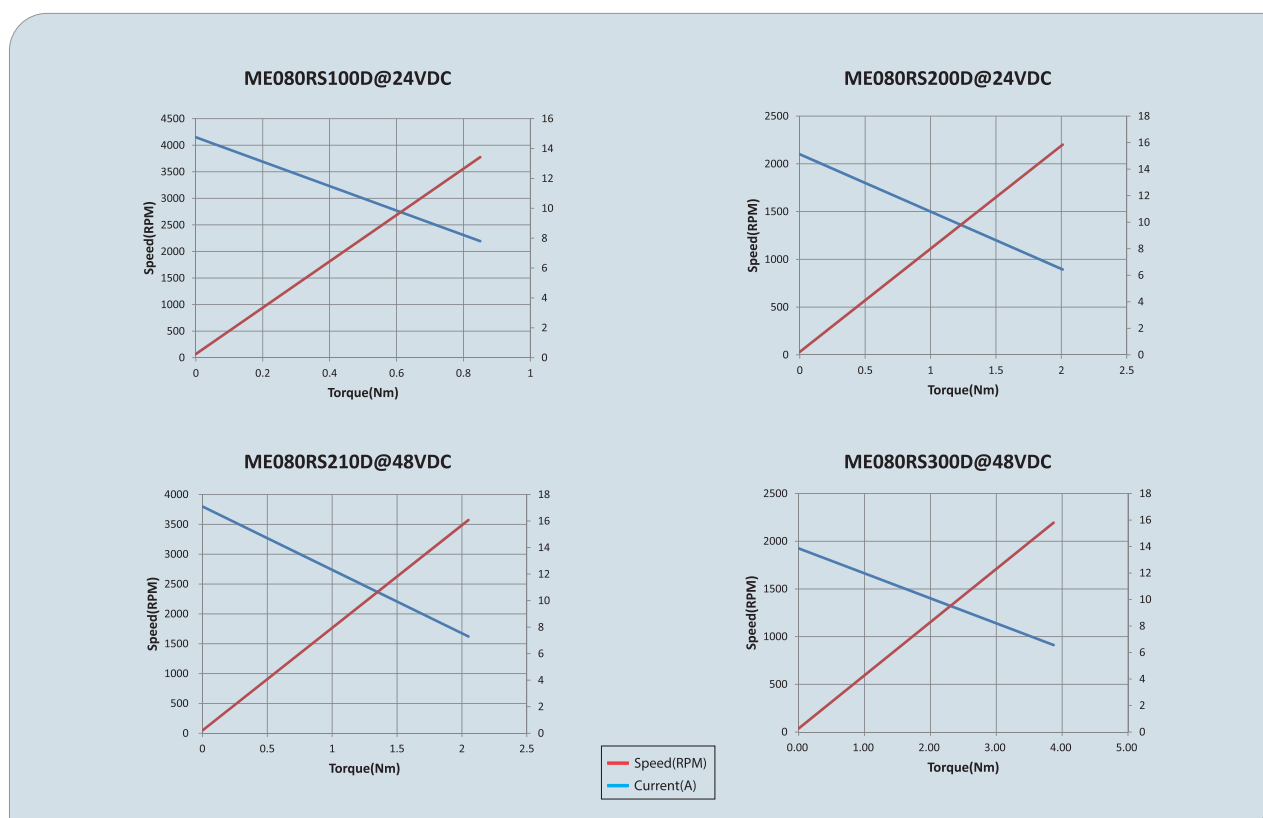

MB082GA

DC Brushless Motor



General information


- NEMA 34 frame size
- 8 poles with three phases
- Integrated Hall Effect Commutation
- Insulation class F,
- Bonded Neo Magnet
- UL Certified Structure

Specifications


SPECIFICATION	Unit	MB082GA100	MB082GA200	MB082GA300	MB082GA400	MB082GA500	MB082GA600
Supply Voltage (reference) (Vs)	Vdc	170	170	170	170	170	170
Rated Continuous Torque (Tcr)	Nm	0.60	0.88	1.27	1.51	1.68	2.00
Rated Speed at Cont. Torque (Scr)	rpm	5000	6000	6000	5000	4500	4000
Rated Continuous Stall Current (Ics)	A	3.00	6.7	8.26	11.8	12.1	11.8
Rated Continuous Output Power (Po,c)	W	314	554	798	791	792	840
Rated Peak Torque (Tpr)	Nm	1.91	2.82	3.89	4.59	5.13	6.11
Rated Peak Current (Ipr)	A	9.10	19.8	24.7	35.5	36.3	35.3
Torque Constant (KT)	Nm/A	0.2280	0.1430	0.1576	0.1399	0.1586	0.1882
Voltage constant (KE)	V /krpm	23.90	15.00	16.50	14.64	16.6	19.7
Terminal Resistance (Rmt)	Ω	2.01	0.43	0.37	0.22	0.22	0.35
Inductance (L)	mH	8.46	1.89	1.70	1.06	1.08	1.38
Insulation Class		F	F	F	F	F	F
Rotor Inertia (Jr)	kg m ²	6.78E-05	1.02E-04	1.24E-04	1.58E-04	2.03E-04	2.37E-04
Motor Weight (Wm)	Kg	1.50	2.00	2.50	3.04	3.54	4.08
Motor Length (Lm)	mm	78	90	102	115	128	141

MB082GA

Mechanical

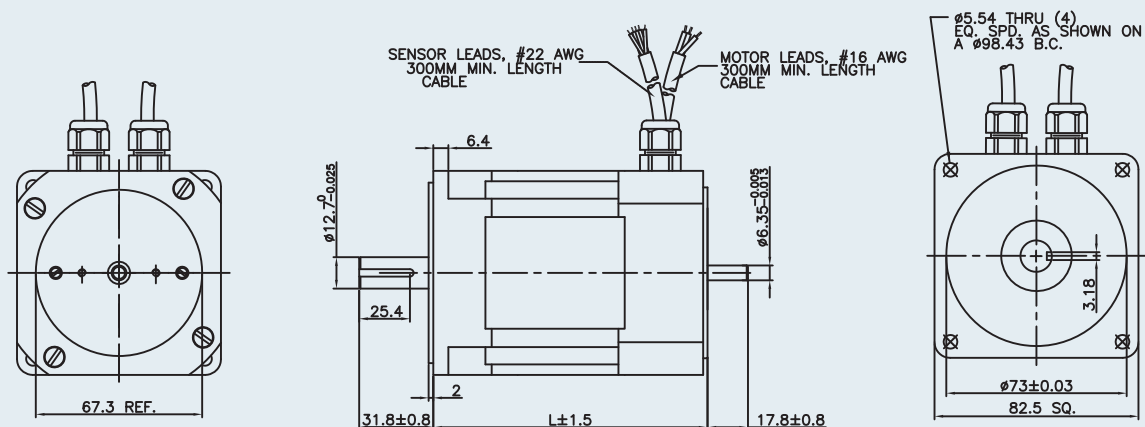

Characteristic diagram

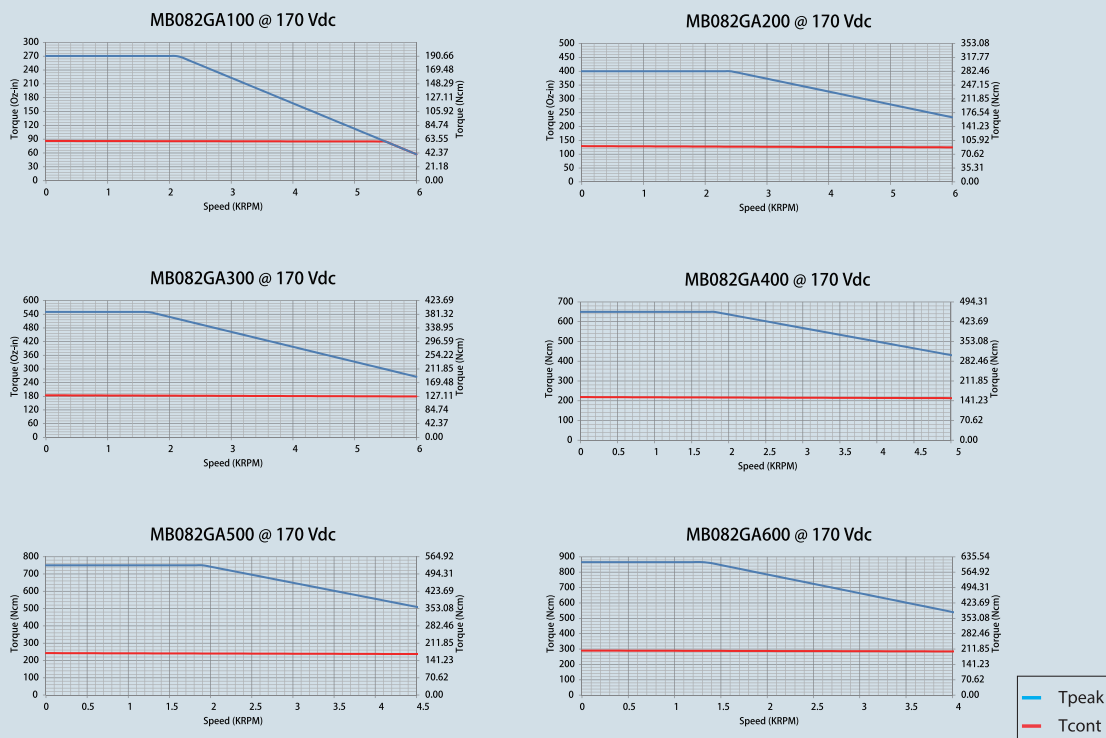

ME086AS

DC Brushless Motor



General information


- 8 poles with three phases
- Servo application
- Insulation class F
- Mutiple Lines of encoder available
- IP 65 class

Specifications


SPECIFICATION	Unit	ME086AS100	ME086AS200	ME086AS300
Supply Voltage (reference)	(Vs) Vdc	310	310	310
Rated Continuous Torque	(Tcr) Nm	0.70	1.41	2.11
Rated Speed at Cont. Torque	(Scr) rpm	3000	3000	3000
Rated Continuous Stall Current	(Ics) A	1.35	2.68	4.03
Rated Continuous Output Power	(Po,c) W	221	441	663
Rated Peak Torque	(Tpr) Nm	2.85	5.67	8.52
Rated Peak Current	(Ipr) A	4.34	8.64	13.00
Torque Constant	(KT) Nm/A	0.7059	0.7059	0.7059
Voltage Constant	(KE) V/krpm	73.88	73.88	73.88
Terminal Resistance	(Rmt) Ω	13.50	7.00	4.40
Inductance	(L) mH	42.00	20.00	14.50
Insulation Class		F	F	F
Rotor Inertia	(Jr) Kg.m ²	8.00E-05	1.60E-04	2.40E-04
Motor Weight	(Wm) Kg	1.85	2.60	4.00
Motor Length	(Lm) mm	135	162	189

ME086AS

● Mechanical

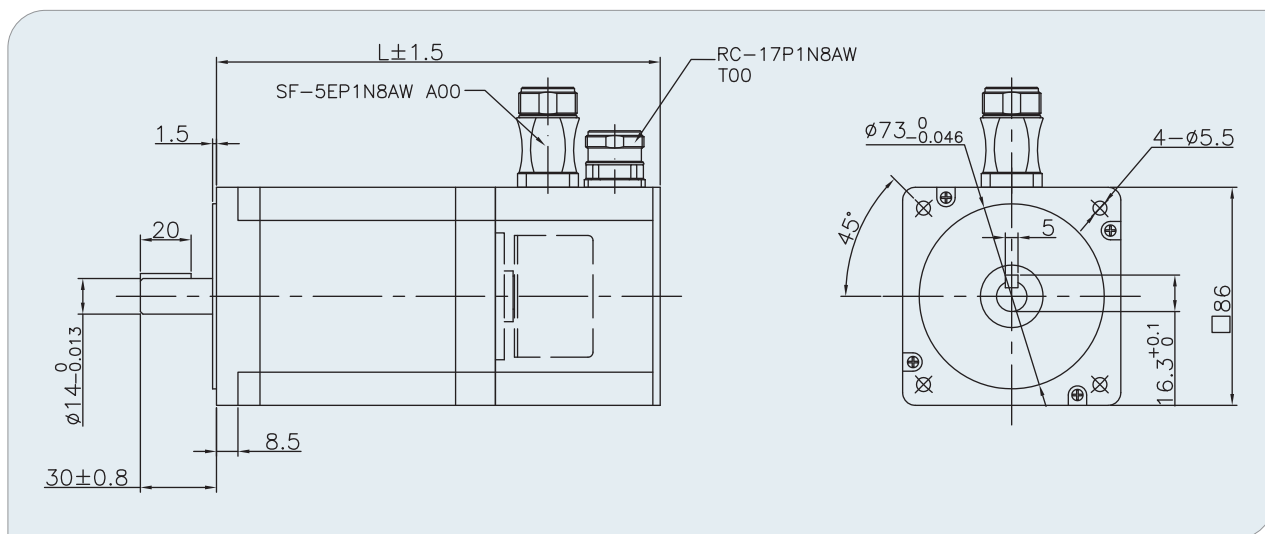

● Characteristic diagram

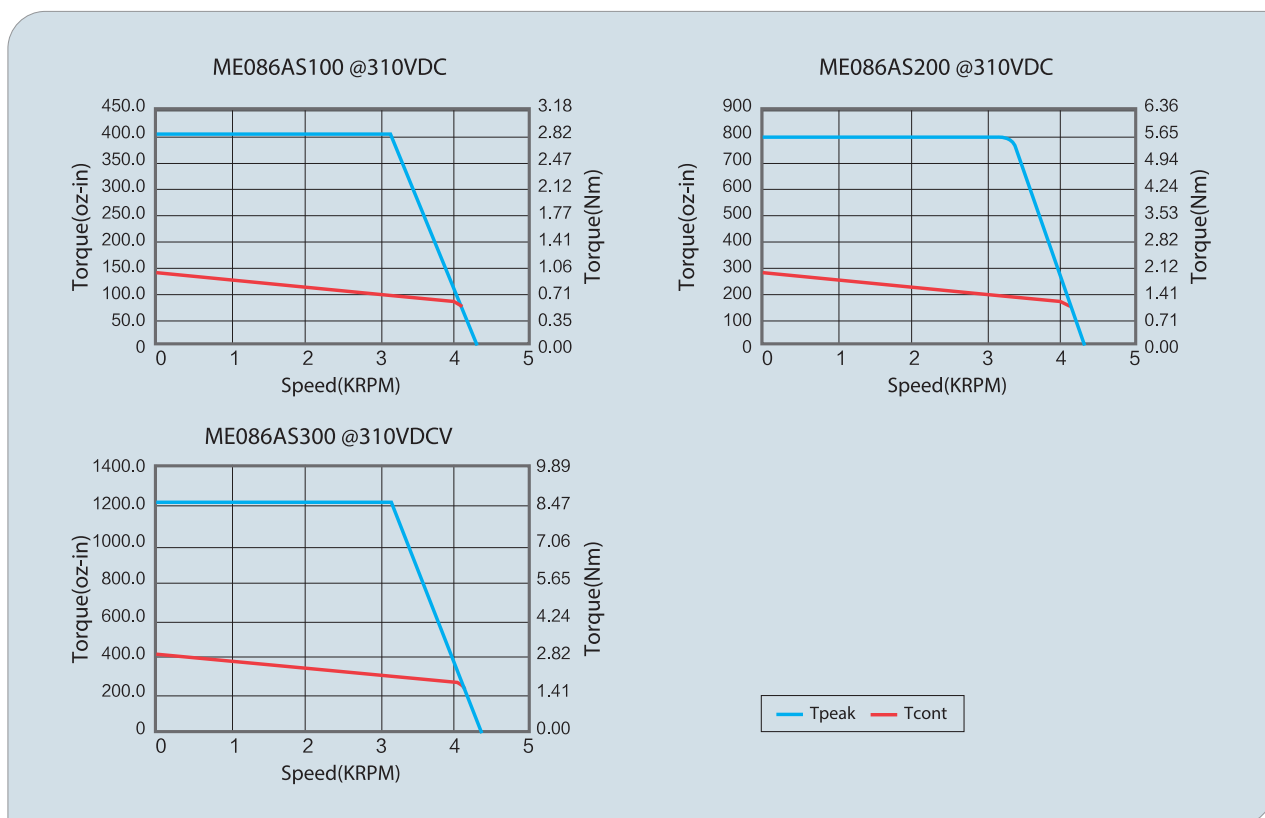

ME110AS

DC Brushless Motor



General information


- 8 poles with three phases
- 18 slots design for low cogging
- Insulation class B, higher insulation class on request
- Encoder available
- Sintered Neo Magnet
- IP65 class available

Specifications


SPECIFICATION		Unit	ME110AS100	ME110AS200	ME110AS300
Supply Voltage (reference)	(Vs)	Vdc	310	310	310
Rated Continuous Torque	(Tcr)	Nm	2.06	4.04	6.06
Rated Speed at Cont. Torque	(Scr)	rpm	3000	3000	3000
Rated Continuous Stall Current	(Ics)	A	3.25	6.15	9.12
Rated Continuous Output Power	(Po,c)	W	647	1267	1903
Rated Peak Torque	(Tpr)	Nm	6.00	12.38	18.51
Rated Peak Current	(Ipr)	A	8.99	18.41	27.43
Torque Constant	(KT)	Nm/A	0.7059	0.7059	0.7059
Voltage Constant	(KE)	V/krpm	73.88	73.88	73.88
Terminal Resistance	(Rmt)	Ω	2.50	1.3	0.9
Inductance	(L)	mH	10.00	5.00	3.50
Insulation Class			B	B	B
Rotor Inertia	(Jr)	Kg.m ²	3.50E-04	5.40E-04	7.60E-04
Motor Weight	(Wm)	Kg	3.50	4.50	5.50
Motor Length	(Lm)	mm	125	152	180

ME110AS

● Mechanical

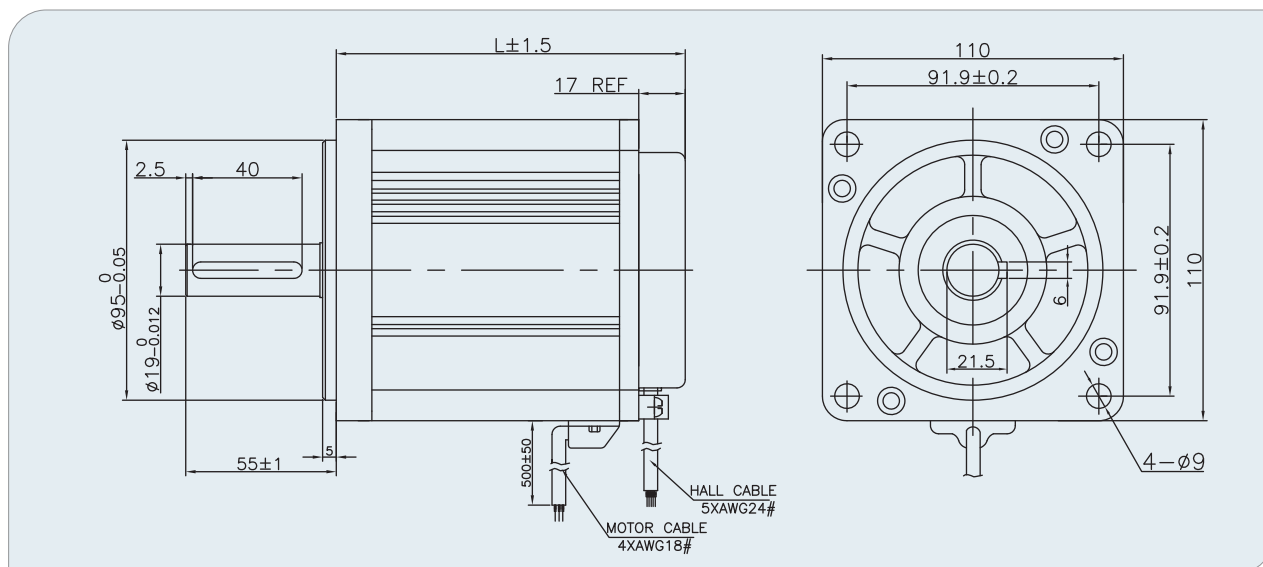

● Characteristic diagram

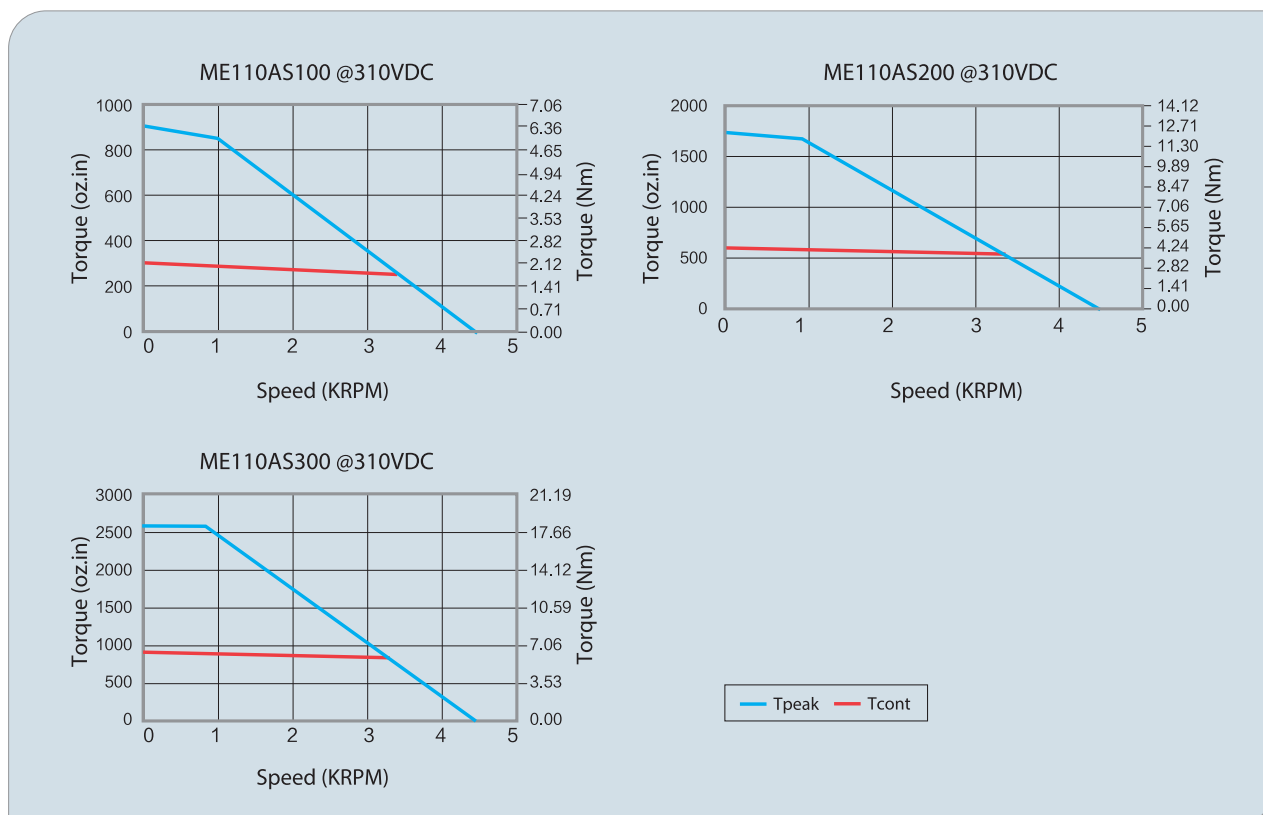

ME130AS

DC Brushless Motor



● General information


- 8 poles with three phases
- 24 slots design for low cogging
- Insulation class B, higher insulation class on request
- Sintered Neo Magnet
- Aluminum housing
- Nema mounting frame for AC motor replacement available.

● Specifications


SPECIFICATION		Unit	ME130AS100	ME130AS200	ME130AS300
Supply Voltage (reference)	(Vs)	Vdc	48	48	48
Rated Continuous Torque	(Tcr)	Nm	2.00	4.00	6.00
Rated Speed at Cont. Torque	(Scr)	rpm	1500	1500	1500
Rated Continuous Stall Current	(Ics)	A	9.00	17	25
Rated Continuous Output Power	(Po,c)	W	315	629	942
Rated Peak Torque	(Tpr)	Nm	6.00	12.00	18.00
Rated Peak Current	(Ipr)	A	25.00	48	72
Torque Constant	(KT)	Nm/A	0.2567	0.2567	0.2567
Voltage Constant	(KE)	V/krpm	26.87	26.87	26.87
Terminal Resistance	(Rmt)	Ω	0.24	0.09	0.05
Inductance	(L)	mH	1.37	0.54	0.29
Insulation Class			B	B	B
Rotor Inertia	(Jr)	Kg.m ²	5.80E-04	1.00E-03	1.36E-03
Motor Weight	(Wm)	Kg	5.20	7.60	10.00
Motor Length	(Lm)	mm	105	135	165

ME130AS

● Mechanical

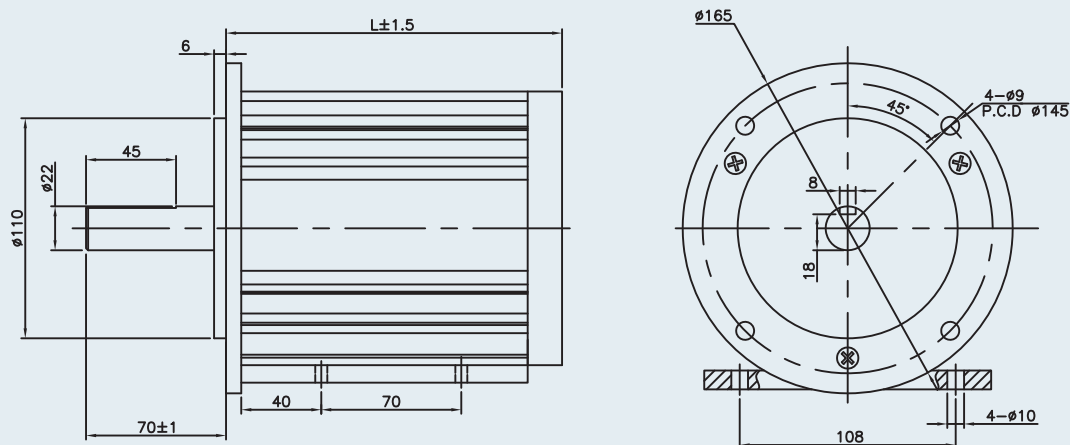

● Characteristic diagram

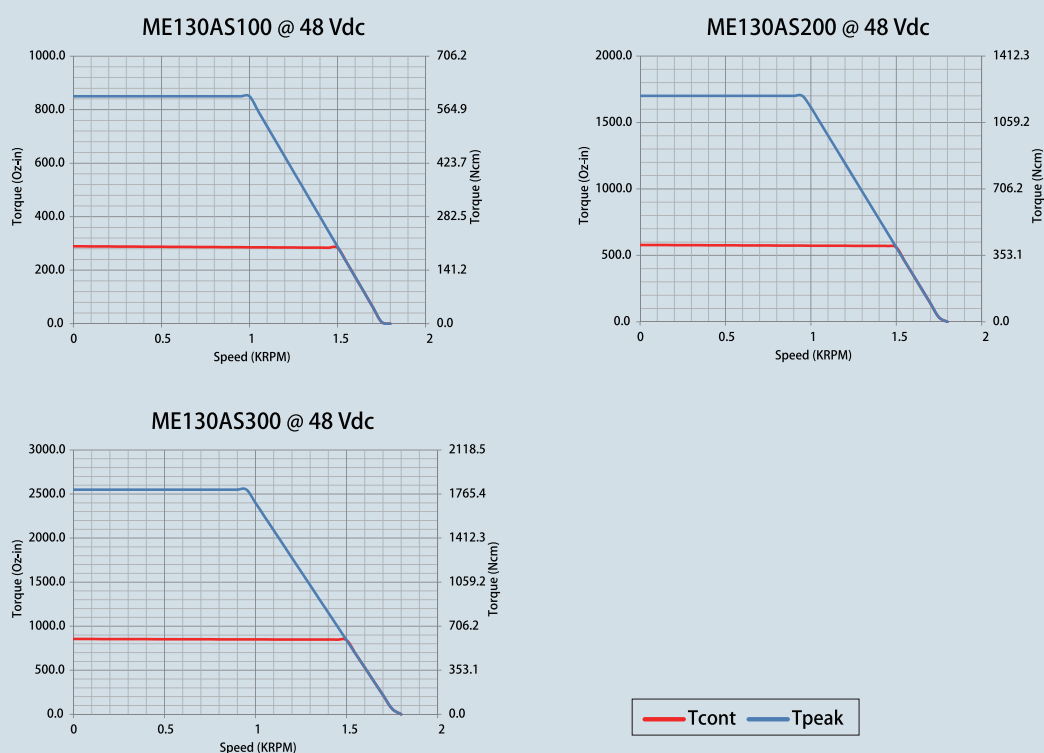

SLS

DC Brushless Motor

General information

- Slotless and brushless DC motor
- High Speed and high performance
- 0.2mm thickness silicon steel lamination
- 2 poles and 4 poles stator with 3 phases
- Driver available



Specifications

Specifications		SLS16AS100	SLS20AS100	SLS24AS100
Voltage	VDC	32	32	15
Rated Output Power	W	80	180	150
No-load Speed	RPM	56700	56000	10000
No-load Current	A	0.1	0.12	0.20
Rated Speed	RPM	50000	50000	8000
Rated Torque	mNm	16	30	150
Stall Torque	mNm	320	120	500
Stall Current	A	12	5	12.0
Max. Efficiency		85%	90%	0.85
Phase Resistance	Ohms	2.6	2.35	0.3
Phase Inductance	mH	0.018	0.014	0.018
Speed Constant	RPM/V	1428	1750	690
Torque Constant	mNm/A	6.4	14	15
Rotor Inertia	g.cm ²	1.6	3	10
Number Of Phases		3	3	3
Number Of Poles		2	2	4
Weight	g	37	50	140
Length	mm	42	40	59.5