

66 FRAME

PMD/BLDC GEAR MOTOR

General information


- Encoder available : 2 PPR or 4 PPR.
- Epoxy coating on the surface.
- Protection class IP 65.
- Operating temperature -40℃ ~ +80℃.
- With protective vent valve to reduce condensation.



Specification

Model	Voltage (v)	No Load		Rated Load		Torque (N.m)	Ratio	Stage	Power (W)	Length (mm)
		Current (A)	Speed (rpm)	Current (A)	Speed (rpm)					
MB/ME057FG100-PL0018	24	0.75	201	4.03	167	2.9	18	2	51	185
MB/ME057FG100-PL0029	24	0.75	125	4.03	103	4.7	29			
MB/ME057FG100-PL0036	24	0.75	100	4.03	83	5.8	36			
MB/ME057FG100-PL0079	24	0.83	46	4.03	38	11.5	79	3	46	185
MB/ME057FG100-PL0150	24	0.83	24	4.03	20	21.9	150			
MB/ME057FG100-PL0236	24	0.83	15	4.03	13	34.5	236			
MB/ME057FG100-PL0408	24	0.93	9	4.03	7	53	408	4	41	198
MB/ME057FG100-PL0531	24	0.93	7	4.03	6	69	531			
MB/ME057FG100-PL0837	24	0.93	4	4.03	4	108.8	837			


Mechanical

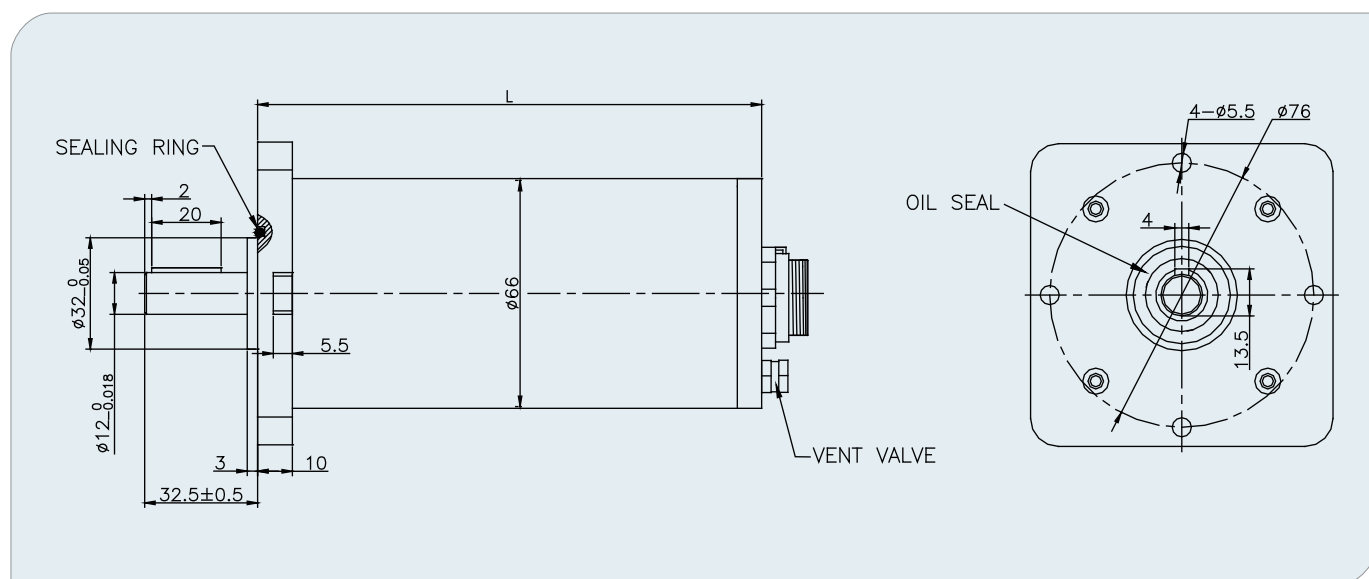

82 FRAME PMDC/BLDC GEAR MOTOR

General information


- Encoder available : 2 PPR or 4 PPR.
- Epoxy coating on the surface.
- Protection class IP 65.
- Operating temperature -40℃ ~ +80℃.
- With protective vent valve to reduce condensation.

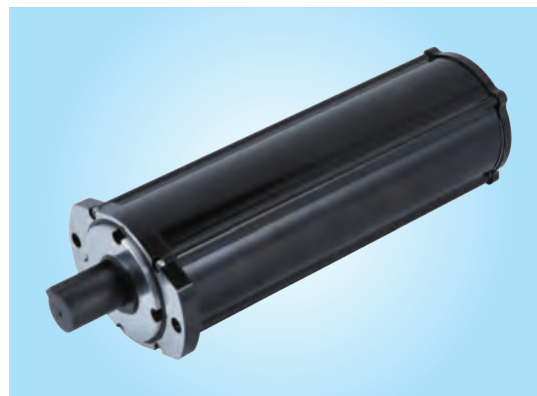

Specification

Model	Voltage (v)	No Load		Rated Load		Torque (N.m)	Ratio	Stage	Power (W)	Length (mm)
		Current (A)	Speed (rpm)	Current (A)	Speed (rpm)					
MB/ME076FG100-PL0018	24	1.39	201	7.48	167	5.8	18	2	102	215
MB/ME076FG100-PL0029	24	1.39	125	7.48	103	9.4	29			
MB/ME076FG100-PL0035	24	1.39	103	7.48	86	11.3	35			
MB/ME076FG100-PL0079	24	1.54	46	7.48	38	23.1	79	3	92	230
MB/ME076FG100-PL0150	24	1.54	24	7.48	20	43.8	150			
MB/ME076FG100-PL0236	24	1.54	15	7.48	13	68.9	236			
MB/ME076FG100-PL0531	24	1.73	7	7.48	6	138.1	531	4	82	260
MB/ME076FG100-PL0836	24	1.73	4	7.48	4	217.4	836			

Mechanical

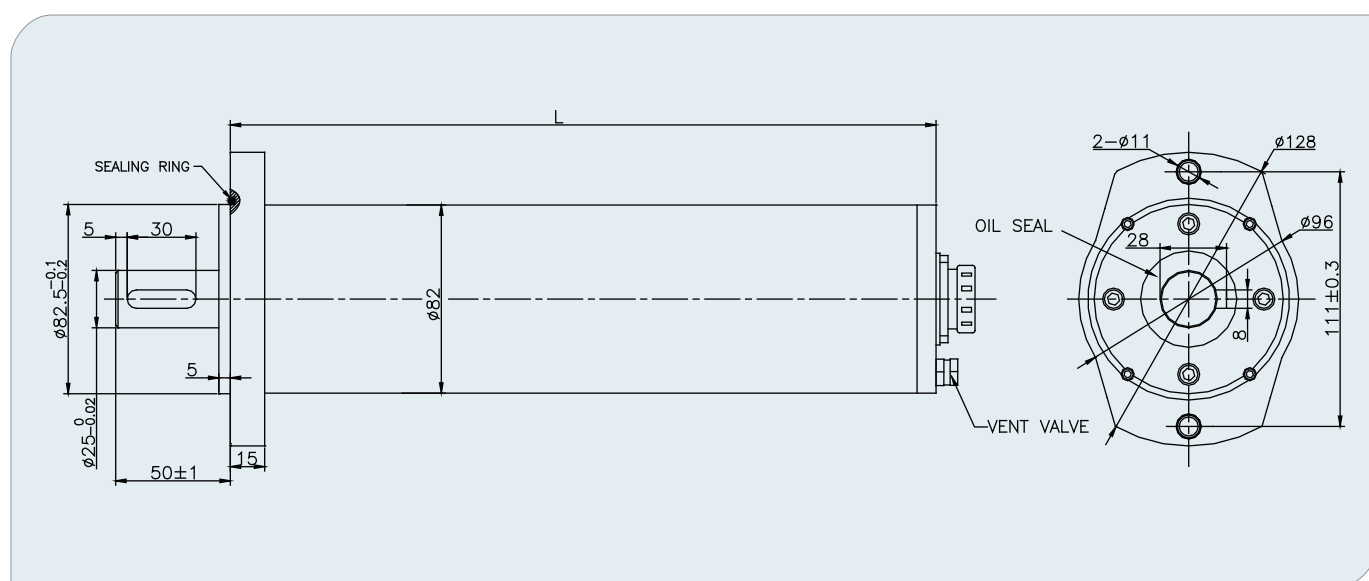


94 FRAME

PMDC/BLDC GEAR MOTOR

General information


- Encoder Available : 2 PPR or 4 PPR.
- Epoxy coating on the surface.
- Protection class IP 65.
- Operating Temperature -40℃ ~ +80℃.
- UL Certified.
- With protective vent valve to reduce condensation.

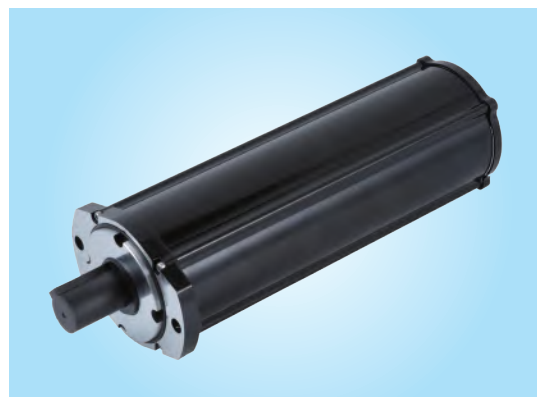

Specification

Model	Voltage (v)	No Load		Rated Load		Torque (N.m)	Ratio	Stage	Power (W)	Length (mm)
		Current (A)	Speed (rpm)	Current (A)	Speed (rpm)					
MB/ME076ZT101-PL0745	24	1	2	6.25	1.3	320	745	4	43	308
MB/ME076ZT102-PL0745	24	1	2.3	7	1.7	320	745	4	57	308
MB/ME076ZT104-PL0745	24	1	3	7	2.2	500	745	4	115	308
MB/ME076ZT103-PL2023	24	1	0.84	6	0.6	550	2023.5	5	34	330

Mechanical

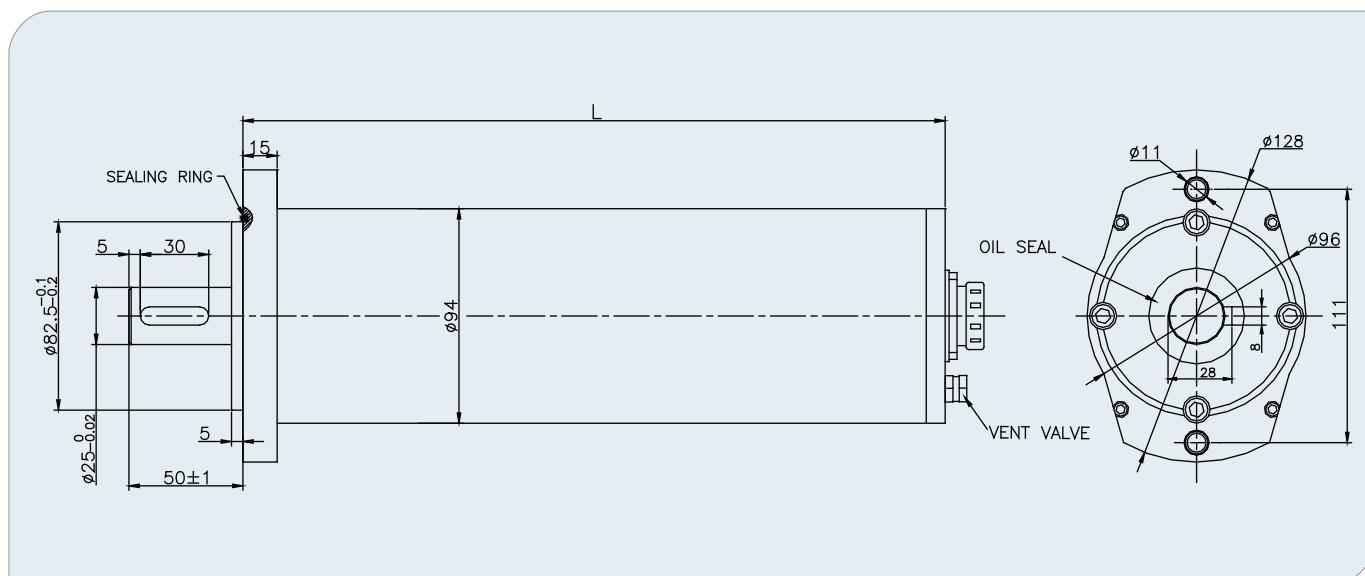


128 FRAME

PMDC/BLDC GEAR MOTOR

General information

- Encoder available : 2 PPR or 4 PPR.
- Epoxy coating on the surface.
- Protection class IP 65.
- Operating temperature -40℃ ~ +80℃.
- With protective vent valve to reduce condensation.

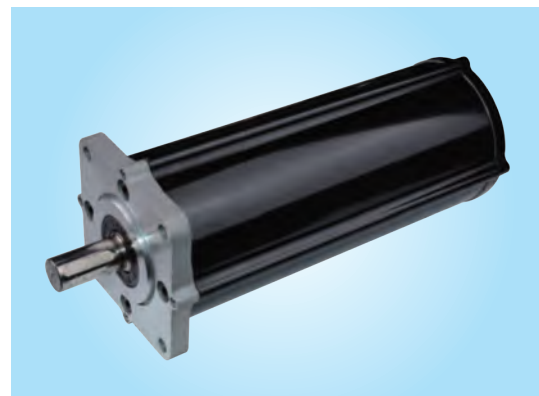

Specification

Model	Voltage (v)	No Load		Rated Load		Torque (N.m)	Ratio	Stage	Power (W)	Length (mm)
		Current (A)	Speed (rpm)	Current (A)	Speed (rpm)					
MB/ME120FG100-PL0023	24	5.39	105	21.82	87	37.3	23	2	339	310
MB/ME120FG100-PL0036	24	5.39	67	21.82	56	58.3	36			
MB/ME120FG100-PL0049	24	5.39	49	21.82	41	79.4	49			
MB/ME120FG100-PL0141	24	5.98	17	21.82	14	205.9	141	3	306	330
MB/ME120FG100-PL0216	24	5.98	11	21.82	9	315.4	216			
MB/ME120FG100-PL0398	24	5.98	6	21.82	5	581.1	398			
MB/ME120FG100-PL0845	24	6.71	3	21.82	2	1098.5	845	4	272	355
MB/ME120FG100-PL1557	24	6.71	2	21.82	1	2024.1	1557			

Mechanical

