


# 50/67 Frame Cross-belt Sorter BLDC Roller

## ● General Information


- External rotor
- Direct drive
- Quick response
- Wide speed range
- High strength and low noise
- Surface knurling available
- Roller length to be customized

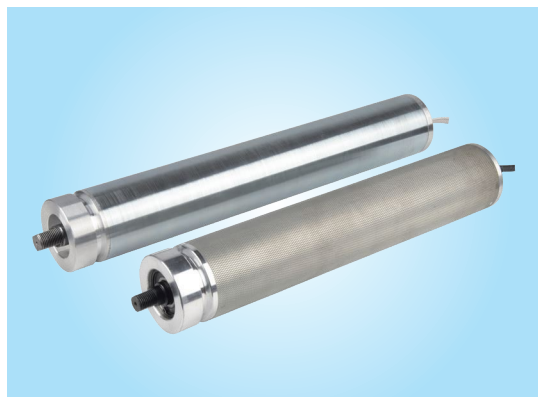

## ● Specification

| Model      | Voltage (V) | Rated Power (W) | Max.Torque (Nm) | Speed Range (RPM) | Linear Speed Range (m/s) | Max. Current (A) | Max. Sorting Weight (Kg) | Work Duty |
|------------|-------------|-----------------|-----------------|-------------------|--------------------------|------------------|--------------------------|-----------|
| RE050AS100 | 48          | 200             | 4.5             | 300-800           | 0.8-2.1                  | 10               | 25                       | S2        |
| RE067AS100 | 48          | 400             | 1.5             | 300-800           | 1-2.8                    | 25               | 35                       | S2        |

## ● Mechanical

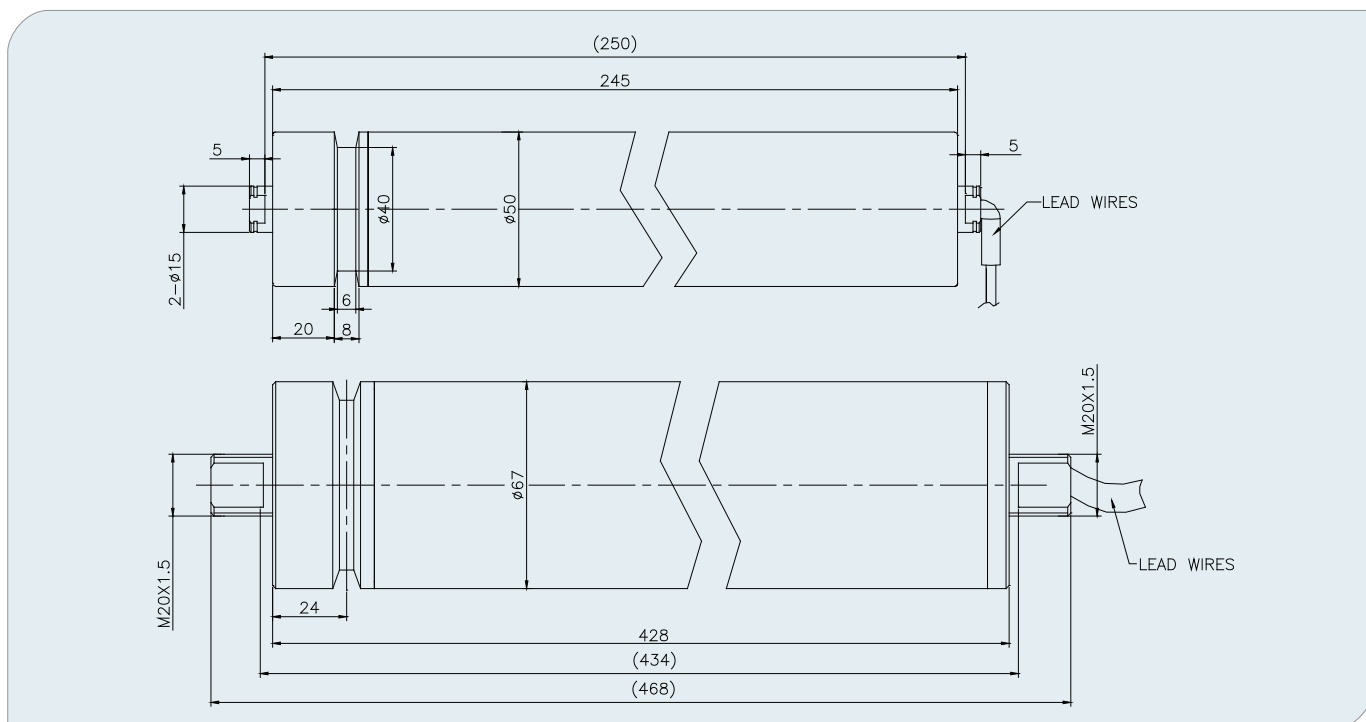

# 50/67 Frame BLDC Sorter Roller Driver



## ● General Information


- Used for BLDC roller motor
- Input voltage: DC48V
- Rated output power: 400W
- RS485 communication
- S2-25% work duty

## ● Electrical Specification

| Item                          | Units | Description                                                                     | Notes                        |
|-------------------------------|-------|---------------------------------------------------------------------------------|------------------------------|
| Power Supply                  | VDC   | 48V±5%                                                                          |                              |
| Rated Current                 | A     | 10                                                                              |                              |
| Peak Current                  | A     | 25                                                                              |                              |
| Rated Power                   | W     | 400                                                                             |                              |
| Speed Range                   | RPM   | 300-1000                                                                        |                              |
| Speed Control                 |       | Communication                                                                   |                              |
| Speed Control Input           |       | Communication or Digital control                                                |                              |
| Communication                 |       | RS485                                                                           |                              |
| Digital Input                 |       | NPN, 5mA                                                                        |                              |
| Work Duty                     |       | S2-25%                                                                          | Based on ambient temperature |
| Operation Ambient Temperature | ℃     | 0-40                                                                            |                              |
| Operation Ambient Humidity    |       | 85% Max.                                                                        | No water drops or rain       |
| Vibration                     |       | Frequency≤20Hz: 9.8m/s <sup>2</sup> ;<br>20Hz≤Frequency≤50Hz: 2m/s <sup>2</sup> |                              |

# 50/67 Frame BLDC Sorter Roller Driver

## ● Characteristic Diagram

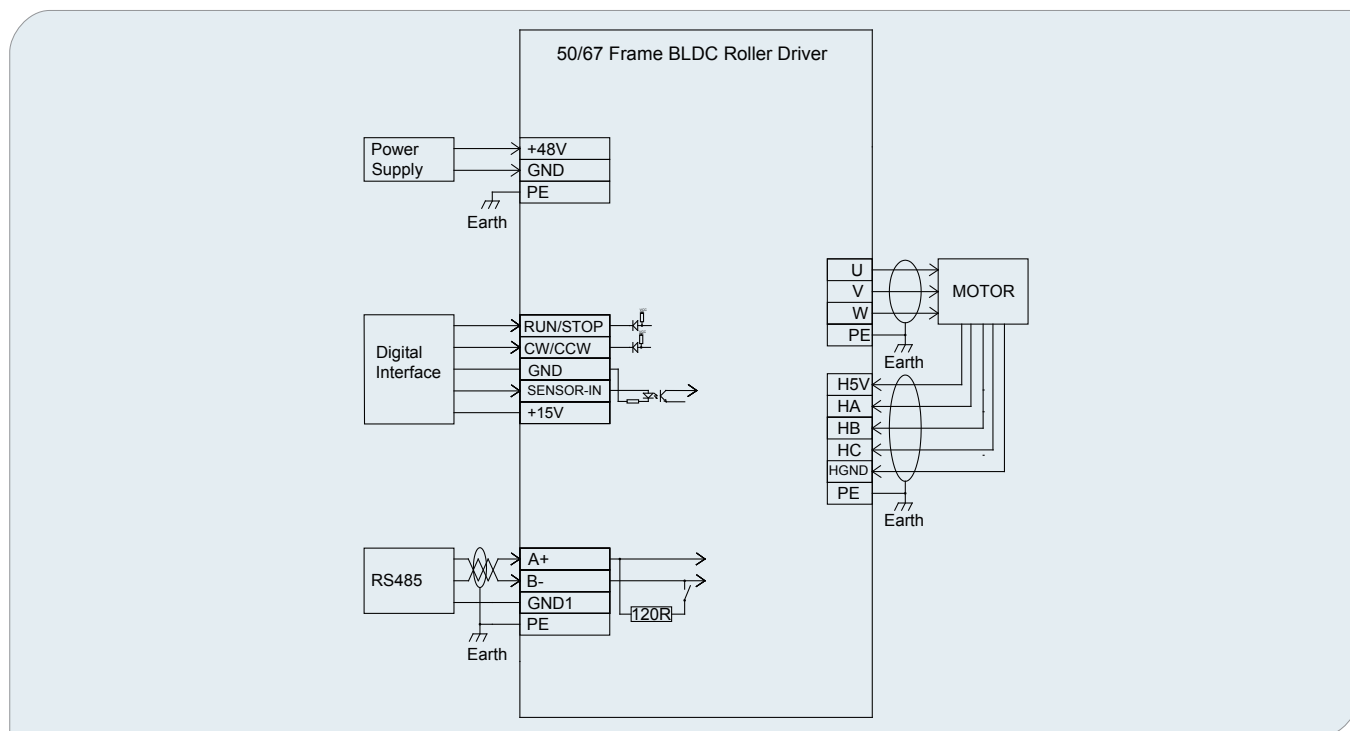

## ● Mechanical

