


56/70 Frame Smart Roller

General Information


- External rotor and Sensorless
- Low noise
- High efficiency
- Multiple color rubber available
- Coating Thickness 2mm or customized

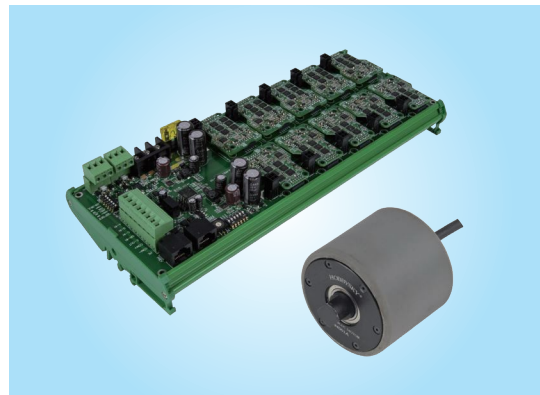


Specification

Model	Voltage (v)	Peak Power (W)	Max. Torque (Nm)	Speed Range (rpm)	Linear Speed (m/s)	Peak Current (A)	Duty Type
RE056AS100	48	50	1.5	350-1000	1-3	5	S2
RE070AS100	48	100	2	350-1000	1.3-3.6	10	S2

Mechanical

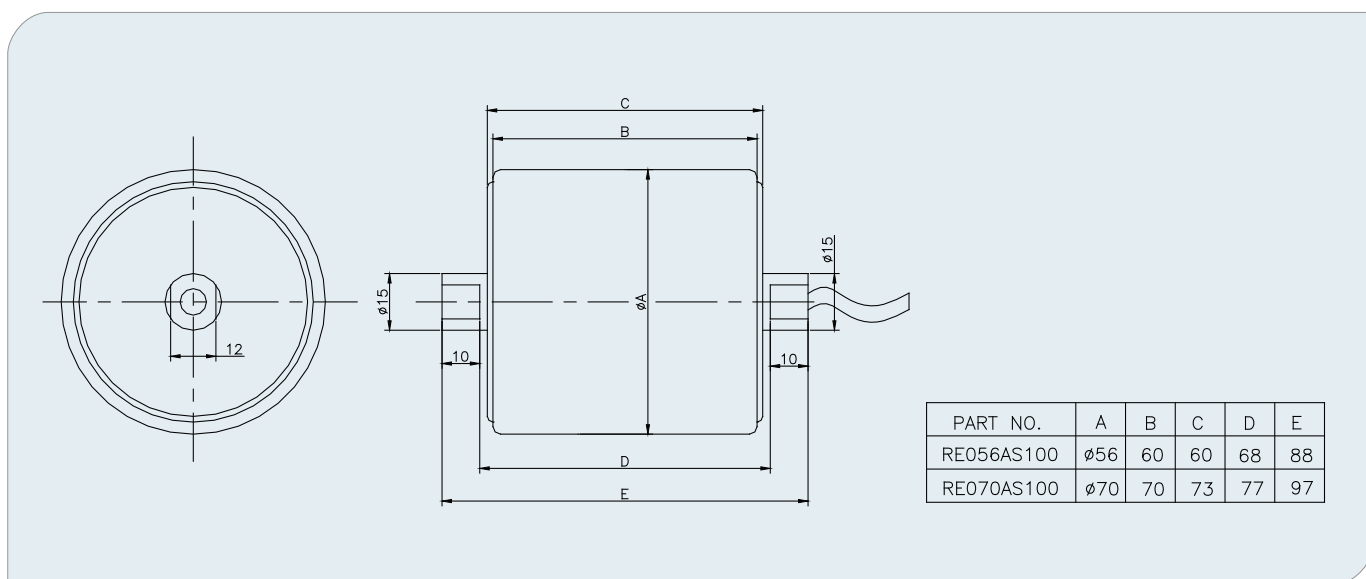

56/70 Frame Smart Roller Integrated Driver

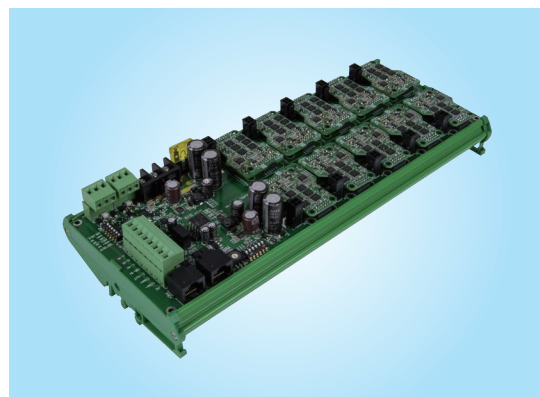

● General Information


- Used for BLDC roller motor
- Rated Voltage: DC 18-50V
- ModBus/CANOpen communication
- One for 10 motors
- S2 work duty

● Electrical Specification

Item	Units	Description	Notes
Power Supply	VDC	18-50	
Rated Current	A	15	
Peak Current	A	40	
Rated Power	W	750	
Speed Range	RPM	350-1000	
Speed Control		Communication or 7 step regulation	
Communication		ModBus / CANOpen	
I/O Port		Direction, Error	
Input Signal		PNP/NPN, 24V, 5mA	
Work Duty		S2	Based on ambient temperature
Operation Ambient Temperature	℃	0-40	
Operation Ambient Humidity		85% Max.	No water drops or rain
Vibration		Frequences≤20Hz: 9.8m/s²; 20Hz≤Frequences≤50Hz: 2m/s²	

56/70 Frame Smart Roller Integrated Driver

● Characteristic Diagram

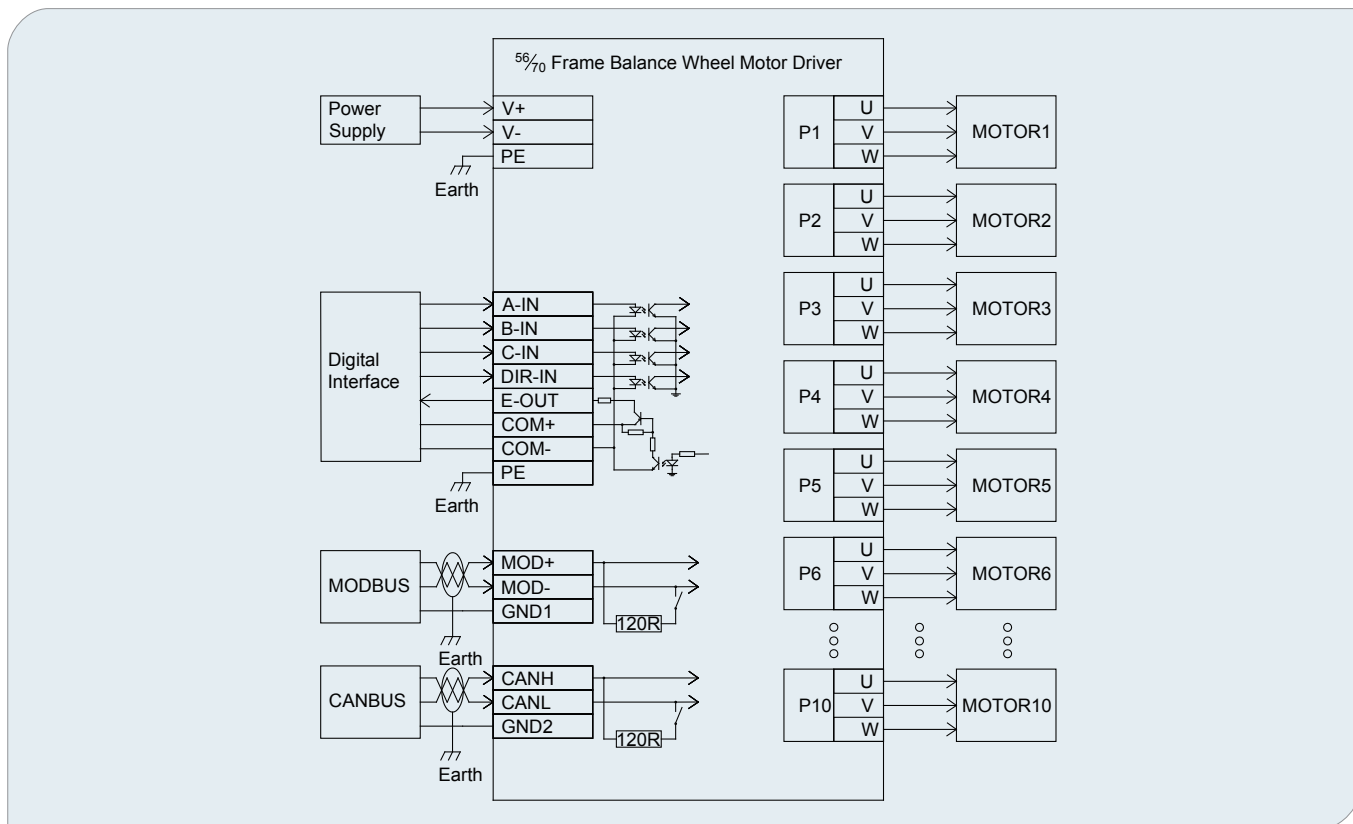

● Mechanical

