


PL030GE30K Planetary Gearbox

● General Information

- Ring material: Metal
- Max. Backlash at no-load: $\leq 2.5^\circ$
- Radial play of shaft: $\leq 0.07\text{mm}$
- Axial play of shaft: $\leq 0.3\text{mm}$
- Permissible Load Range: $0.3\text{Nm} \sim 3.0\text{Nm}$
- Standard output shaft OD 6mm, OD 8mm optional

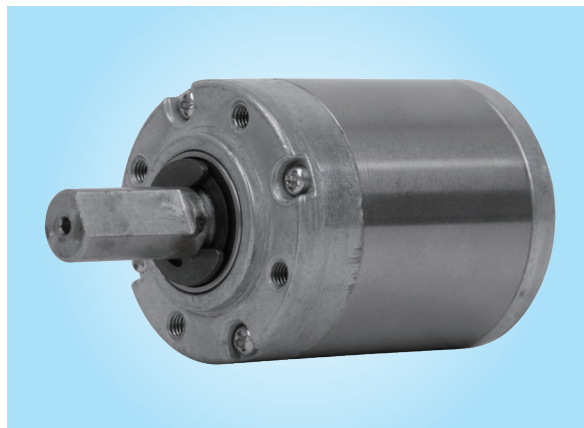

● Specification

	Unit	PL030GE30K-1S	PL030GE30K-2S	PL030GE30K-3S	PL030GE30K-4S
Frame size	mm	$\phi 30$	$\phi 30$	$\phi 30$	$\phi 30$
Reduction ratio		1/3.7, 1/5.2	1/14, 1/19, 1/27, 1/35	1/51, 1/71, 1/100, 1/139	1/189, 1/264, 1/369, 1/516 1/721, 1/939
Efficiency	%	90	81	73	66
Number of stages		1	2	3	4
Rated Continuous torque	Nm	0.3	1.2	2.5	3.0
Max. Momentary torque	Nm	1.0	3.5	7.5	9.0
Max. Radial load(10mm from flange)	N	100	100	100	100
Max. Axial load	N	50	50	50	50
Max. Shaft press fit force	N	100	100	100	100
Gearbox Length	mm	29.0	36.1	43.0	49.9
Weight	g	72	80	108	126
Max. Backlash at no-load	$^\circ$	2.5	2.5	2.5	2.5
Operating Temperature	$^\circ\text{C}$	-15 ~ +80			
Recommend input speed	rpm	<10000			

● Mechanical

