


PL045GE100K Planetary Gearbox

● General Information

- Ring material: Metal
- Max. Backlash at no-load: $\leq 2.5^\circ$
- Radial play of shaft: $\leq 0.06\text{mm}$
- Axial play of shaft: $\leq 0.3\text{mm}$
- Permissible Load Range: $0.1\text{Nm} \sim 10.0\text{Nm}$

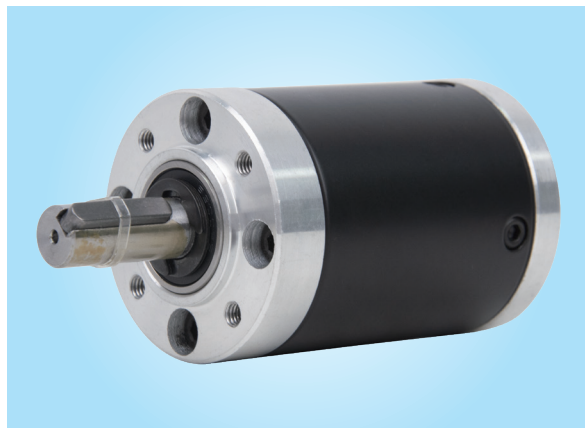

● Specification

	Unit	PL045GE100K-1S	PL045GE100K-2S	PL045GE100K-3S	PL045GE100K-4S
Frame size	mm	$\phi 45$	$\phi 45$	$\phi 45$	$\phi 45$
Reduction ratio		1/3.7, 1/5.2	1/14, 1/19, 1/27	1/51, 1/71, 1/100, 1/139	1/189, 1/264, 1/369, 1/369 1/516, 1/721
Efficiency	%	90	81	73	66
Number of stages		1	2	3	4
Rated Continuous torque	Nm	1.0	4.0	8.0	10.0
Max. Momentary torque	Nm	3.0	12.0	25.0	30.0
Max. Radial load(10mm from flange)	N	200	200	200	200
Max. Axial load	N	100	100	100	100
Max. Shaft press fit force	N	150	150	150	150
Gearbox Length	mm	41.3	51.6	64.4	74.7
Weight	g	417	449	569	675
Max. Backlash at no-load	$^\circ$	2.5	2.5	2.5	2.5
Operating Temperature	$^\circ\text{C}$	-15 ~ +80			
Recommend input speed	rpm	<5000			

● Mechanical

