


PL060GE450K Planetary Gearbox

● General Information

- Ring material: Metal
- Max. Backlash at no-load: $\leq 2.5^\circ$
- Radial play of shaft: $\leq 0.08\text{mm}$
- Axial play of shaft: $\leq 0.4\text{mm}$
- Permissible Load Range: 4.0Nm~45.0Nm

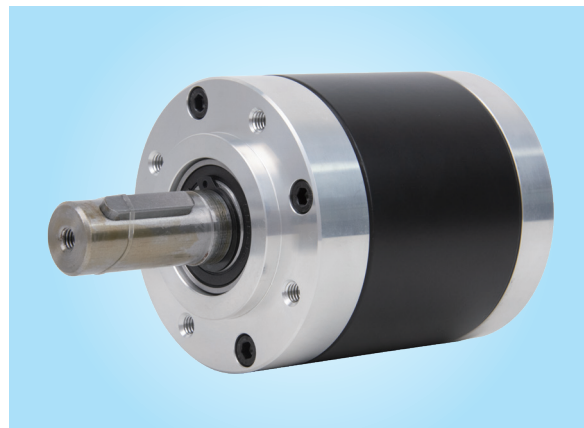

● Specification

	Unit	PL060GE450K-1S	PL060GE450K-2S	PL060GE450K-3S	PL060GE450K-4S
Frame size	mm	$\phi 60$	$\phi 60$	$\phi 60$	$\phi 60$
Reduction ratio		1/3.6, 1/4.25 1/5.33	1/13, 1/15, 1/18 1/23, 1/28	1/43, 1/52, 1/61, 1/72 1/96, 1/121	1/154, 1/187, 1/220 1/260, 1/307
Efficiency	%	90	81	73	66
Number of stages		1	2	3	4
Rated Continuous torque	Nm	4	18	36	45
Max. Momentary torque	Nm	12	50	100	110
Max. Radial load(10mm from flange)	N	400	400	400	400
Max. Axial load	N	120	120	120	120
Max. Shaft press fit force	N	300	300	300	300
Gearbox Length	mm	40.3	53.8	67.2	80.6
Weight	g	510	720	930	1150
Max. Backlash at no-load	$^\circ$	2.5	2.5	2.5	2.5
Operating Temperature	$^\circ\text{C}$	-15 ~ +80			
Recommend input speed	rpm	<6000			

● Mechanical

