


SE060AS

Brushless Servo Motor

General information

- 10 Poles with 3 Phases
- compact design
- Low Cogging
- High Power Density
- High Efficiency
- IP 65
- Absolute and magnetic encoder optional
- Brake available

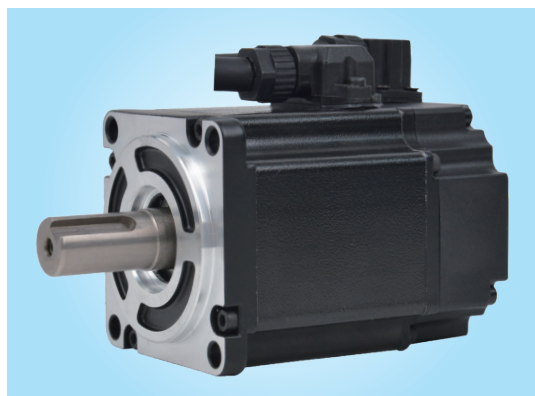


Specifications

SPECIFICATION	Unit	SE060AS100	SE060AS200	SE060AS300
Voltage	VDC	48	48	48
Rated Power (Pw)	W	200	400	600
Rated Speed (Nn)	RPM	3000	3000	3000
Rated Torque (Tn)	Nm	0.64	1.27	1.9
Rated Current (In)	A	5.2	10.5	15
Peak Torque (Tm)	Nm	1.91	3.8	5.7
Peak Current (Im)	A	15.6	31.5	45
Resistance L-L (RI)	ohms	0.44	0.24	0.14
Inductance L-L (HI)	mH	0.85	0.56	0.30
Voltage Constant (Ke)	Vrms/Krpm	7.0	7.0	7.2
Torque Constant (Kt)	Nm/Arms	0.122	0.122	0.122
Rotor Inertia (Jm)	Kg.cm ²	0.4	0.7	1.0
Poles		10	10	10
IP Class		65	65	65
Feedback Device (Multi-turn Absolute Encoder)	PPR/Bit	2500/17	2500/17	2500/17
Length	mm	82	100	121.5
Weight (Wm)	Kg	0.9	1.2	1.45

SE060AS

● Mechanical

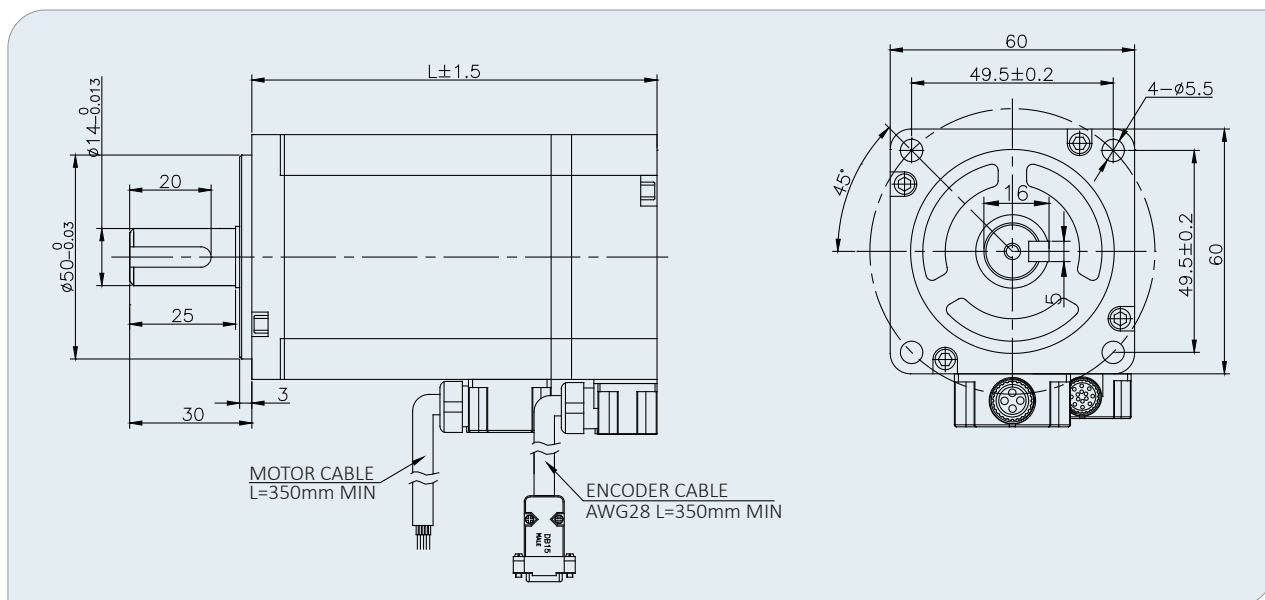

● Characteristic diagram

