

SE080AS

Brushless Servo Motor

General information

- 10 Poles with 3 Phases
- compact design
- Low Cogging
- High Power Density
- High Efficiency
- IP 65
- Absolute and magnetic encoder optional
- Brake available




Specifications

SPECIFICATION	Unit	SE080AS100	SE080AS200	SE080AS300
Voltage	VDC	48	48	48
Rated Power (Pw)	W	565	750	1000
Rated Speed (Nn)	RPM	3000	3000	3000
Rated Torque (Tn)	Nm	1.8	2.4	3.19
Rated Current (In)	A	15	20	25
Peak Torque (Tm)	Nm	5.4	7.2	9.57
Peak Current (Im)	A	45	60	75
Resistance L-L (RI)	ohms	0.13	0.095	0.07
Inductance L-L (HI)	mH	0.65	0.13	0.40
Voltage Constant (Ke)	Vrms/Krpm	7.5	7.5	7.5
Torque Constant (Kt)	Nm/Arms	0.123	0.123	0.123
Rotor Inertia (Jm)	Kg.cm ²	1.25	1.6	1.9
Poles		10	10	10
IP Class		65	65	65
Feedback Device (Multi-turn Absolute Encoder)	PPR/Bit	2500/17	2500/17	2500/17
Length	mm	105	110	118
Weight (Wm)	Kg	2.0	2.35	2.7

SE080AS

● Mechanical

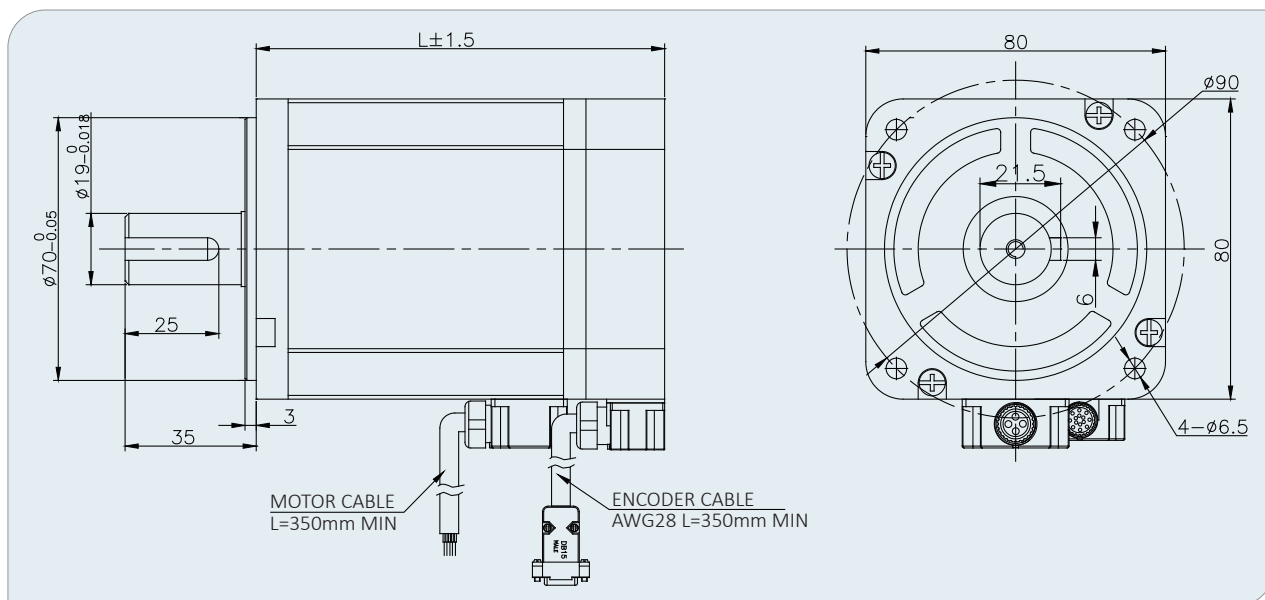

● Characteristic diagram

