



## ● General Information


- 12V, 24V, 48V voltage available
  - Customized stroke optional
  - Wired, wireless or customized controller
  - Hall, magnetic switch, limit switch lead-out
  - High protection: IP67
  - Worm gears, Strong self-locking force
  - Low noise (POM worm):  $\leq 45\text{dB}$
  - Ambient Temperature:  $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$
  - Application: Furniture, medical, and automation equipment
- 



- *Specification*

|                       | Unit | EY-A04A    |
|-----------------------|------|------------|
| Input Voltage         | VDC  | 24         |
| Max. Load             | N    | 6000       |
| Max. Stroke           | mm   | 1000       |
| No-load Speed         | mm/s | 13.2       |
| No-load Current       | A    | 0.8        |
| Full-load Speed       | mm/s | 7          |
| Full-load Current     | A    | 3.5        |
| Installation Distance | mm   | Stroke+130 |

- *Characteristic diagram*

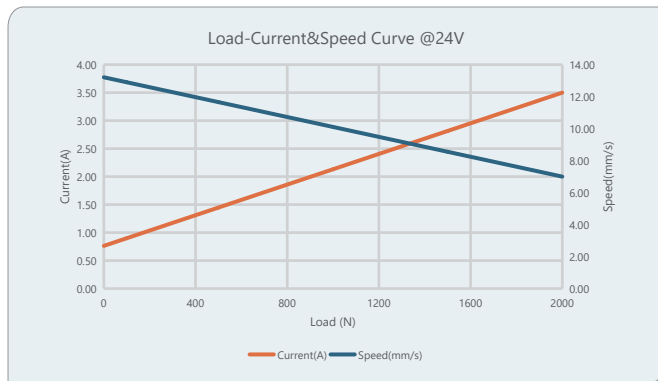

- *Mechanical*

