

MB076HG DC Brush Motor

● General Information

- Stator with permanent rare earth magnet stator which are glued and protected by a stainless steel sleeve
- Motor insulation and winding in class F
- High quality front-locked life-lubricated bearings
- Protection class IP44




● Specification

Specification	Unit	MB076HG200	MB076HG210	MB076HG220	MB076HG230	MB076HG400	MB076HG410
Rated Voltage (Vs)	Vdc	24	24	42	48	48	90
Rated Current	A	9.4	12.5	6.4	4.56	9.5	5.5
Rated Torque	Nm	0.93	0.75	0.78	0.8	1.39	1.32
Rated Power	W	185	247	237	184	408	442
Rated Speed	rpm	1900	3150	2900	2200	2800	3200
Peak Current	A	30	43.5	21.6	16.5	37.8	21.9
Peak Torque	Nm	3.09	2.79	0.48	3	5.7	5.7
Torque Constant (KT)	Nm/A	0.1	0.06	0.13	0.18	0.15	0.26
Back-EMF (KE)	V/KRPM	11.06	6.9	13.8	19.9	16.65	27.7
Resistance (Rmt)	Ω	0.38	0.29	0.48	0.91	0.39	0.95
Inductance (L)	mH	0.35	0.14	0.55	1.05	0.34	0.9
Rotor Inertia (Jr)	kg-m ²	1.06E-04	1.06E-04	1.06E-04	1.06E-04	3.3E-04	3.3E-04
Weight	kg	2.3	2.3	2.3	2.3	3.6	3.6
Motor Length	mm	114	114	114	114	154	154

MB076HG

Mechanical

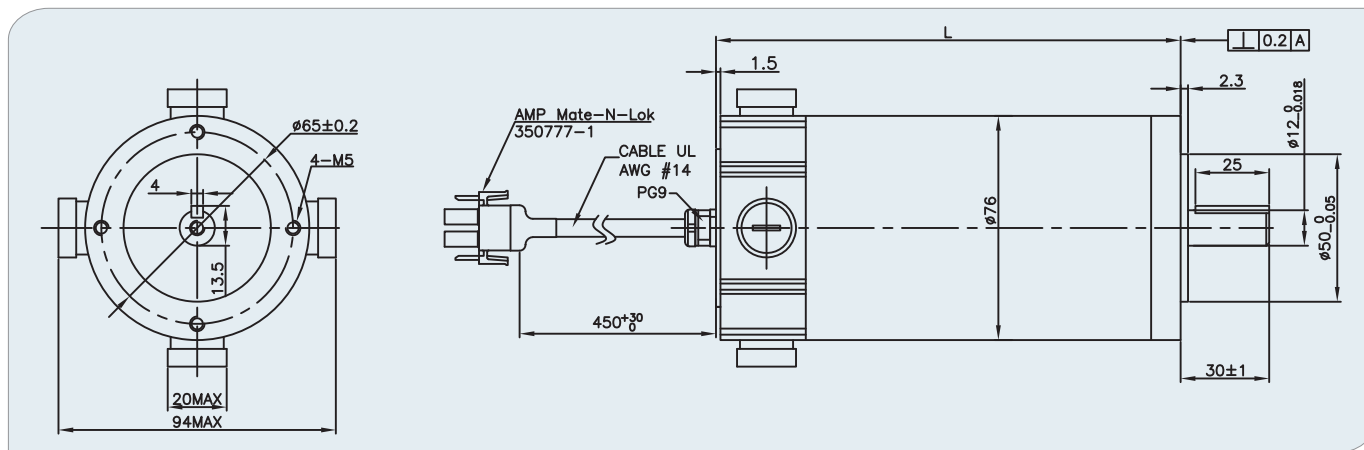

Characteristic diagram

