


Size 14 (35mm) Series

● Basic Description

Size 14 (35mm) stepper lead screw linear actuator is widely used for linear movement applications, can provide up to 230N of continuous thrust.

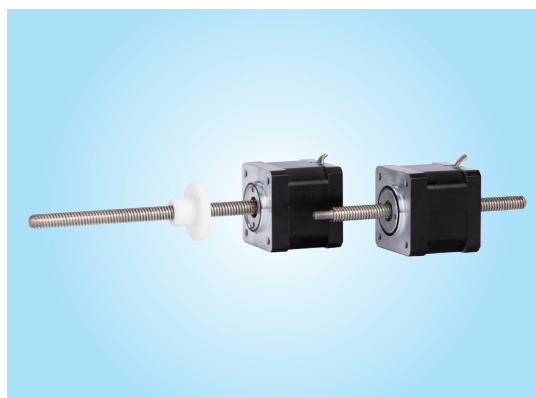

● Motor Specification

Model	Rated Voltage (V)	Phase Current (A)	Phase Resistance (Ω)	Phase Inductance (mH)	Motor Length (mm)
LS035NB101	6.6	0.5	13.2	14.0	33.6
LS035NB102	3.3	1.0	3.5	3.6	33.6
LS035NB103	2.2	1.5	1.8	1.9	33.6
LS035NB201	12.0	0.5	24.0	29.0	45.6
LS035NB202	6.0	1.0	6.0	7.2	45.6
LS035NB203	4.0	1.5	2.7	3.2	45.6


Note : Other parameters can be customized

● Lead Screw Specification


Lead Code	Screw Dia. (inch/mm)	Lead (inch/mm)	Thread Starts
E0079	0.197/5.0	0.079/2.0000	1
F0192	0.219/5.56	0.192/4.8768	4
H0024	0.25/6.35	0.024/0.6096	1
H0050		0.050/1.2700	1
H0063		0.063/1.5875	1
H0096		0.096/2.4384	2
H0100		0.100/2.5400	2
H0125		0.125/3.1750	2
H0192		0.192/4.8768	4
H0200		0.200/5.080	4
H0250		0.250/6.350	4
H0384		0.384/9.7536	6
H0500		0.500/12.700	8
H1000		1.000/25.400	8
J0059	0.315/8.00	0.059/1.500	1
J0079		0.079/2.00	1
J0157		0.157/4.00	2
J0315		0.315/8.00	4
J0470		0.470/12.00	6

Size 14 (35mm) Series

● External Actuator Mechanical

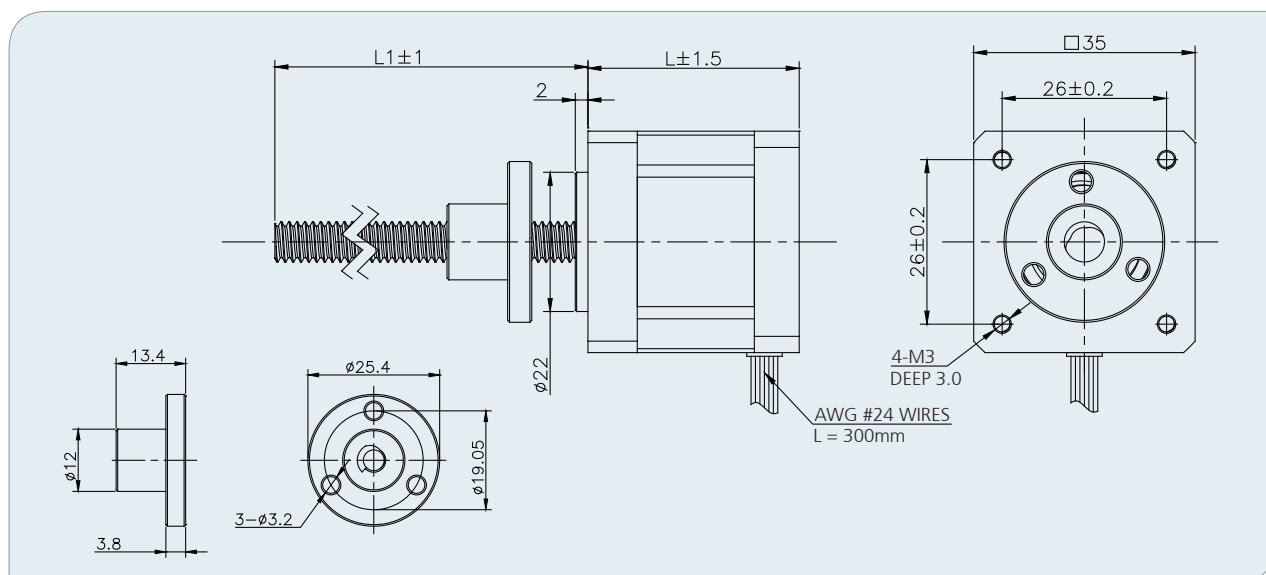

● Captive Actuator Mechanical

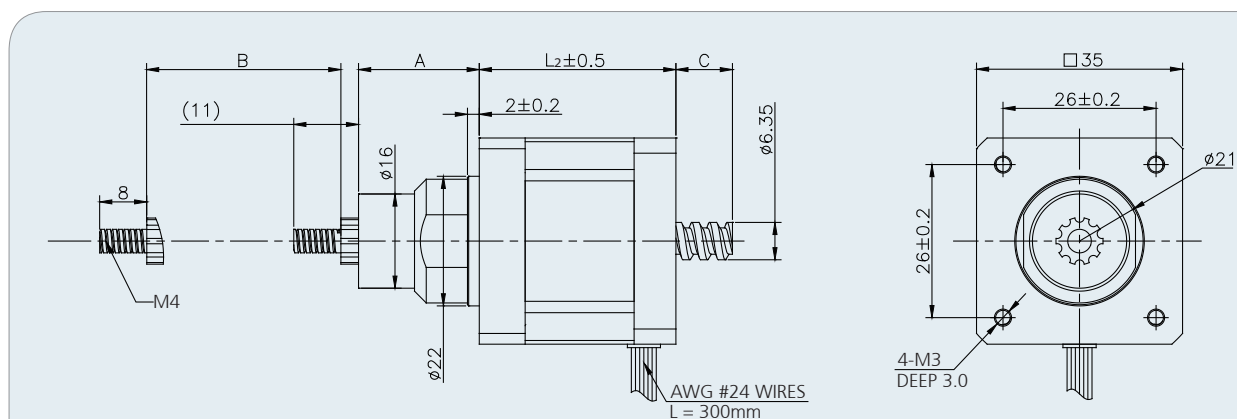


● Stroke Specification

Size A (mm)	B (mm)	C (mm)	
		L2=34	L2=45
20.8	12.70	4.30	1.30
27.2	19.05	10.65	7.65
33.5	25.40	17.00	14.00
39.9	31.75	23.35	20.35
46.2	38.10	29.70	26.70
58.9	50.80	42.40	39.40
71.6	63.50	55.10	52.10

Size 14 (35mm) Series

● Non-Captive Actuator Mechanical

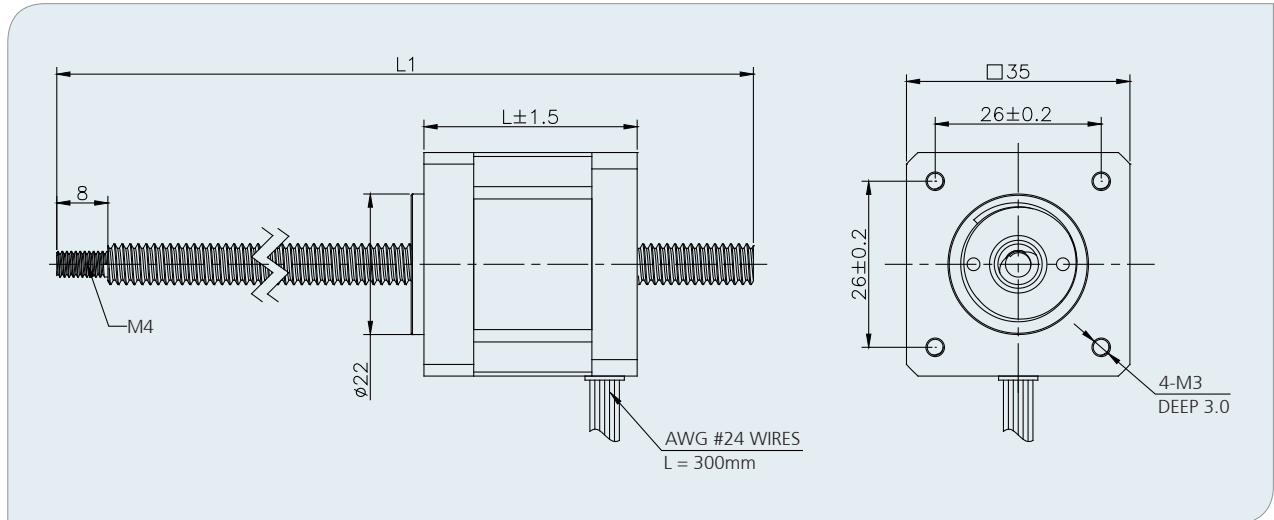

● Speed-Thrust Curves

