


DC BRUSH MOTOR



MB040JS

We can customize it according to customer's requirements

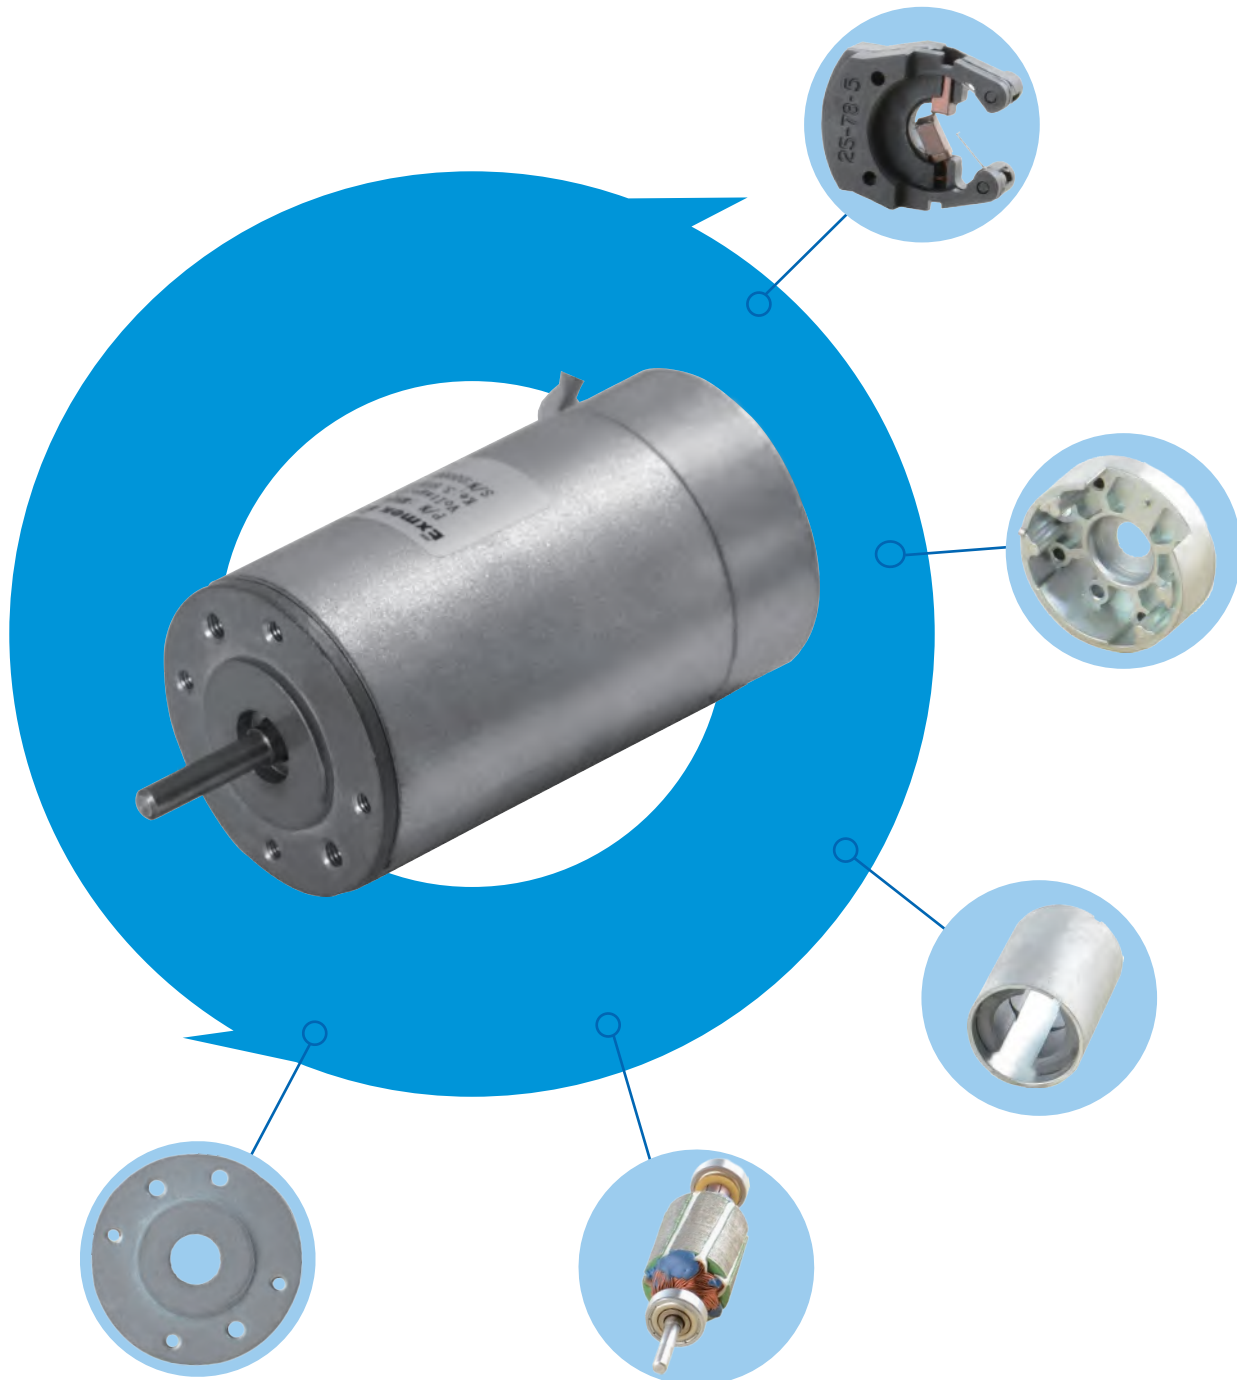


WD SERIES GEARMOTOR

● General information

- Aluminum Diecasting Gearbox
- Rolled Steel Housing Construction
- Built-in EMC Components
- Hall Sensor Feedback Available
- Various Output Shaft Extension

● Mechanical

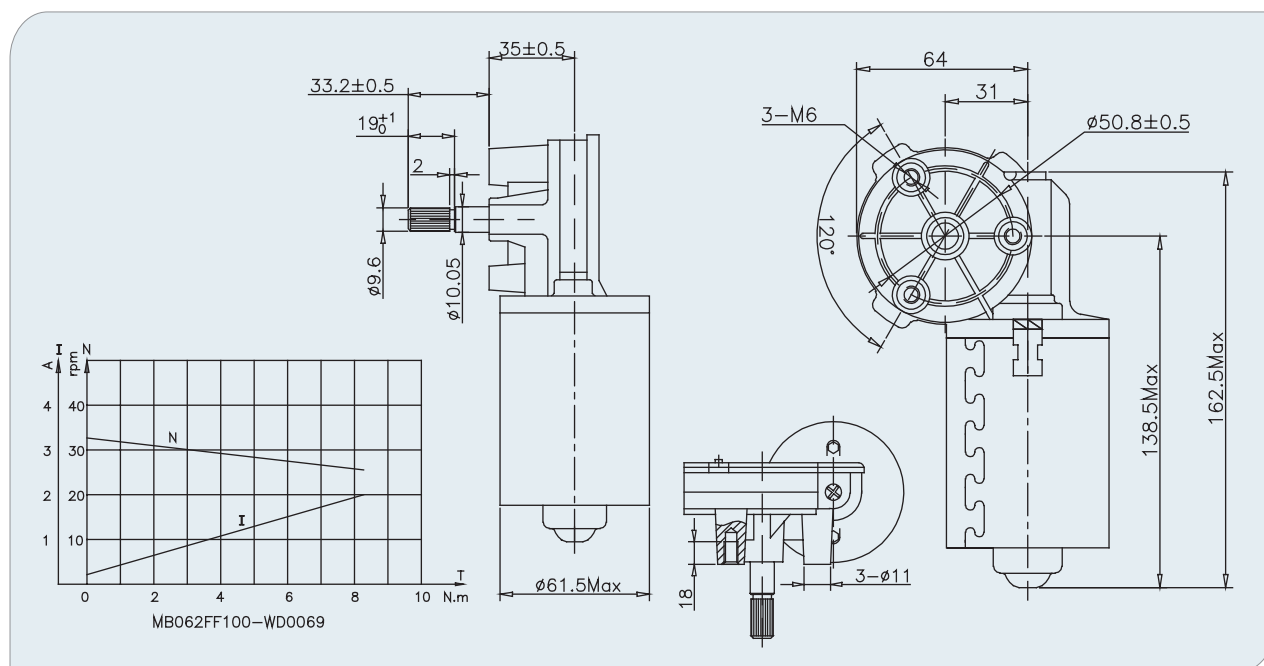

● Specifications

Part No.	No Load Speed	Rated				Peak Torque
		Voltage	Speed	Current	Torque	
	(RPM)	(A)	(RPM)	(A)	(N.m)	(N.m)
MB062FF100-WD0069	33	24	28	2.5	6	10
MB062FF105-WD0069	62	12	52	12	3	10
MB062FF100-WD0055	77	24	70	3.5	4	14

MB030JS

DC Brush Motor



General information


- Ball Bearings
- 7-Slot Armature
- Copper-Graphite Brushes
- 2-Pole Stator
- Heavy-Gage Steel Housing
- Diamond-Turned Commutator
- Ceramic Magnets
- Silicon Steel Laminations
- Encoders, Gearboxes and brakes available

Specifications


SPECIFICATION		MB030JS100	MB030JS200	MB030JS300
Voltage	(VDC)	24	24	24
No Load Speed	(RPM)	7700	8150	9960
No Load Current	(A)	0.12	0.13	0.18
Rated Speed	(RPM)	5180	5970	8070
Rated Torque	(Ncm)	1.13	1.41	1.84
Rated Current	(A)	0.58	0.74	1.14
Rated Power	(W)	6.1	8.8	15.5
Peak Torque	(Ncm)	5.11	7.34	11.7
Peak Current	(A)	1.98	2.91	5.54
Terminal Resistance	(OHMS)	12.1	8.24	4.33
Inductance	(mH)	6.27	4.57	2.34
Voltage Constant	(V/KRPM)	2.87	2.76	2.29
Rotor Inertia	(Kg.cm ²)	0.00989	0.012	0.0162
Insulation Class		F	F	F
L	(mm)	52.58	55.75	62.1
Weight	(Kg)	0.13	0.15	0.17

MB030JS

● Mechanical

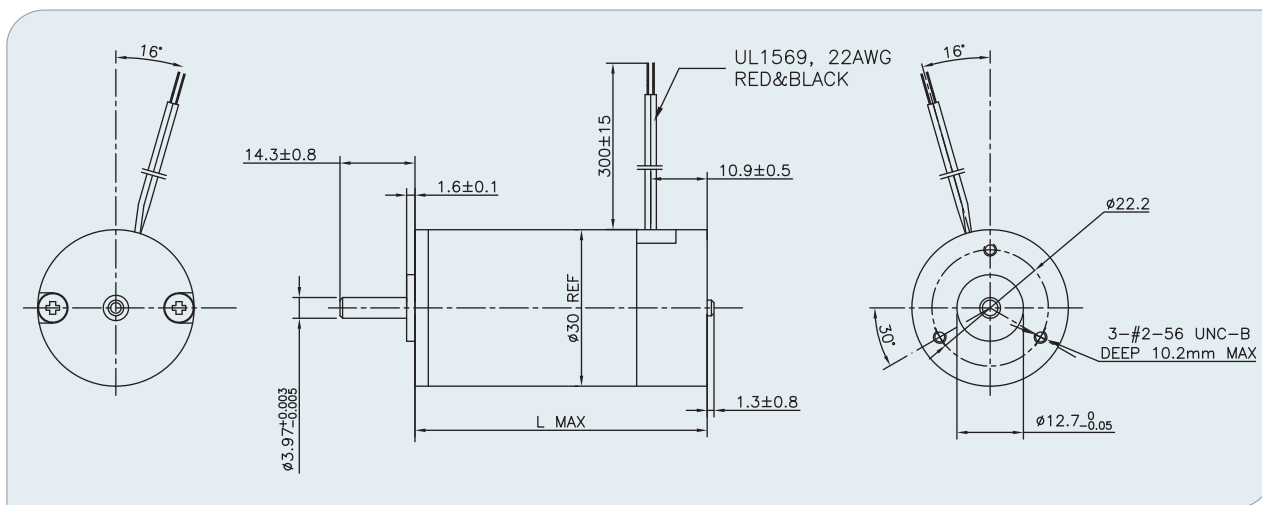

● Characteristic diagram

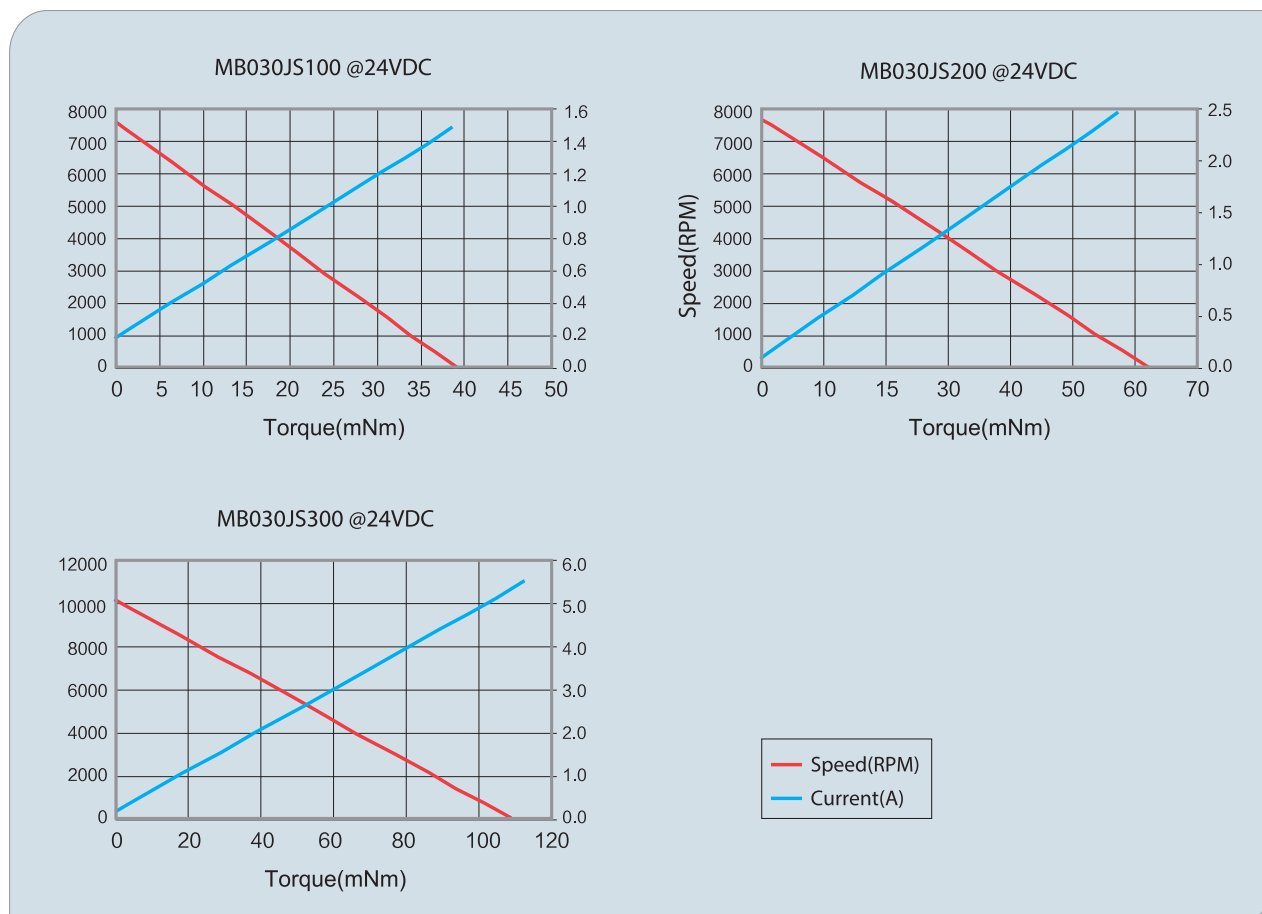

MB040JS

DC Brush Motor



General information


- Ball bearing/sintered Bronze bearing available
- Ceramic Magnet
- 7-slot Armature
- Copper-Graphite Brush
- Encoder Planetary gearbox available

Specifications


SPECIFICATION		MB040JS100	MB040JS200	MB040JS300	MB040JS400	MB040JS500	MB040JS600
Rated Voltage	(VDC)	24	24	24	24	24	24
No Load Speed	(RPM)	6870	5880	6100	6320	4920	5230
No Load Current	(A)	0.16	0.15	0.18	0.19	0.16	0.18
Nominal Speed	(RPM)	5770	5410	5200	6000	4400	4850
Nominal Torque	(NCM)	1.7	3.3	4.3	4.9	6.7	8.1
Nominal Current	(A)	0.88	1.35	1.35	2.08	2.14	2.77
Nominal Power	(W)	10.3	18.7	23.4	30.8	30.9	41.1
Peak Torque	(NCM)	9.6	22.2	29	34.7	43.6	54.2
Peak Current	(A)	3.25	6.09	8.1	10.1	9.64	13
Ke	(V/KRPM)	3.25	3.9	3.82	3.65	4.8	4.44
Rotor Inertia	(Kg.m ² x10 ⁻⁶)	1.9	3.2	4.2	5.6	7.1	8.5
Resistance	(OHMS)	7.38	3.94	2.98	2.37	2.49	1.85
Insulation Class		B	B	B	B	B	B
Weight	(Kg)	0.16	0.19	0.25	0.34	0.39	0.44
L	(mm)	48	57	62	70	78.8	86

MB040JS

● Mechanical

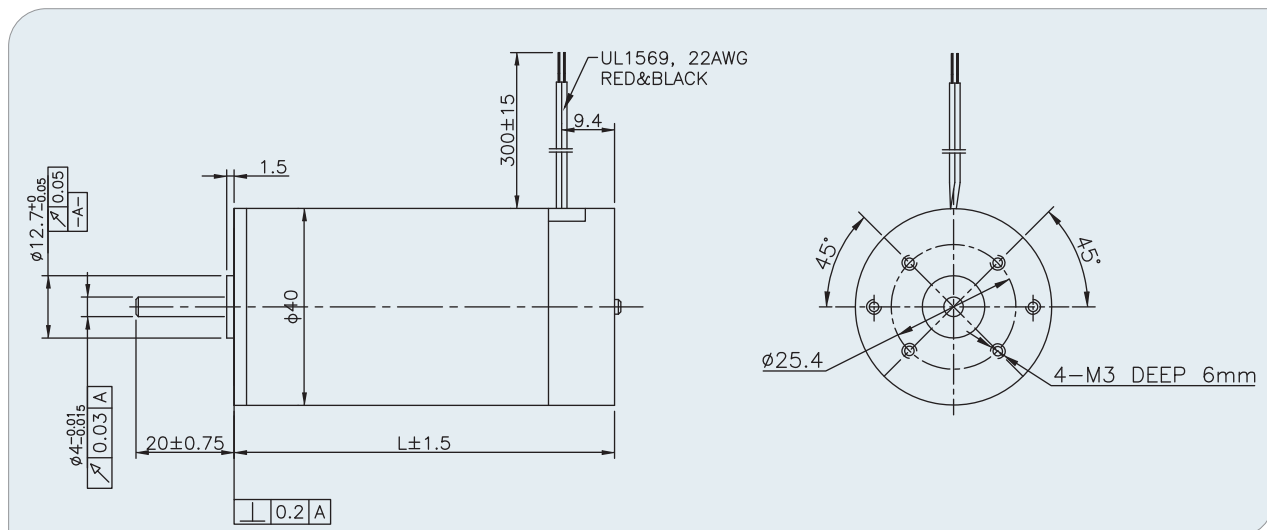

● Characteristic diagram

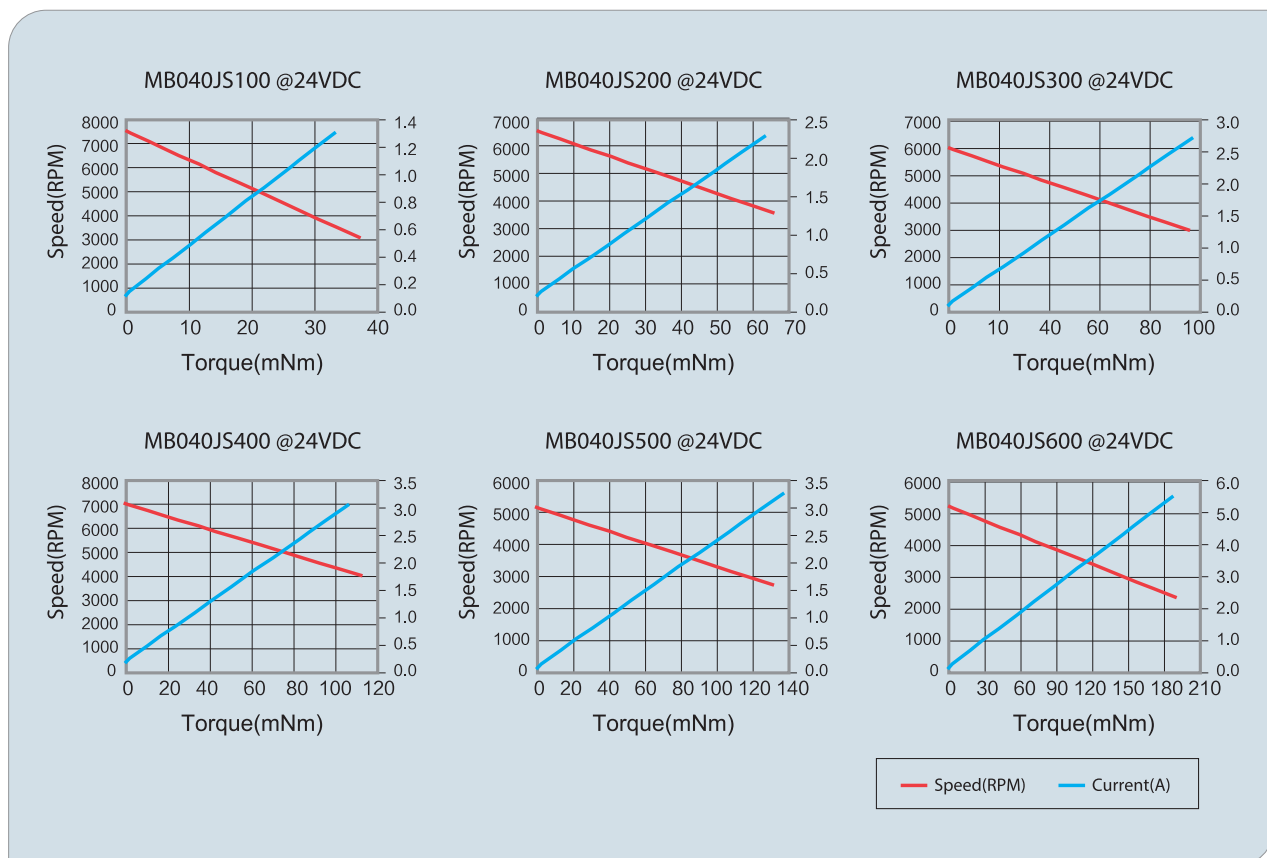

MB042DK

DC Brush Motor



General information


- Mounting holes to DIN standard
- Graphit-copper brushes
- Encoder Brake and Planetary gearbox available
- Ball bearings

Specifications


SPECIFICATION		MB042DK100	MB042DK200	MB042DK300
Voltage	(VDC)	24	24	24
No Load Speed	(RPM)	4250	4000	3750
No Load Current	(A)	0.2	0.2	0.15
Nominal Speed	(RPM)	3400	3000	3000
Nominal Torque	(Ncm)	4	7.5	9
Nominal Current	(A)	1	1.6	1.75
Nominal Power	(W)	14.3	24	28.3
Peak Torque	(Ncm)	15	30	37
Peak Current	(A)	3.5	6	7.5
Ke	(V/KRPM)	5.34	5.8	6.03
Rotor Inertia	(Kg.cm ²)	0.06	0.095	0.13
Resistance	(OHMS)	5.31	4.15	3.72
Insulation Class		B	B	B
Weight	(Kg)	0.48	0.6	0.64
L	(mm)	75	85	95

MB042DK

Mechanical

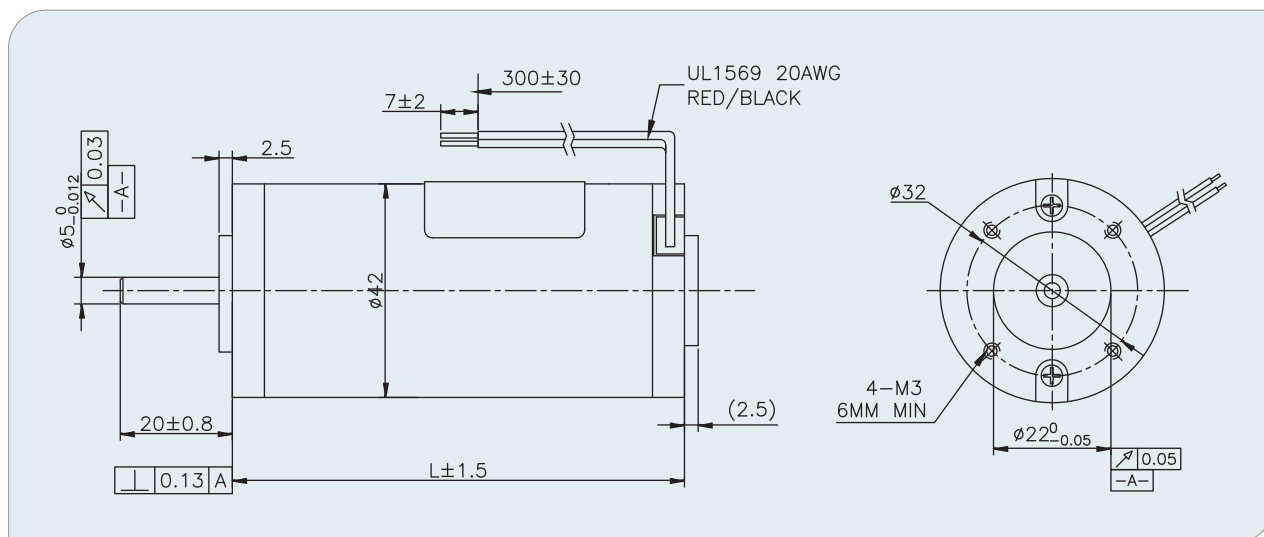

Characteristic diagram

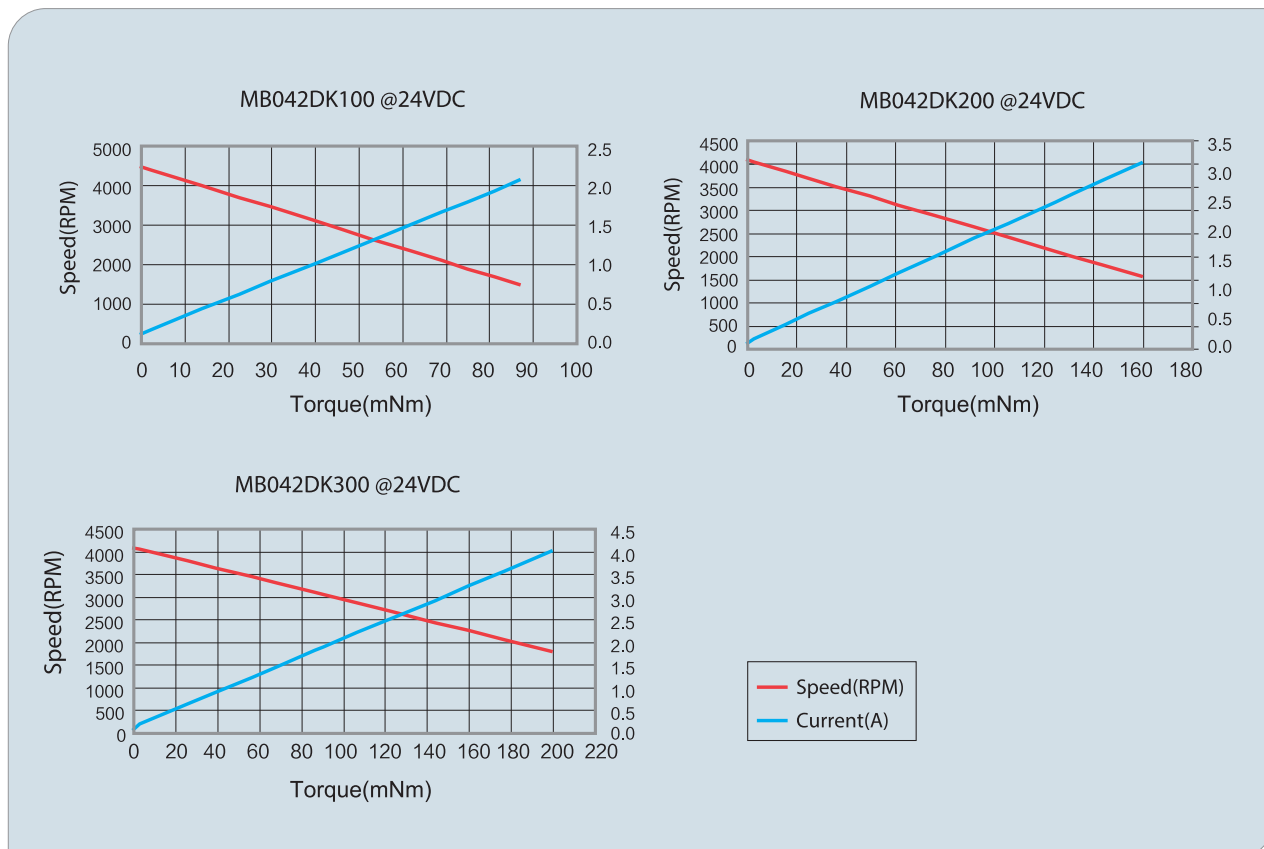

MB054TP

DC Brush Motor



General information


- Ball bearing
- Ceramic magnet
- 11 slot Armature
- Copper-Graphnrite Brushes
- Encoder. Planetary gearbox available

Specifications


SPECIFICATION		MB054TP100	MB054TP300	MB054TP600	MB054TP700
Voltage	(V)	24	24	24	24
No Load Speed	(RPM)	4000	4000	4000	4000
No Load Current	(A)	0.32	0.34	0.3	0.15
Nominal Torque	(Nm)	0.07	0.15	0.26	0.36
Nominal Speed	(RPM)	3200	3300	3300	3300
Nominal Power	(W)	23.5	51.8	90	124.4
Nominal Current	(A)	1.65	3.2	5.3	7.2
Peak Torque	(Nm)	0.35	0.76	1.4	1.8
Peak Current	(A)	7	14.9	27.3	35.6
Rotor Inertia	(Kg.mm ²)	115	215	370	480
Ke	(V/KRPM)	5.77	5.77	5.77	5.77
Resistance	(OHMS)	3.45	1.65	0.88	0.68
Insulation Class		B	B	B	B
Weight	(Kg)	0.6	0.9	1.3	1.6
L	(mm)	75	94	126	145

MB054TP

● Mechanical

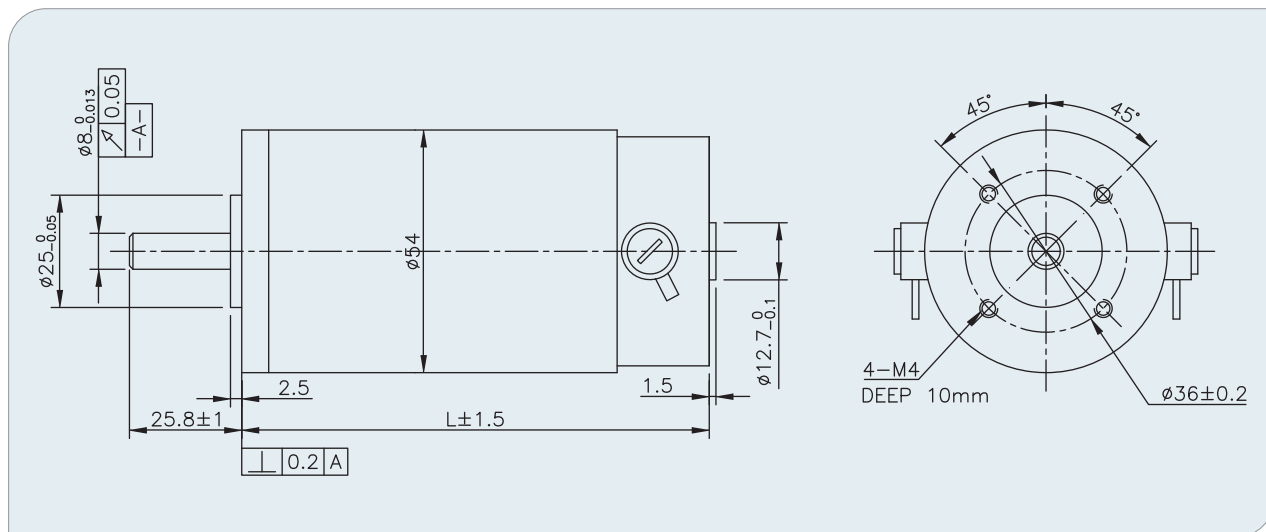

● Characteristic diagram

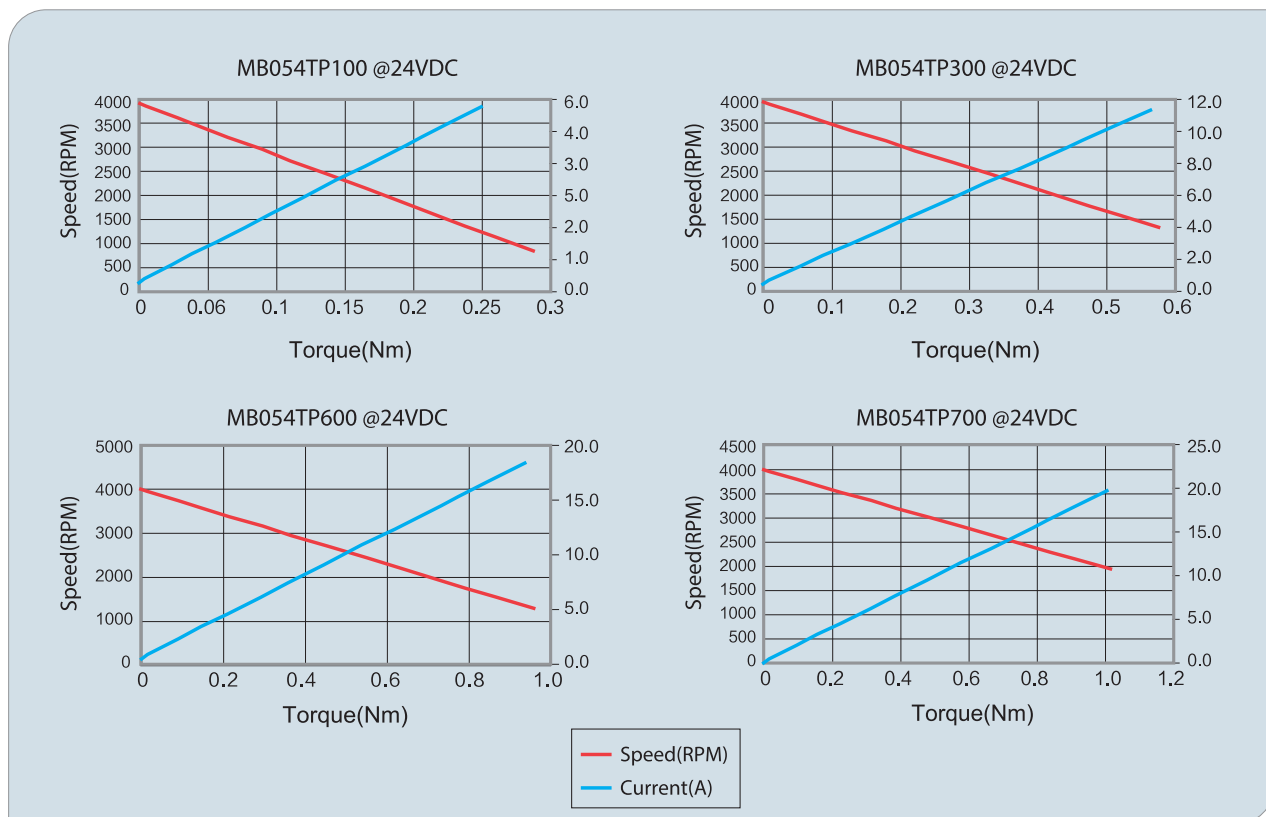

MB057DG

DC Brush Motor



General information


- High performance motors with exceptional efficiency
- Compact size through optimized torque to inertia ratio
- Developed for high dynamic applications
- Best price performance ratio by cost improved design
- Various options to meet your specific needs

Specifications


SPECIFICATION		MB057DG100	MB057DG210	MB057DG310	MB057DG410	MB057DG430
Continuous Stall Torque	(Nm)	0.10	0.20	0.35	0.40	0.40
Peak Stall Torque	(Nm)	0.50	1.05	1.50	1.44	1.44
Continuous Stall Current	(A)	0.6	3	3.3	3.3	4.7
Maximum Pulse Current	(A)	2.5	14.7	14.2	11.9	16.7
Maximum Terminal Voltage	(V)	60	60	60	60	60
Maximum Speed	(RPM)	3000	6000	5200	4700	6000
Mechanical Data						
Rotor Moment Of Inertia	(Kg.m ²)	1.3E-05	2.7E-05	4.3E-05	5.3E-05	5.3E-05
Mechanical Time Constant	(mS)	10.4	8.4	8.2	8	8
Motor Mass	(gram)	700	1000	1400	1600	1600
Thermal Data						
Thermal Resistance (Armature To Ambient)	(C/W)	10	5	4.2	4	4
Winding Specifications						
Torque Constant(KT)	(Nm/A)	0.19	0.071	0.105	0.121	0.86
Voltage Constant(Back EMF)	(V/KRPM)	20	7.41	11	12.7	9
Terminal Resistance	(OHMS)	32	1.55	2	2.2	1.5
Amature Inductance	(mH)	50	3.39	5.2	6.4	2.4
Electrical Time Constant	(mS)	1.6	2.1	2.6	2.9	1.6
L	(mm)	84	102	127	140	140

MB057DG

● Mechanical

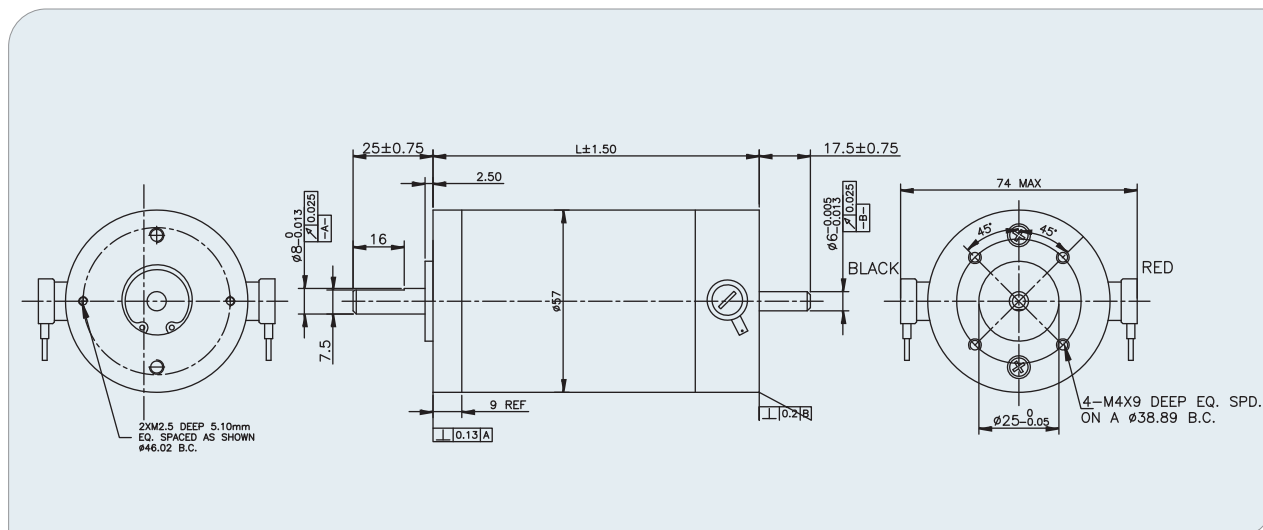

● Characteristic diagram

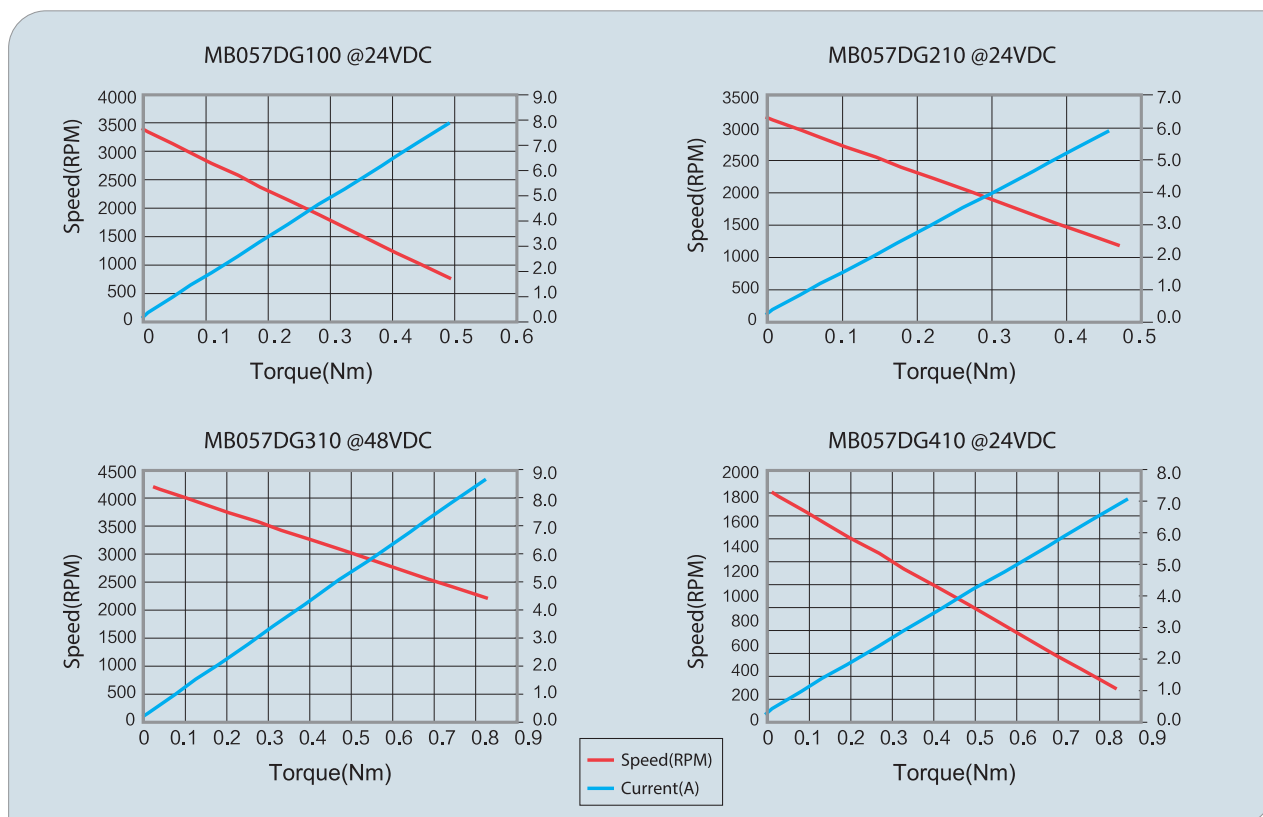

MB063KG

DC Brush Motor



General information


- Ceramic Magnets
- 7-slot Armature
- Copper-graphite Brushes
- Encoder Brake and Planetary gearbox available

Specifications


SPECIFICATION		MB063KG100	MB063KG150	MB063KG200	MB063KG250
Rated Voltage	(VDC)	24	12	24	12
No Load Speed	(RPM)	3600	3600	3650	3500
No Load Current	(A)	0.36	0.6	0.4	0.8
Nominal Speed	(RPM)	3300	3100	3350	3000
Nominal Torque	(Ncm)	14	13.7	27	24
Nominal Current	(A)	2.7	5.2	4.9	8.7
Nominal Power	(W)	50	50	100	100
Peak Torque	(Ncm)	108	82	211	202
Peak Current	(A)	18	27	40	64
Rotor Inertia	(g.cm ²)	400	400	750	750
Insulation Class		B	B	B	B
Weight	(Kg)	1.2	1.2	1.7	1.7
L	(mm)	95	95	125	125

MB063KG

- *Mechanical*

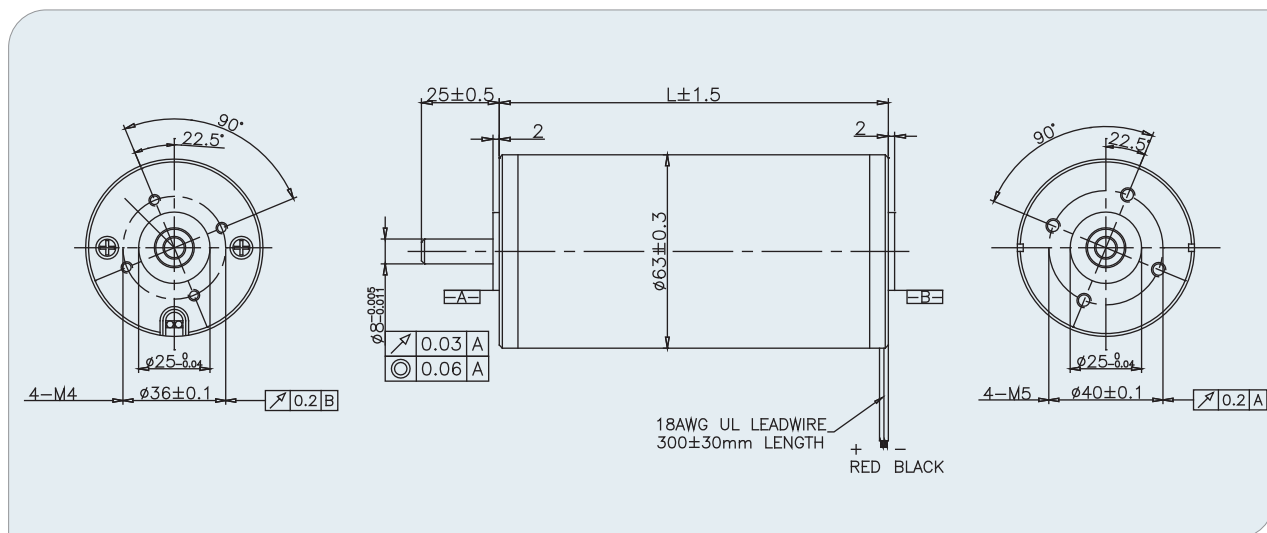

- *Characteristic diagram*

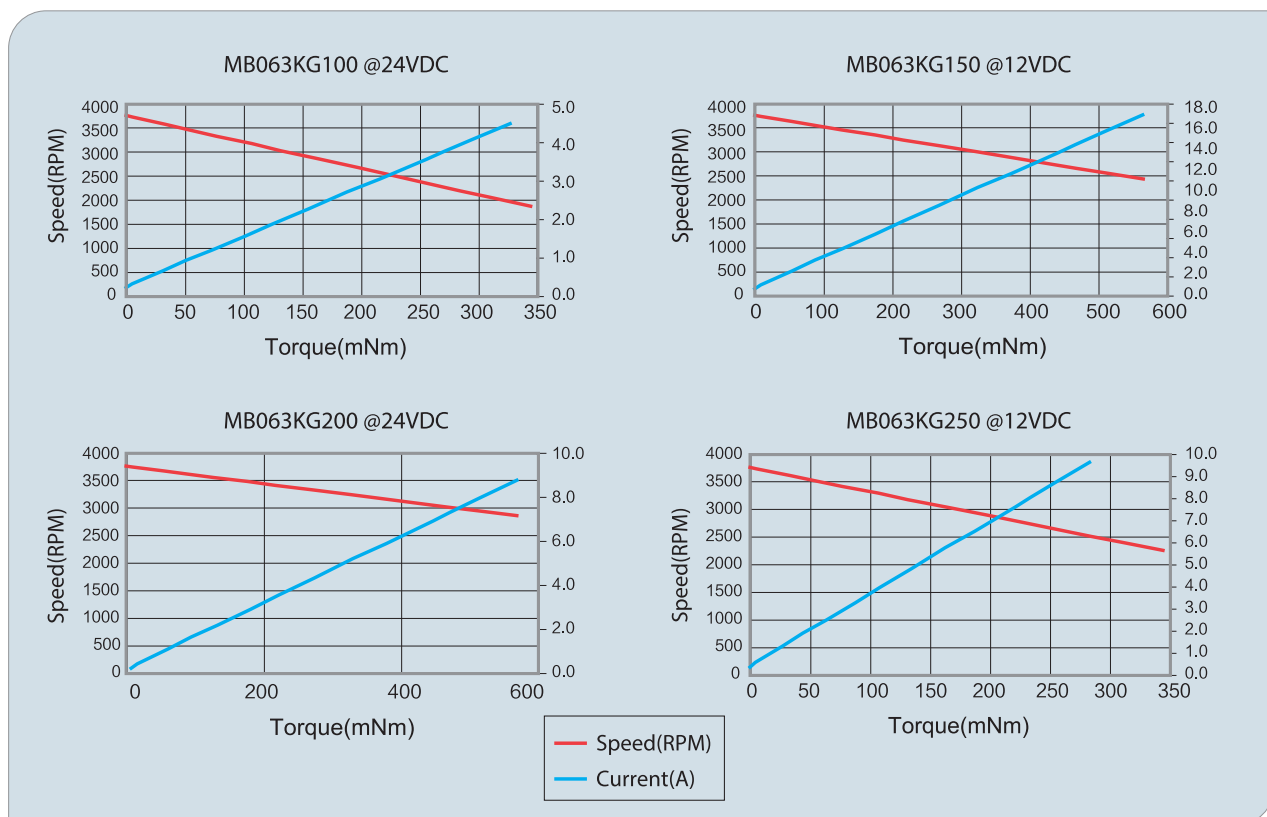

MB080FG

DC Brush Motor



General information


- IEC 56/B14 Mounting Flange, NEMA34 Optional
- Used for Servo/Drive application
- Insulation Class: F With UL certificate per request
- 2Pole Ceramic Magnet Structure with Low Cogging
- High Quality ball bearings in both front and rear endcap
- Continuous Duty
- Externally Replaceable Brush Structure

Specifications


SPECIFICATION		MB080FG200	MB080FG400	MB080FG500	MB080FG600	MB080FG450
Max Voltage	(VDC)	90	90	90	90	90
Continuous Stall Torque	(NM)	0.52	0.84	1.2	1.58	0.84
Peak Stall Torque	(NM)	2.64	4.23	6	7.97	4.23
Max. Speed	(RPM)	6000	4400	4800	3700	6000
Terminal Resistance	(OHMS)	1.43	1.83	1.05	1.14	0.91
Inductance	(mH)	3.9	5.42	2.93	3.51	2.31
Ke	(V/KRPM)	12.5	20	18.4	23.8	13.36
Torque Constant	(Nm/Amps)	0.12	0.19	0.17	0.23	0.13
Rotor Inertia	(Kg.cm ²)	1.34	2.33	3.39	4.45	2.33
Friction Torque	(Ncm)	3.53	4.24	4.94	5.64	4.23
Damping Torque	(Ncm/KRPM)	0.56	0.71	0.85	0.99	0.71
Weight	(Kg)	2.54	3.27	3.99	4.77	3.27
L	(mm)	121.4	146.8	172.2	197.6	146.8

MB080FG

● Mechanical

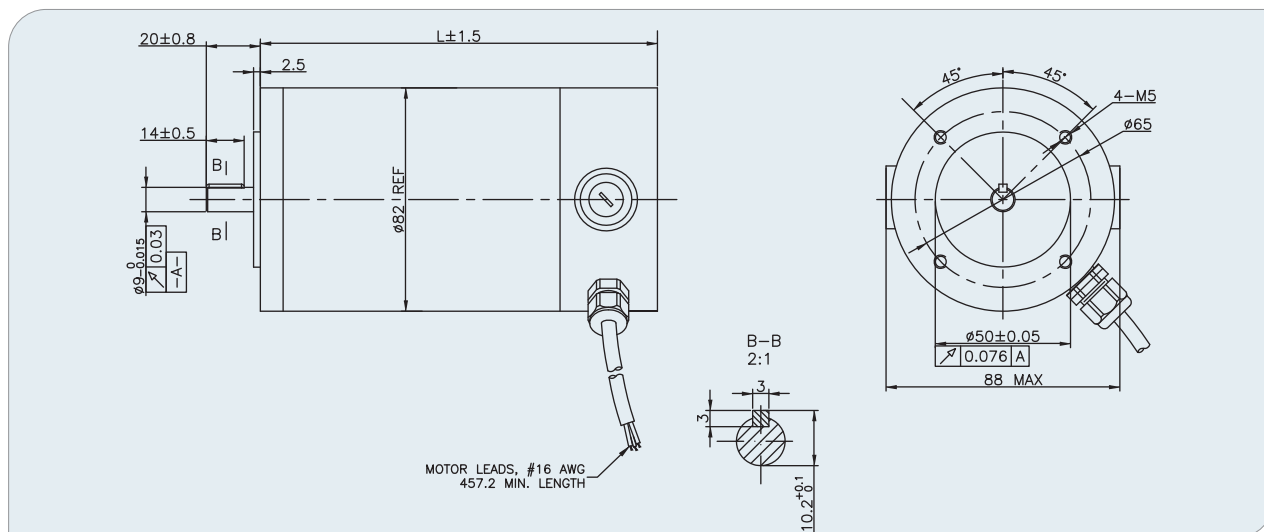

● Characteristic diagram

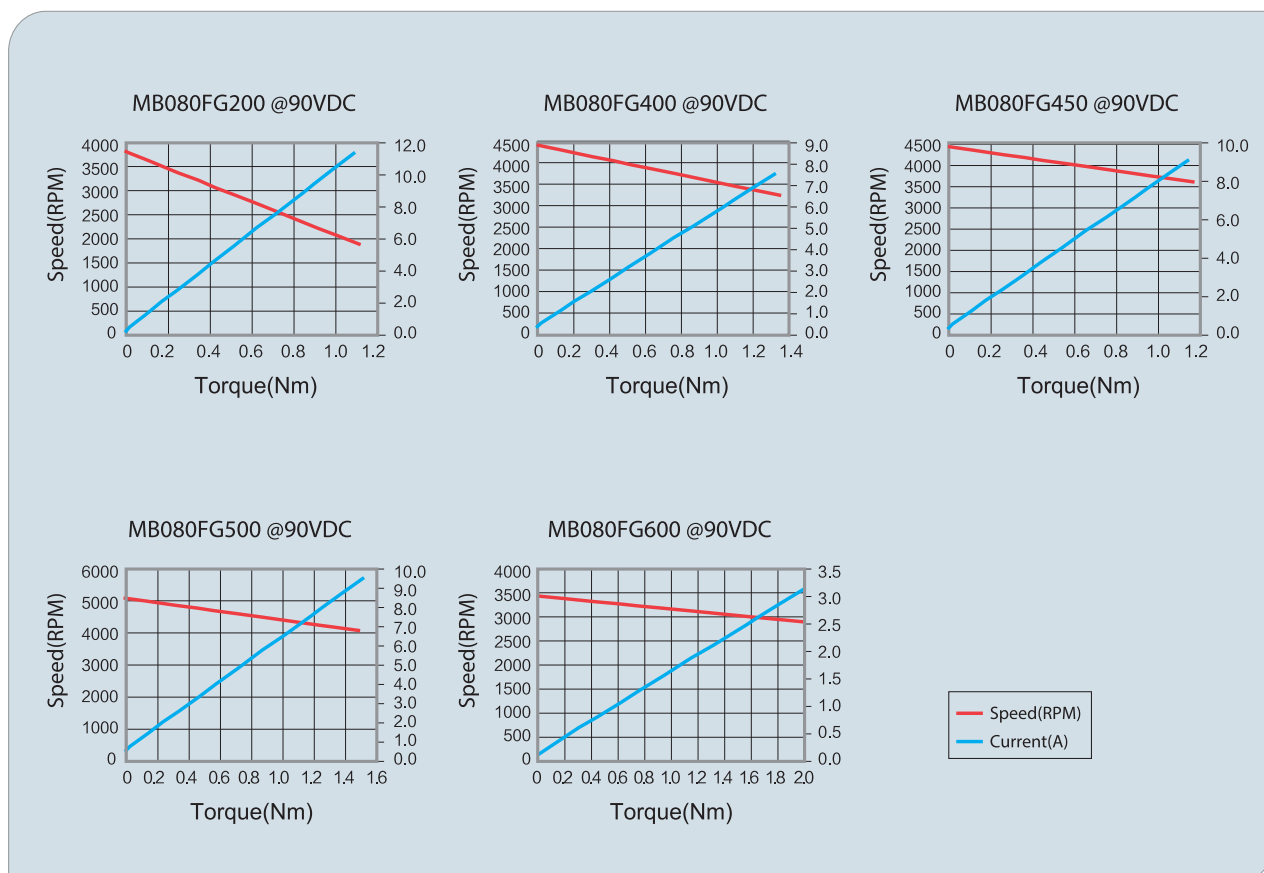

MB100FG

DC Brush Motor



● General information


- IEC34-1 Standard Flange
- Magnet material: Hard Ferrite
- Number of Poles: 4
- Insulation class B, higher insulation on request
- Suitable for low voltage battery-operated application

● Specifications

SPECIFICATION		MB100FG100	MB100FG200	MB100FG300
Voltage	(V)	48	48	48
No Load Speed	(RPM)	3600	3600	3600
Rated Torque	(Nm)	0.9	1.6	2.1
Rated Speed	(RPM)	3100	3100	3100
Rated Current	(A)	8.5	15	19
Stall Torque	(Nm)	8	20	28
Rotor Inertia	(Kg.cm ²)	7	14	18
Ke	(V/KRPM)	12	12	12
Torque Constant	(Nm/A)	0.115	0.115	0.115
Resistance	(OHMS)	0.6	0.23	0.17
Weight	(Kg)	3.8	4.3	5
L	(mm)	125	158	178

MB100FG

● Mechanical

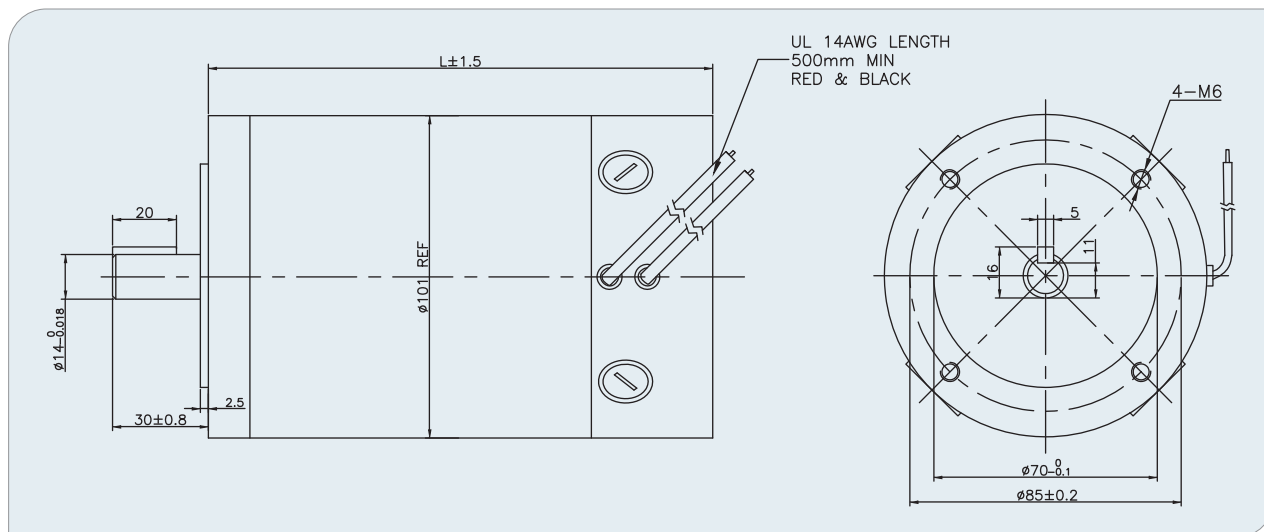

● Characteristic diagram

