





22006

- The cover of lamp is made of new PS material, it is U.V-proof , It is good transmittance
- The body of lamp is made of ABS material
- The clip is made of 304 stainless steel
- The pole is painting U.V-proof powder in the surface
- High quality aluminum reflector increase light reflection effect
- Protecting grade: IP65



Model	Power	Grade	Inner box	Master carton	Quantity	G.W.
22006	1x40W	IP65	37x18.5x12.8	78.5x38.5x28	8	7
	2x18W	IP65	37x18.5x12.8	78.5x38.5x28	8	7

应用于: 都市的道路, 公园, 广场和住宅的社区及其他
材料特性: 灯杆全采用防锈的热镀锌工艺, 填层厚度达到65um灯罩采用进口PMMA.

防护等级: IP54

防触电等级: I 级

光通量: 12000LM

寿命: 8000H

色温: 6400K

Apply: Urban roads, parks, plazas and residential communities, etc.

Material features:

1. The lamp pole is sprayed powder after hot galvanizing , the coating is even. And more than 65um thick.
2. The cover is made of PMMA.





Protecting grade: IP54

Grade against electric shock: class I

Luminous flux: 12000LM

Life: 8000H

Color Temperature: 6400K

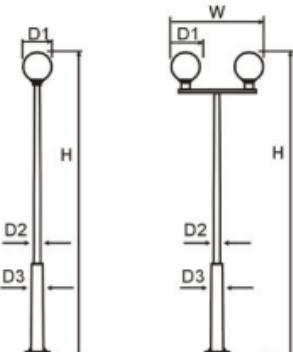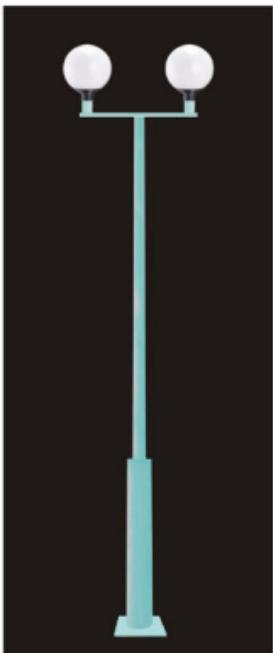

Model	Voltage	Power	Size(mm)
75022-1-400	220V/50Hz	Max:125W	H:4600 D1:400 D2:76 D3:140
75022-2-400	220V/50Hz	Max:2X125W	H:4600 D1:400 D2:76 D3:140 W:1200
75022-1-300	220V/50Hz	Max:60W	H:3500 D1:300 D2:76 D3:114
75022-2-300	220V/50Hz	Max:2X60W	H:3500 D1:300 D2:76 D3:114 W:900

Road light for the garden series



77C-21106




77C-21106-2

Number of Lamp
 Art.no. of garden light
 Type of Pole
 Lamp-pole series



21101



21106



21102



21107



21103



21108



21104



21109



21105

型号: 21101、21102、21103、21104、21105、
21106、21107、21108、21109

E27灯头配Max 150W金属卤化物灯泡或钠灯泡

E27/E40灯头配Max 75W紧凑型荧光灯泡

110~240V 50~60HZ IP43

材质: 灯体为铝材, 灯罩为PMMA塑料

应用场所: 广场和公园

Art. no. 21101, 21102, 21103, 21104, 21105.

21106, 21107, 21108, 21109


Max 150W for metal halide or sodium lamp with E27 lampholder

Max 75W for compact fluorescent bulb with E27/E40 lampholder


110~240V 50~60HZ IP43

Material: Aluminium and PMMA plastic

Apply for square and garden




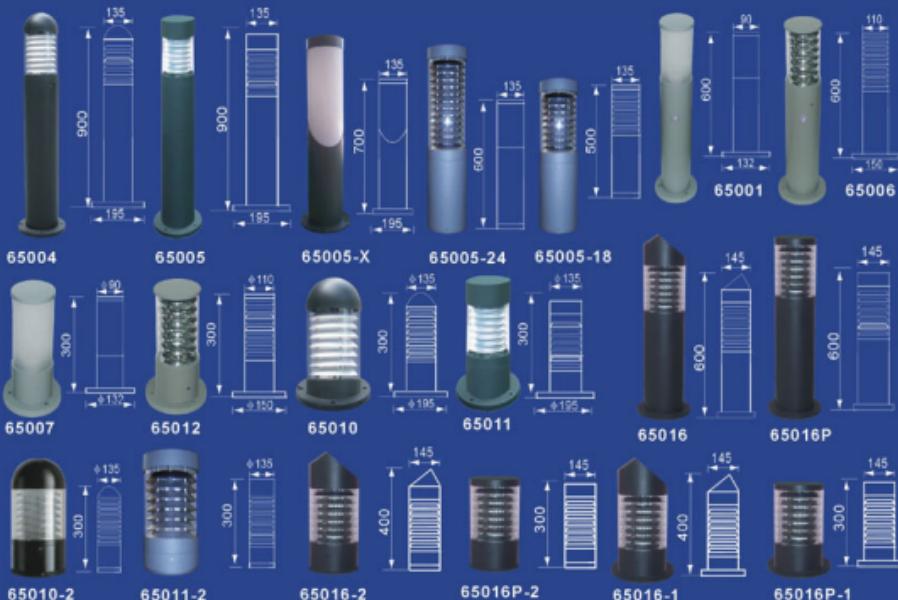


Art. No., 产品编号	Lampholder, Bulb & Power 灯头、光源和功率	IP 防护等级	Pcs/Box 装箱数量	N.W / G.W (KG) 净重/毛重	Carton Size(mm) 外箱尺寸	Material & Notes 材质及备注
65001		IP44	6	6.9/10.4	645x440x300	Aluminium and glass/PC. 铝型材和玻璃/PC。
65007	E27 Max 40W Max 15W	IP44	6		345x440x300	
65006		IP44	6	9.9/13.5	645x500x340	Aluminium and glass. 铝型材和玻璃。
65012	E27 Max 40W Max 15W	IP44	6		345x500x340	
65004 900mm		IP44	4	10.3/14.4	430x430x330	Aluminium and PMMA plastic. 铝型材和PMMA。
65010	E27 Max 70W Max 25W	IP44	4		430x430x330	
65010-2		IP44	4		430x430x330	
65005 900mm		IP44	4	10.8/15.6	635x430x930	Aluminium and PMMA plastic. 铝型材和PMMA。
65011	E27 Max 70W Max 25W	IP44	4		635x430x330	
65011-2		IP44	4		635x430x330	
65005-24 600mm	2G11 lampholder with 24W Ballast	IP44	6	12.4/15.5	635x430x630	Aluminium and PMMA plastic. 铝型材和PMMA。
65005-18 500mm	2G11 lampholder with 18W Ballast	IP44	6	11.8/14.8	635x425x530	
65016 600mm		IP44	4	12.4/15.5	655x450x630	Aluminium, PMMA or glass 灯体为铝型材，灯罩 为PMMA或玻璃。
65016-1	E27 Max 70W Max 25W	IP44	4		355x450x630	
65016-2		IP44	4		355x450x630	
65016P 600mm		IP44	4	12.4/15.5	655x450x630	Aluminium, PMMA or glass 灯体为铝型材，灯罩 为PMMA或玻璃。
65016P-1	E27 Max 70W Max 25W	IP44	4		355x450x630	
65016P-2		IP44	4		355x450x630	

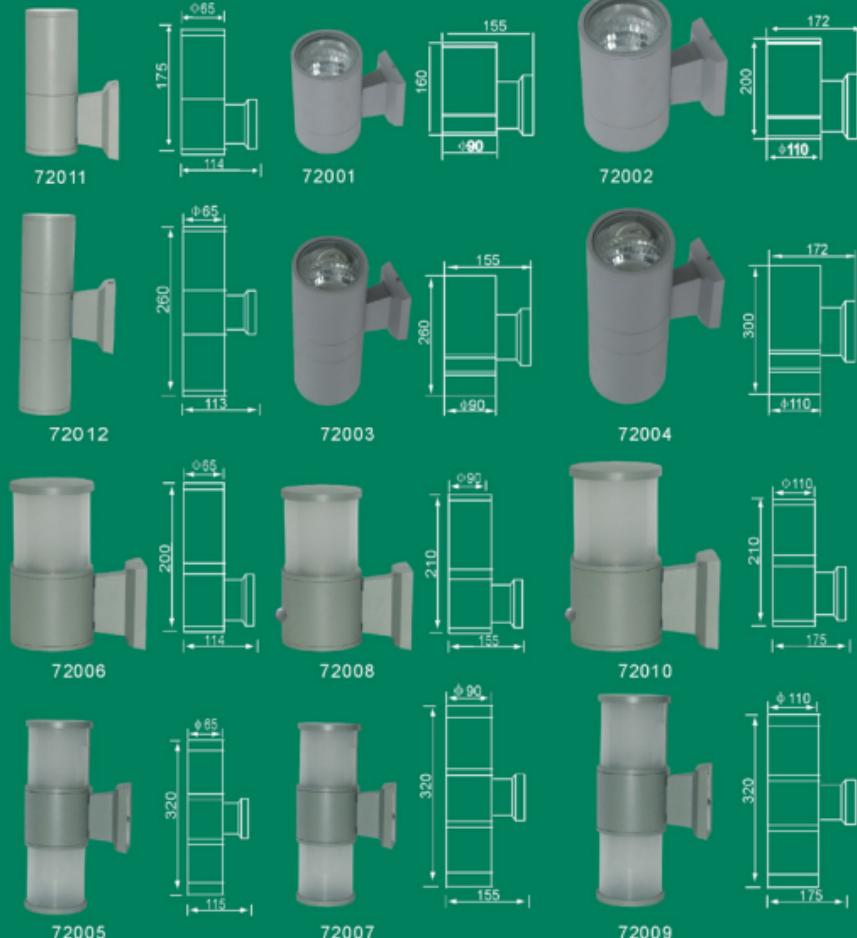
Aluminium projection light and wall lamp series 铝质射灯、壁灯系列

Art. No. 产品编号	Lampholder, Bulb & Power 灯头、光源和功率	IP 防护等级	Pcs/Box 装箱数量	N.W./G.W.(KG) 净重/毛重	Carton Size(mm) 外箱尺寸	Material & Notes 材质及备注
72001	E27 Max 40W	IP44	10	6.5/9.0	500x330x190	Aluminium for body, glass for lamp-shade. It can select without infrared sensor.
72002		IP44	10	8.9/11.4	570x390x230	
72003		IP44	10	9.8/12.8	500x350x290	
72004		IP44	10	12.5/15.5	595x390x330	
72011		IP44	10	5.2/7.5	325x255x205	灯体为铝型材，灯罩为 玻璃，灯具可以选择不 配感应器。
72012		IP44	10	6.3/8.8	370x255x285	
72005	E27 Max 40W	IP44	12	6.1/8.6	685x395x190	Aluminium for body, glass for lamp-shade. It can select without infrared sensor.
72006		IP44	12	4.3/6.5	430x380x190	
72007		IP44	12	9.5/12.0	630x515x250	
72008		IP44	12	7.1/9.6	665x350x250	
72009		IP44	12	11.8/14.3	665x580x280	
72010		IP44	12	9.7/12.2	685x375x280	

Aoyou Lighting Appliance Factory

Aluminium projection light and wall lamp series奥优照明电器厂
铝质射灯、壁灯系列

Art. No. 产品编号	Lampholder, Bulb & Power 灯头、光源和功率	IP 防护等级	Pcs/Box 装箱数量	N.W./G.W.(KG) 净重/毛重	Carton Size(mm) 外箱尺寸	Material & Notes 材质及备注
72013		IP54 G5.3 or GU10	10	10.5/13.0	550x235x265	
72014		IP54	16	11.6/14	445x235x320	
72015		IP54	10	10.5/13.5	580x245x265	
72016		IP54	16	12.0/15.0	465x245x325	
72021		IP54	10	9.2/11.5	580x290x265	
72022		IP54	10	11/13.5	465x290x355	
72017		IP54	8	13.5/16	490x375x325	
72018		IP54	10	11.5/13.7	610x375x230	
72019		IP54	8	10.0/12.5	425x345x290	
72020		IP54	16	12.5/15	425x345x355	
72023		IP54 Max 40W	10	8.8/11.5	505x345x290	Aluminium for body, glass for lamp-shade.
72024		IP54 Max 15W	12	8.1/10.9	680x350x260	
72025		IP54	12	10.2/14	680x520x260	
72026		IP54	12	9.75/12.9	680x390x290	
72027		IP54	12	12.5/17	680x575x290	

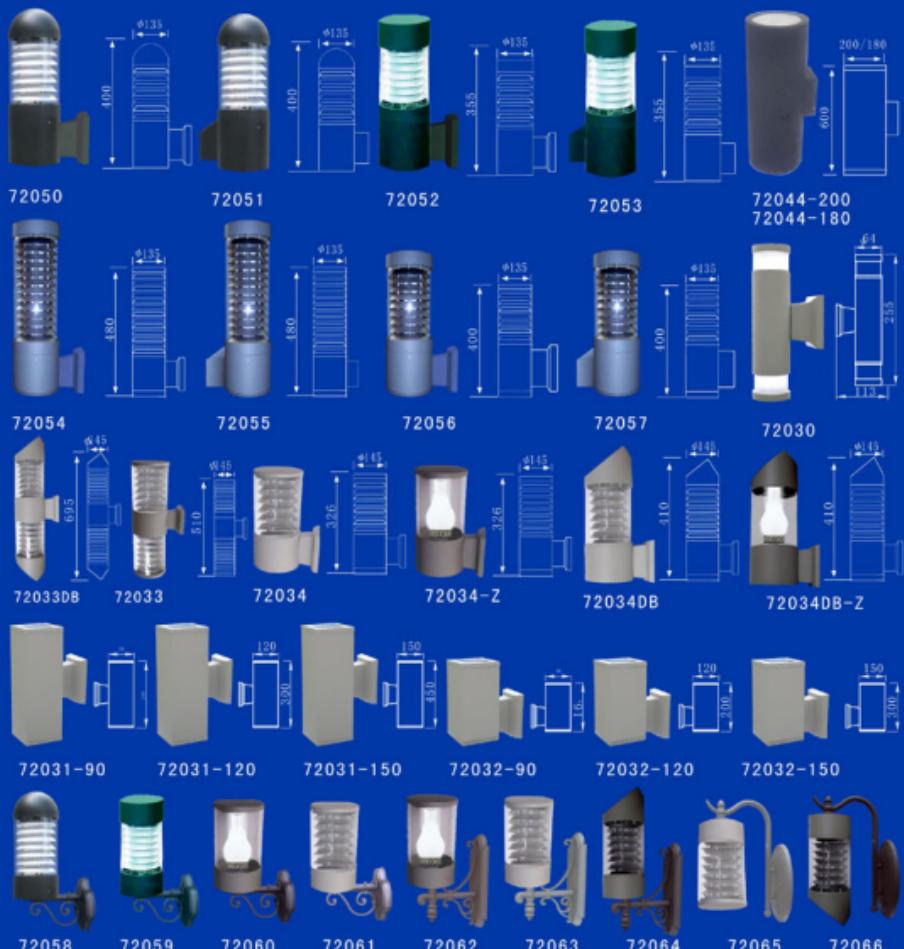

Lampholder, Bulb & Power	IP	Pcs/Box	Art. No..
R7X Max 70W	IP44	6	72044-200, 72044-180
E27 Max 40W Max 15W	IP44	6	72030, 72031-90, 72031-120, 72031-150, 72032-90, 72032-120, 72032-150
E27 Max 70W Max 25W	IP44	4	72050, 72051, 72052, 72053, 72034, 72034-Z, 72034DB, 72034DB-Z, 72058, 72059, 72060, 72061, 72062, 72063, 72064, 72065, 72066
2611 Lampholder with 24W Ballast	IP44	6	72054, 72055
2611 Lampholder with 18W Ballast	IP44	6	72056, 72057

**Specifications of infrared sensor:**

Detection distance: 4~8m (<22°C)
Detection range: 360°

Ambient light: <30Lux

Time-delay: 5sec to 5min

Rated load (max): 100W

Operating voltage: 230VAC

Power frequency: 50HZ

Sensor performance indicators:

Sensor distance: 4~8m (<22°C)

Scanning angle: 360°

Brightness: <30Lux

Delay time: 5s~5 minutes

Rated load: 100W

Working voltage: 230VAC

Voltage frequency: 50HZ



Art. No. 产品编号	Lampholder, Bulb & Power 灯头、光源和功率	IP 防护等级	Pcs/Box 装箱数量	N.W./G.W.(kg) 净重/毛重	Carton Size(mm) 外箱尺寸	Material & Notes 材质及备注
68001	E27	IP44	12	7.9/10.6	635x475x290	Stainless steel for body, PC plastic for lamp-shade. It can select without infrared sensor. 灯体为不锈钢，灯罩为 PC塑料。灯具可以选择 不配装感应器。
68002	E27	IP44	12	10.7/13.4	635x575x290	
68003	E27	IP44	10	5.0/7.0	420x175x490	
68004	E27	IP44	10	7.6/9.6	620x255x490	
68005	E27	IP44	10	6.7/8.7	685x280x495	
68006	Max 40W	IP44	10	8.9/10.9	685x280x495	Stainless steel for body, PC plastic for lamp-shade. It can select without infrared sensor. 灯体为不锈钢，灯罩为 PC塑料。灯具可以选择 不配装感应器。
68007	Max 15W	IP44	8	10.1/14.3	570x290x1030	
68008	Max 15W	IP44	8	12.3/16.4	570x290x1030	
68009	Max 15W	IP44	12	10.5/13.4	545x430x430	

Aoyou Lighting Appliance Factory
Stainless steel light series

奥优照明电器厂
不锈钢灯系列



68028



68022




68011

68012

68010

Art. No. 产品编号	Lampholder, Bulb & Power 灯头、光源和功率	IP 防护等级	Pcs/Box 装箱数量	N.W./G.W.(KG) 净重/毛重	Carton Size(mm) 外箱尺寸	Material & Notes 材质及备注
68010	E27	IP44	6	3.6/6.1	625x485x350	Stainless steel for body, PMMA plastic for lamp-shade. 灯体为不锈钢， 灯罩为PMMA塑料。
68011	Max 25W	IP44	6	3.2/5.7	635x430x340	
68012	Max 15W	IP44	6	4.0/6.5	625x595x340	
68022	Max 15W	IP44	10	12.1/15.1	305x730x625	

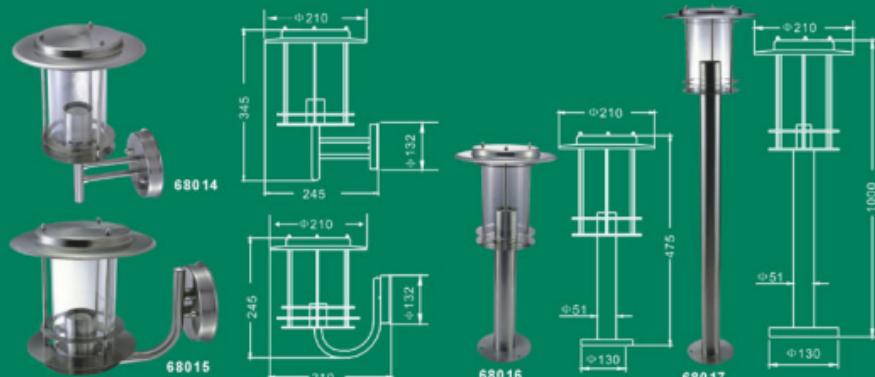


Art. No. 产品编号	Lampholder, Bulb & Power 灯头、光源和功率	IP 防护等级	Pcs/Box 装箱数量	N.W./G.W.(KG) 净重/毛重	Carton Size(mm) 外箱尺寸	Material & Notes 材质及备注
68014	E27	IP44	6	5.4/8.4	675x520x360	Stainless steel for body, PMMA plastic for lamp-shade. 灯体为不锈钢， 灯罩为PMMA塑料。
68015		IP44	6	4.9/9.0	675x630x270	
68016		IP44	6	5.8/8.3	675x455x515	
68017		IP44	6	8.2/12.3	675x455x1030	

Underground light series


地理灯系列



69001




69002



69003




69004



69005




69006




Art. No. 产品编号	Lampholder, Bulb & Power 灯头、光源和功率	IP 防护等级	Pcs/Box 装箱数量	N.W./G.W.(KG) 净重/毛重	Carton Size(mm) 外箱尺寸	Material & Notes 材质及备注
69001		IP67	6	8.5/11.0	545x360x280	Aluminum for body, toughened glass for lens-shade.
69002		IP67	6	8.3/10.8	545x360x260	压铸铝灯体， 强化玻璃灯罩。
69003	E27 Max 80W Max 25W	IP67	6	8.0/10.5	545x360x260	
69004		IP67	12	12.3/14.8	510x340x305	Aluminum for body, toughened glass for lens-shade.
69005	G5.3 or GU10 Max 50W	IP67	12	13.0/15.5	510x340x350	压铸铝灯体， 强化玻璃灯罩。
69006		IP67	12	12.8/15.3	510x340x305	



69007




69014



69017



69017



69018



69019



Art. No. 产品编号	Lampholder, Bulb & Power 灯头、光源和功率	IP 防护等级	Pcs/Box 装箱数量	N.W./G.W.(KG) 净重/毛重	Carton Size(mm) 外箱尺寸	Material & Notes 材质及备注
69018	 G5.3 or GU10 Max 50W	IP67	12	5.8/8.0	350x240x245	Stainless steel, toughened glass, and die-casting aluminum.
69019	220V~240V, Max 2W, 24LEDS, Single color or RGB change 24LEDS 蓝色或红绿蓝变光	IP67	12	6.3/8.5	350x240x245	不锈钢， 钢化玻璃和压铸 铝灯体。
69014	 G5.3 or GU10 Max 50W	IP67	12	14.0/16.5	545x370x310	Stainless steel, toughened glass, and die-casting aluminum.
69017	220V~240V, Max 4W, 60LEDS, Single color or RGB change 60LEDS 蓝色或红绿蓝变光	IP67	12	13.0/15.5	545x370x170	Stainless steel, toughened glass, and die-casting aluminum.
69007	 RX7S Max 150W	IP67	4	17.2/20.2	515x515x315	不锈钢， 钢化玻璃和压铸 铝灯体。



11001

Model	Size	Power	IP
11001-14	615X47 mm	T5 14W	IP65
11001-21	920X47 mm	T5 21W	IP65
11001-28	1225X47 mm	T5 28W	IP65



11002

Model	Size	Power	IP
11002-14	590X75 mm	T5 14W	IP65
11002-21	895X75 mm	T5 21W	IP65
11002-28	1200X75 mm	T5 28W	IP65

Underwater light series

水下灯系列



Art. No. 产品编号	Lampholder, Bulb & Power 灯头、光源和功率	IP 防护等级	Pcs/Box 装箱数量	N.W./G.W.(KG) 净重/毛重	Carton Size(mm) 外箱尺寸	Material & Notes 材质及备注
64001		IP68	12	11.0/13.0	305x275x400	Stainless steel and toughened glass.
64002		IP68	12	10.6/12.6	305x275x340	不锈钢和钢化玻璃。
64007	G5.3 or GU10 Max 50W	IP68	12	11.0/13.0	305x345x400	
64004	12V, Max 2W, 24 LEDs, Single color or RGB change	IP68	12	12.4/14.4	305x275x400	Stainless steel and toughened glass.
64005	24 LEDs, Single color or RGB change	IP68	12	11.5/13.5	305x280x340	不锈钢和钢化玻璃。
64008	24 LEDs, 单色或RGB变光。 12V, Max 4W, 60 LEDs, Single color or RGB change, 60 LEDs, 单色或RGB变光。	IP68	12	12.4/14.4	305x345x400	Stainless steel, glass and aluminum. 不锈钢，玻璃和铝。
64006	12V, Max 4W, 60 LEDs, Single color or RGB change, 60 LEDs, 单色或RGB变光。	IP68	12	16.8/19.0	540x360x300	Stainless steel, glass and aluminum. 不锈钢，玻璃和铝。
78001	Electronic or magnetic, Max 50W Input:110~240V 50/60Hz, Output:12V 电子电器变压器, Max 50W 输入: 110~240V 50/60Hz, 输出: 12V	IP65	12	6.8/8.8	500x345x170	Aluminium for body, Stainless steel for accessory. 外壳为压铸铝, 装配部件 为不锈钢。

66016
(Max. 45W)66017
(Max. 45W)66018
(Max. 45W)66019
(Max. 45W)66034
(Max. 65W)66033
(Max. 65W)66028
(Max. 65W)66031
(Max. 45W)66020
(Max. 45W)66021
(Max. 65W)66022
(Max. 45W)66023
(Max. 45W)66029
(Max. 65W)66030
(Max. 45W)

66024(Max. 45W)



66025(Max. 65W)



66026(Max. 45W)



66027(Max. 65W)



66032(Max. 65W)



66014(Max. 65W)



66013(Max. 65W)



66007(Max. 45W)

PLC
E27/E40

83014

Apply:

1. Botanical garden, street, square, park, fencing, corridor.

Material features:

1. The aluminium alloy light of die casting has body, the surface adopts the antiultraviolet static to gush out the powder.

2. Glass surface is transparent or seedy.

Protecting grade: IP43

Grade against electric shock: class I

Sensing rate: 2~30 Lux

FEATURE:

Automatically turn light on at dusk
automatically turn light off at dawn

indoor/outdoor use

Suitable for incandescent &

Fluorescent lights

应用:

适合于庭院，街道，广场，公园，走廊。

材质:

1. 压铸铝合金灯体，表面采用抗紫外线
喷粉处理。

2. 灯罩为透明或磨砂玻璃。

防触电等级：I类

传感率：2~30勒克斯




特点:

天黑自动亮灯

天亮自动关灯

室内或户外均可使用

适用于普通白炽灯，节能灯



Model	Voltage	Power	Size (mm)	Master carton (mm)	Quantity	G.W.
83014	220V/50Hz	2X60W	H:562 L:233 W:Φ200	320x265x595	1	3.2kg
83014	110V/60Hz	2X60W	H:562 L:233 W:Φ200	320x265x595	1	3.2kg

83002-3

Apply:

1. Botanical garden, street, square, park, fencing, corridor.

Material features:

1. The aluminium alloy light of die casting has body, the surface adopts the antiultraviolet static to gush out the powder.

2. Glass surface is transparent or seedy.

Protecting grade: IP43

Grade against electric shock: class I

Sensing rate: 2~30 Lux

FEATURE:

Automatically turn light on at dusk automatically turn light off at dawn indoor/outdoor use

Suitable for incandescent &

Fluorescent lights

应用:

适合于庭院，街道，广场，公园，走廊。

材质:

1. 压铸铝合金灯体，表面采用抗紫外线喷粉处理。

2. 灯罩为透明或磨砂玻璃。

防触电等级: I类

传感率: 2~30勒克斯



特点:

天黑自动亮灯

天亮自动关灯

室内或户外均可使用

适用于普通白炽灯，节能灯



Model	Voltage	Power	Size (mm)	Master carton (mm)	Quantity	G.W.
83002-3	220V/50Hz	60W	H:250 L:195 W:145	1025x315x510	10	11kG
83002-3	110V/60Hz	60W	H:250 L:195 W:145	1025x315x510	10	11kG

83002-7

Apply:

1. Botanical garden, street, square, park, fencing, corridor.

Material features:

1. The aluminium alloy light of die casting has body, the surface adopts the antiultraviolet static to gush out the powder.

2. Glass surface is transparent or seedy.

Protecting grade: IP43

Grade against electric shock: class I

Sensing rate: 2~30 Lux

FEATURE:

Automatically turn light on at dusk automatically turn light off at dawn indoor/outdoor use

Suitable for incandescent &

Fluorescent lights

应用:

适合于庭院，街道，广场，公园，走廊。

材质:

1. 压铸铝合金灯体，表面采用抗紫外线喷粉处理。

2. 灯罩为透明或磨砂玻璃。

防触电等级: I类

传感率: 2~30勒克斯




特点:

天黑自动亮灯



天亮自动关灯

室内或户外均可使用

适用于普通白炽灯，节能灯



Model	Voltage	Power	Size(mm)	Master carton(mm)	Quantity	G.W.
83002-7	220V/50Hz	60W	H:425 L:240 W:145	1250x300x860	10	12.5kg
83002-7	110V/60Hz	60W	H:425 L:240 W:145	1250x300x860	10	12.5kg

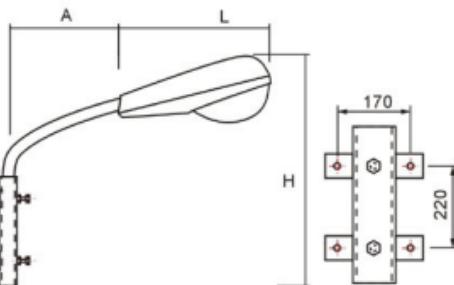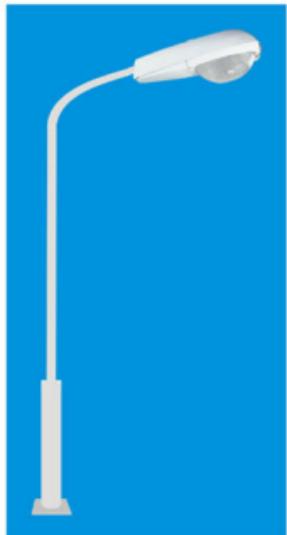

应用于：停车场、街道、城市道路、墙面立柱。
材料特性：

灯体采用压铸铝一次压铸而成，表面静电喷粉处理，灯罩采用5mm弧形强化玻璃。硅橡胶环形密封圈，反光罩采用高纯度铝板及阳极氧化抛光拉伸成型，灯杆采用热镀锌喷粉。

防护等级：IP65

防触电等级：I 级

光通量：28000LM

寿命：24000H

色温：2700K

标准：GB7000.7-1996

Pour :
Parking,Rue,Rue urbaine, Tuteurage de parement.

Caractristique des matriaux :

1. Body is made of die casting aluminum shell, spraying plastics surface by electrostatic method;
2. Imported high-pure aluminum reflector;
3. Stainless steel fastener;
4. Sealing loop of silicon gasket;
5. Hermetic strip of heat-resisting silica gel;
6. The color is made of 5mm thick strengthened glass.
7. The lamp pole is sprayed powder after hot galvanizing

Protecting grade: IP65



Grade against electric shock: class I

Luminous flux: 28000LM

Life: 24000H

Color Temperature: 2700K

Standard: GB 7000.7-1996



3000mm



3500mm



3500mm



86004-83051S

86004-83051L

86005-02-83051S-2

86005-02-83051L-2

86005-02-83051S-3

86005-02-83051L-3

POWER: 10W/40W
GRADE: IP43
LAMP HOLDER: E27

E27 
E27 



86003-01-39007-3

86003-01-39007-3D

86004-01-39007-3


86004-01-39007-3D

Globe light series



6"
8"

39005



MODEL: 39005
POWER: 6"/15W , 8 "/25W
GRADE: IP43
LAMP HOLDER: E27




39009-2U



6"
8"

39006



MODEL: 39006
POWER: 6"/15W , 8 "/25W
GRADE: IP43
LAMP HOLDER: E27




39009-2U



10"

39007



MODEL: 39007
POWER: 10"/40W
GRADE: IP43
LAMP HOLDER: E27




39009-2U



10"

39008



MODEL: 39008
POWER: 10"/40W
GRADE: IP43
LAMP HOLDER: E27




39009-2D




10"

39009



MODEL: 39009
POWER: 10"/40W
GRADE: IP43
LAMP HOLDER: E27



MODEL: 39009-2U/39009-2D
POWER: 10"/40W
GRADE: IP43
LAMP HOLDER: E27

Lantern light series

JXFUL™ Germany technology

83001



83001-1



83001-2



MODEL: 83001
POWER: 60W
GRADE: IP43

E27
E27



83001-3

83001-4



83002-1



83002-2

83002



83002-7

83002-8



83002-3



83002-4

83002



83002-5

83002-6



83005-1



83005-2

83005



MODEL: 83005
POWER: 60W
GRADE: IP43



83005-3



83005-4



83004-1



83004-2

83004



83003-1



83003-2




Flood light series

JXEFUL™ Germany technology



62002




MODEL: 62002
POWER: 250/400W
GRADE: IP65
LAMP HOLDER: E40

NG / E40
MH / E40



62003

62003-C



MODEL: 62003
Power: 250/400W
Grade: IP65
Lamp holder: E40


MODEL: 62003-C
Power: 3x75W
Grade: IP65
Lampholder: E27

NG / E40
MH / E40

E27
E27



62004




MODEL: 62004
Power: 70/150W
Grade: IP65
Lamp holder: E27/R7S

NG, MH / E27
NG, MH / R7S



62005




MODEL: 62005
Power: 70/150W
Grade: IP65
Lamp holder: E27/R7S

NG / E27
MH / E27
HPL / E27
MH / R7S
NG / R7S



62006



MODEL: 62006
Power: 70W/150W
Grade: IP65
Lamp holder: R7S

NG / R7S
MH / R7S



SODIUM LAMP
(TUBBY LAMP)



METAL HALIDE LAMP
(TUBBY LAMP)



METAL HALIDE LAMP
(DOUBLE LAMP)




METAL HALIDE LAMP
(UMBONATE LAMP)

Model	Lamp holder	Power
METAL HALIDE LAMP (GLOBE LAMP)	E27	70W
	E27	150W
	E40	250W
	E40	400W
METAL HALIDE LAMP (TUBBY LAMP)	E27	70W
	E27	150W
	E40	150W
	E40	250W
	E40	400W
METAL HALIDE LAMP (DOUBLE LAMP)	E40	1000W
	R7S	70W/150W
SODIUM LAMP (DOUBLE LAMP)	R7S	70W/150W
SODIUM LAMP	E27	70W
	E40	150W
	E27	150W
	E40	250W
	E40	400W
MERCURY LAMP	E27	125W
MERCURY LAMP	E40	250W



METAL HALIDE LAMP
(GLOBE LAMP)

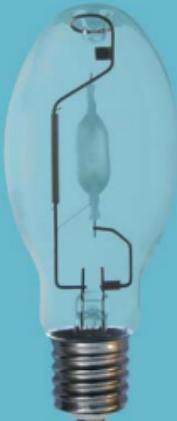


METAL HALIDE LAMP
(GLOBE LAMP)

IGNITOR / CAPACITOR



CAPACITOR 8uF-32uF



IGNITOR
70-400W



IGNITOR
70-400W



IGNITOR
35-150W

BALLAST



70~400W BALLAST FOR
HIGH-PRESS SODIUM LAMP



70~400W BALLAST FOR METAL HALIDE LAMP