32-tap FIR: larger blocks amortize accelerator setup

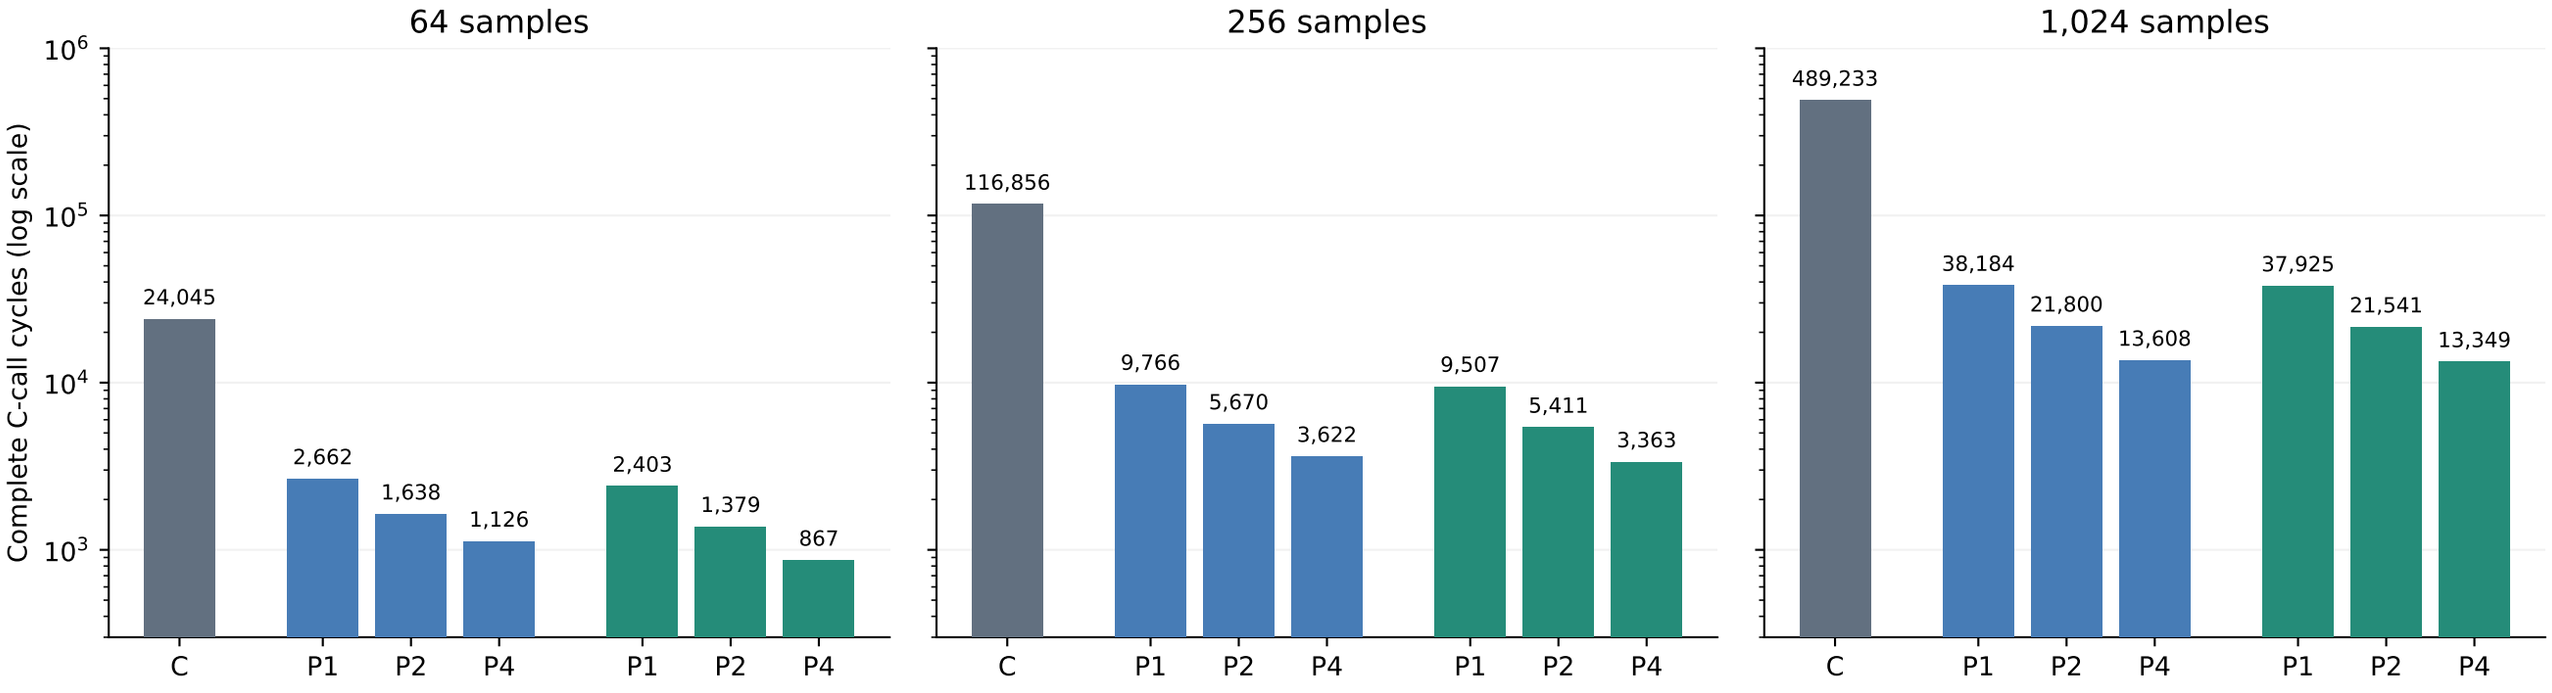

Same CPU, compiler flags and initial RAM per block length. Functional RTL cycles; no added DMA wait.

C reference Cold call (load coefficients) Resident coefficients