

Root = DIP-8 adapter board; reuse clock_3102_cd4047.kicad_sch as a sheet in any host


Sheet: /
File: fx-MN3102DropIn.kicad_sch

Title: MN3102 drop-in clock - CD4047B

Size: USLetter | Date: 2026-08-08
KiCad E.D.A. 10.0.4

Rev: A
Id: 1/2

CD4047B astable = drop-in for MN3102 (same pin roles as MN3102 DIP-8):
OX1 = RC common (4047 p3), OX2 = R-drive (p2), OX3 = C-drive (p1)
Self-osc: R from OX2 to OX1, C from OX3 to OX1: $f_{CP} = 1/(4.4 R C)$, Q/-Q 50% duty
Current-driven hosts (Julia/Caesar): OX2 open, C OX3-OX1, LFO current into OX1
VGG_OUT = $VDD * 15/16$ (-14/15 VDD) for BBD VGG pin (MN3207 p4)

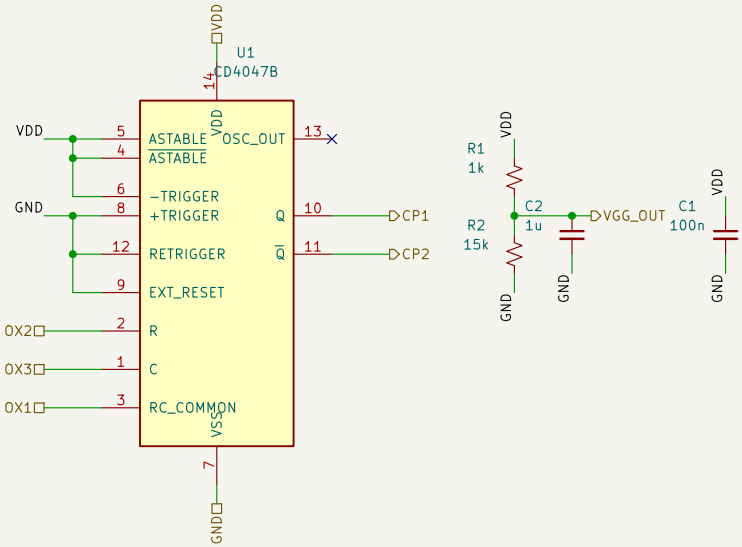

Sheet: /MN3102 drop-in (CD4047)/
File: clock_3102_cd4047.kicad_sch

Title:

Size: USLetter

Date:

Rev:

KiCad E.D.A. 10.0.4

Id: 2/2