
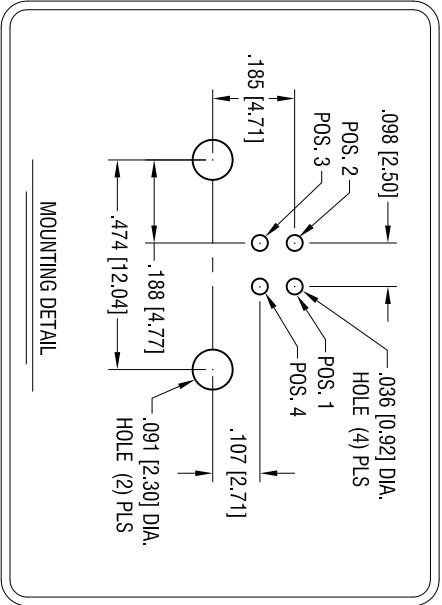


DATE	DESCRIPTION	REV.
8.17.99	CHANGE AS PER ECN 99-059	A
10.21.02	CHANGE AS PER ECN 02-069	B
6.8.05	CHANGE AS PER ECN 05-034	C
12.17.09	CHANGE AS PER ECN 09-190	D
3.10.11	CHANGE AS PER ECN 11-036	E

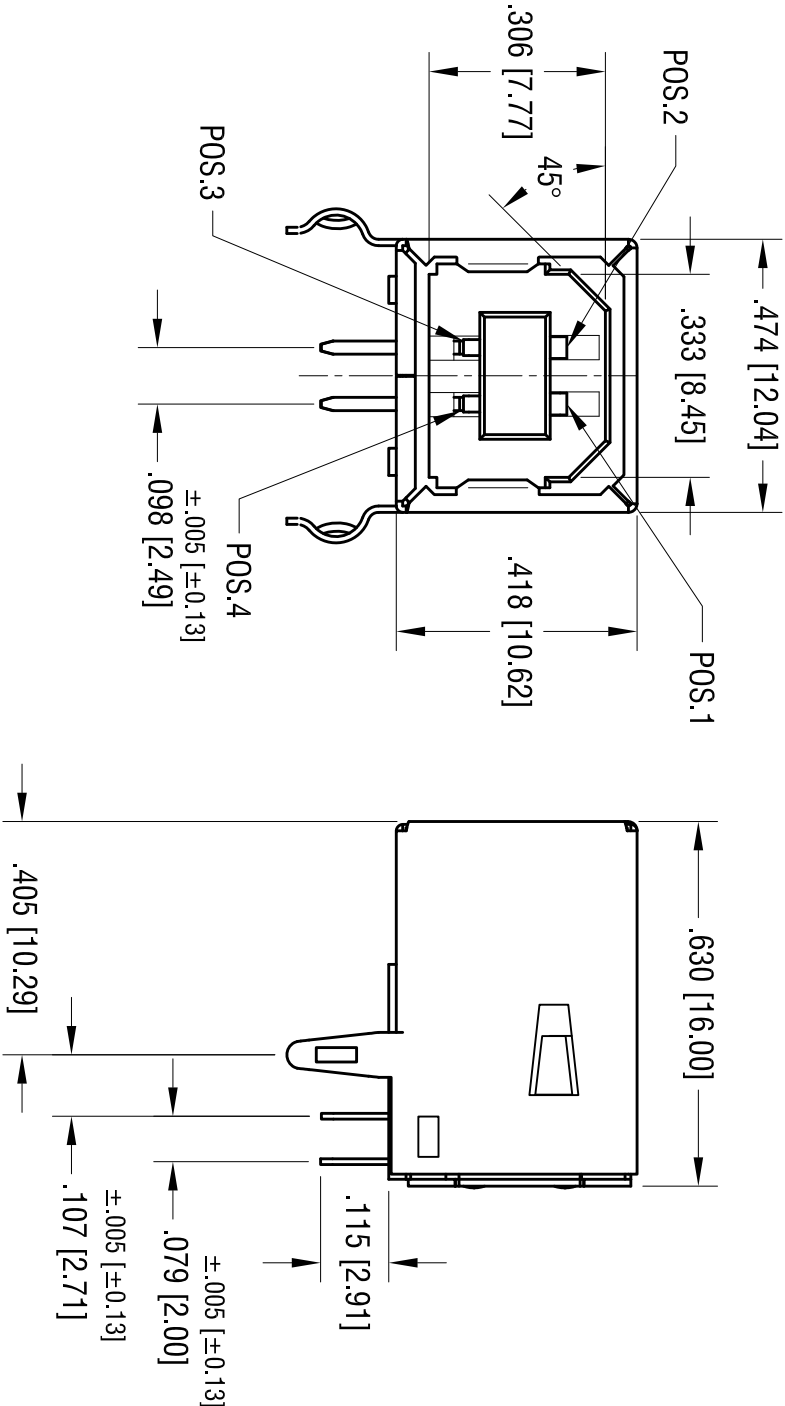

Notes:

Materiall:

Shell: Mat'l- Phosphor Bronze

Finish: Tin plate, over Nickel Plate

Insulator: PBT

Contacts: Phosphor Bronze

Finish:

Contact Area: Gold Plate over Nickel Plate

on Solder Tail: Tin Plate over Nickel Plate

Electrical Specifications


Rated Voltage: 30V AC (rms)

Contact Current Rating: 1 A Max.

Contact Resistance: 30 milliohms Max.

Dielectric Withstanding: 750V AC

Operating Temperature: -55°C to 85°C



<b>KEYSTONE ELECTRONICS CORP.</b>			
www.keystec.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900			
PART NAME			
USB B-TYPE HORIZONTAL SOCKET			
MATERIAL			
AS NOTED			
FINISH		DRN BY	DATE
AS NOTED		BOONE	6.18.98
TOLERANCES		APPD	SCALE
INCH		LN	3X
DECIMAL			
± .010 [± 0.25 ]			
ANGULAR			
± 1°			
UNLESS OTHERWISE SPECIFIED			
		CODE	DWG NO.
		C/M	924

THIS DOCUMENT IS THE PROPERTY OF  
KEYSTONE ELECTRONICS CORP. AND  
SHALL NOT BE REPRODUCED, DISTRIBUTED  
OR USED AS A BASIS FOR MANUFACTURE  
WITHOUT PRIOR WRITTEN PERMISSION  
FROM KEYSTONE ELECTRONICS CORP.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Keystone Electronics:](#)

[924](#)