




僅供參考



SPECIFICATION: ①

Contact rating: 1.6A/30VDC; 4A/12VDC

Initial contact resistance: 30mΩ(MAX.) 500VDC


Terminal to terminal & Housing dielectric withstand voltage:
500vac/0.5mA-1 minute

Electrical life: 5,000 cycles min.

Operation force for the socket: 350±150gf

RoHS & Lead Free

ELECTRICAL SCHEMATIC



MATERIAL:

HOUSING: PC,UL94V0 BK






ROCKER: PC,UL94V0 BK

PIN: BRASS,NICKEL PLATED


PIN TERMINAL: BRASS,NICKEL PLATED TIN

BREAK TERMINAL: BRASS,Ag PLATED

TIP TERMINAL: STAINLESS STEEL,Ag PLATED

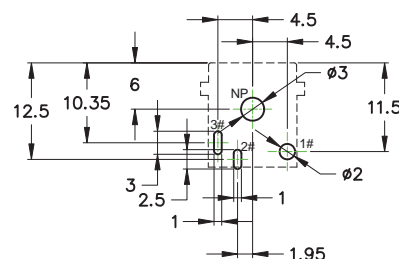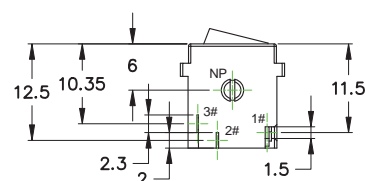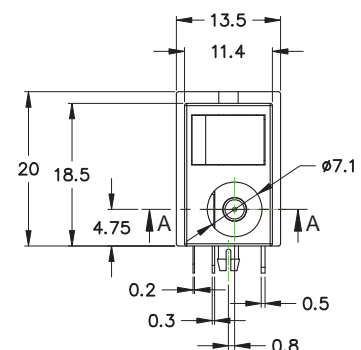

PCB LAYOUT
BOOTOM VIEW



PANEL CUT-OUT

德利威電子股份有限公司
DAILYWELL ELECTRONICS CO.,LTD.

符號	原尺寸	修改後尺寸	變更日期	SCALE(比例): 1:1	TITLE 圖名	DC POWER JACK WITH SWITCHES	SIZE 圖紙	A4
1	①	2.9尺寸設變為2.5, 1.5A設變為1.6A	OCT-11-2016	TOLERANCE(公差): 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR:± 5° FILE NAME : TEST-1337	DWG NO. 圖號	HRJ_TEST	UNIT 單位	mm
2	②				REV. 版本	R02	DATE 日期	SEP - 30 - 2016
3	③				CHECKED BY 審核	陳燈財	DRAWN BY 製圖	IRENE
4	④							
5	⑤							