




NOTES: UNLESS OTHERWISE SPECIFIED

1. DIMENSIONS: ALL DIMENSIONS ARE IN MILLIMETERS (MM).
2. APPLICABLE STANDARDS/SPECIFICATIONS:
ASME Y14.5M-1994, DIMENSIONS AND TOLERANCING.
ASME Y14.38-1999, ABBREVIATIONS AND ACRONYMS.
3. MATERIAL: SEE TABLE IN FULL ASSEMBLY DRAWING.
4. TOLERANCING: +/- 0.0254 MM (+/- 0.001 INCHES) OR BETTER.
5. REMOVE BURRS AND BREAK EXTERIOR SHARP EDGES.
6. CLEANING: ULTRA-HIGH VACUUM (UHV) COMPATIBLE PART CLEANING REQUESTED.
7. HANDLING & PACKAGING: SEMICONDUCTOR GRADE AND/OR UHV COMPATIBLE.
8. FLATNESS: +/- 0.000127 MM (+/- 0.0005 INCHES) OR BETTER.
9. SURFACE FINISH (Ra): 1.6 MICRONS (63 MICRO-INCHES) OR BETTER.

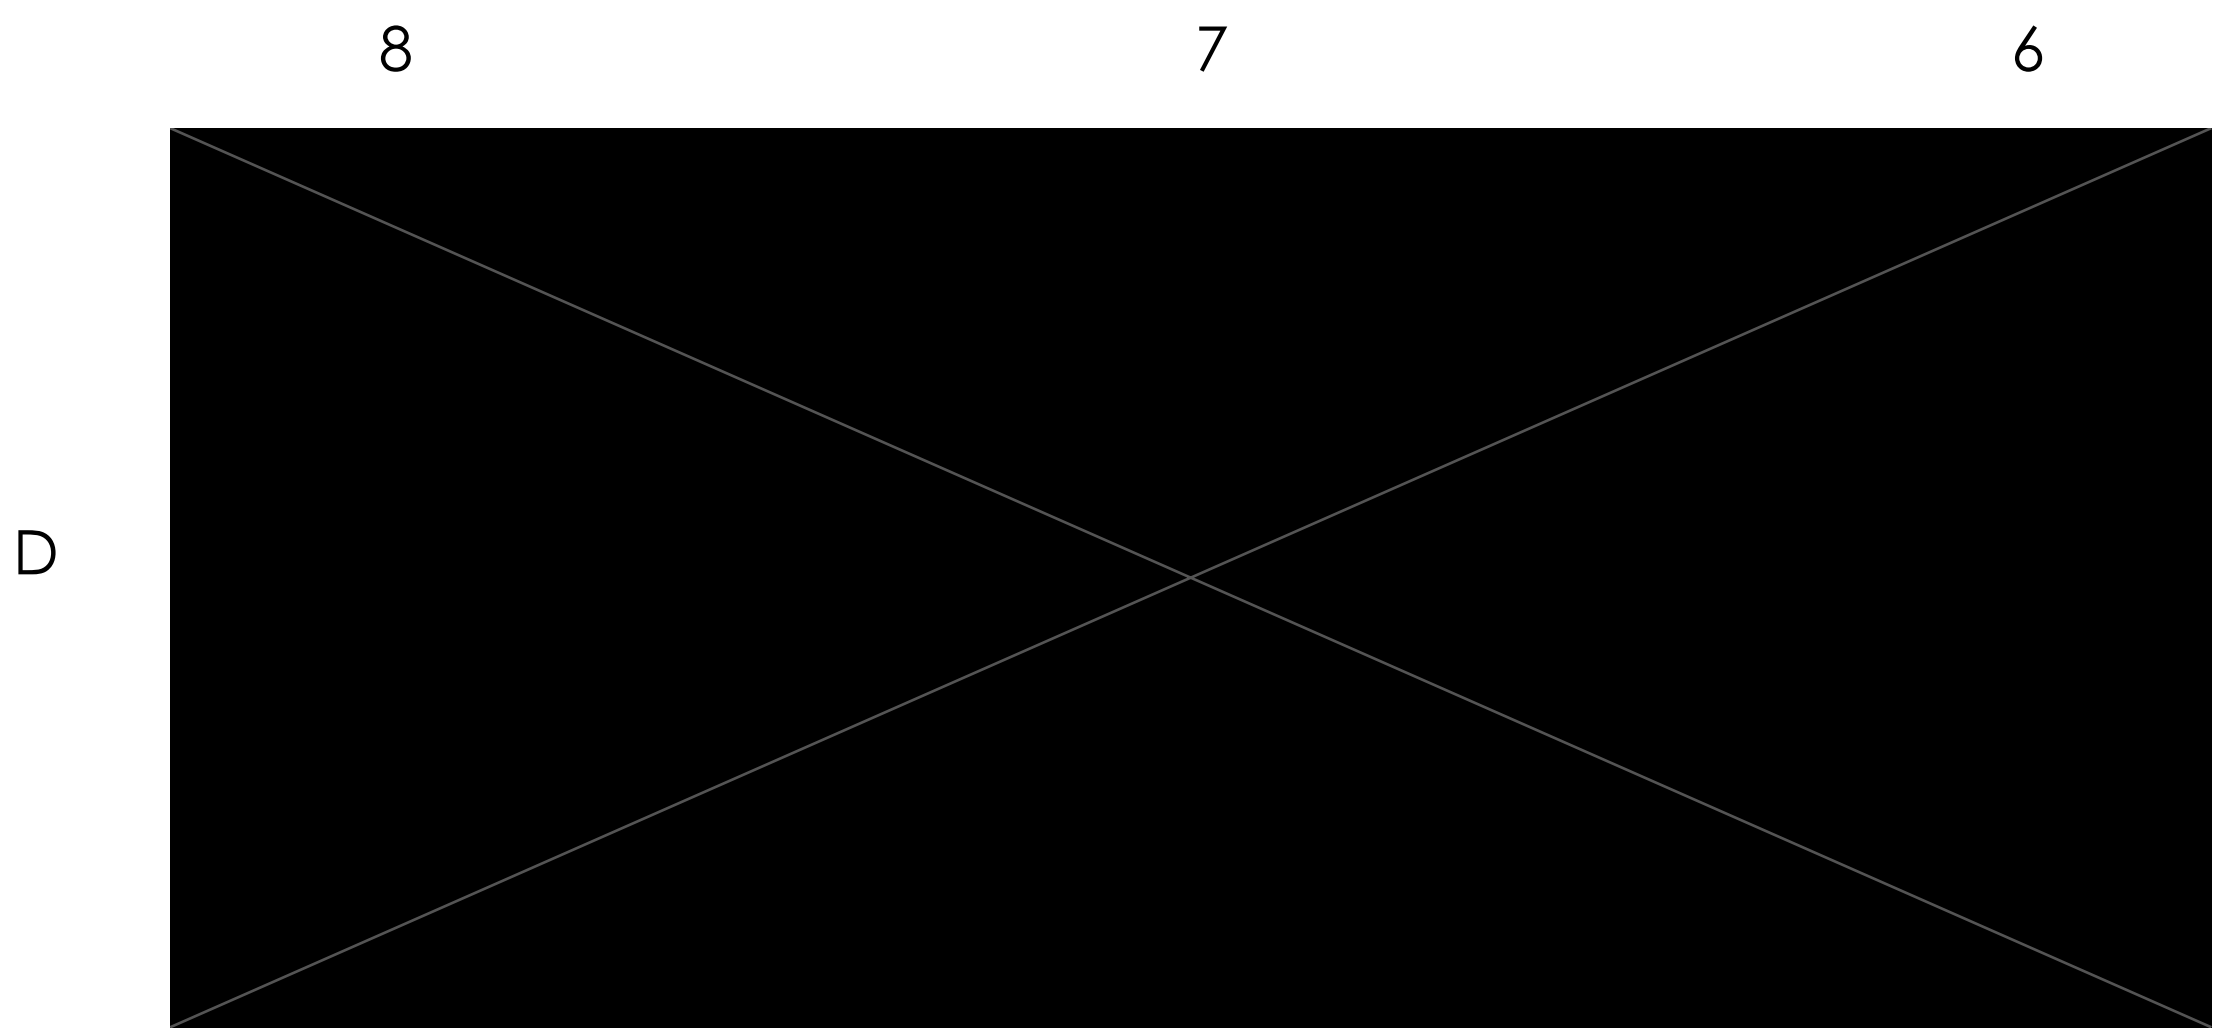