



PVC & HDPE PIPE

Product Catalog



Atkore®

Table of Contents

PVC



Pressure Rated Pipe

- 8** C900 Pressure Pipe
- 9** Schedule 40 Pressure Pipe
- 10** Schedule 40 Pressure/DWV Pipe
- 11** Schedule 80 Pressure Pipe
- 12** IPS SDR Solvent-Weld Pressure Pipe
- 14** IPS SDR Gasketed Pressure Pipe
- 16** PIP Gasketed Pressure Pipe
- 17** Well Casing Pipe




Sewer Pipe

- 18** Gasketed Gravity Sewer Pipe
- 20** Solvent-Weld Sewer Pipe



Drainage Pipe


- 21** ASTM D2729
- 22** ASTM D3034
- 23** Schedule 40 IPS Perforated Pipe



Natural Gas Sleeving Pipe

- 24** Sleeve-It™ PVC
- 25** PVC Truck Loading Chart

HDPE



Water-Line™ Water Pipe

- 30** Crystal-Line™ Potable Water, Reclaimed Water & Sewer
- 31** Base-Line™ Mining
- 32** Fire Protection



Stream-Line™ Oil & Gas Pipe

- 33** HDPE F2619
- 34** Size Availability Chart.
- 44** HDPE Truck Loading Chart

Product availability differs by region. Reach out to your sales representative for more information.


About



Atkore (NYSE: ATKR) is a global manufacturer of industrial products with 5,000+ employees and 50 manufacturing and distribution plants. Atkore produces a wide range of PVC and HDPE pipe products for Municipal Waterworks, Plumbing, Irrigation, Oil & Gas, Natural Gas, Industrial, and Electrical applications through the Heritage Plastics and United Poly Systems brands.

With our expansive product offerings, large network of manufacturing locations, and relentless focus on our customer service, we provide an end-to-end solution for water infrastructure projects. Atkore pipe is proudly made in the U.S.A. and is Build America, Buy America compliant.

PVC & HDPE Pipe Plant Locations

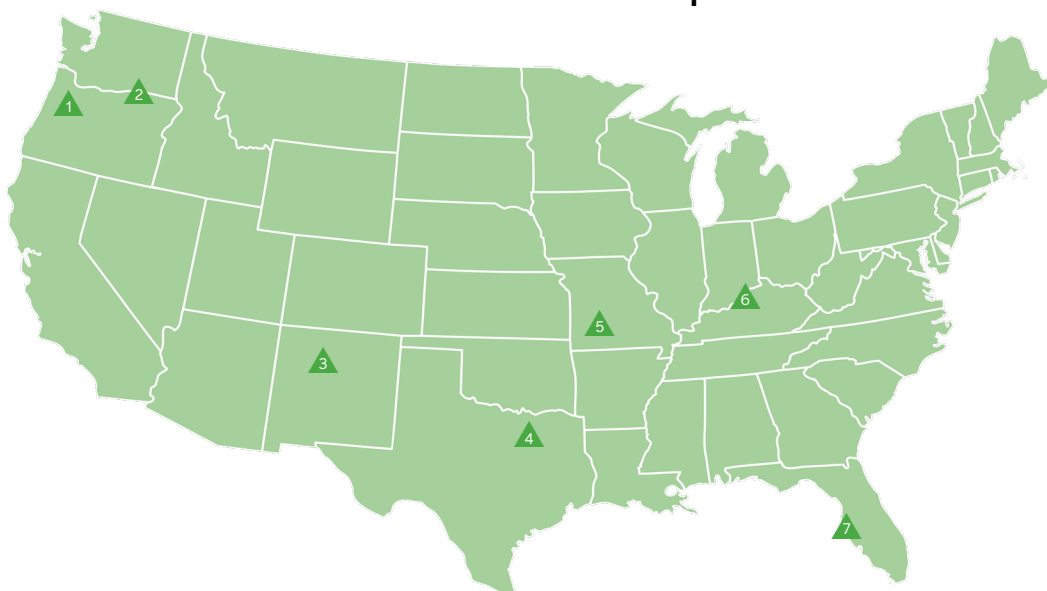

- ▲ Eugene, OR
- ▲ Pendleton, OR
- ▲ Albuquerque, NM
- ▲ Dallas, TX
- ▲ Springfield, MO
- ▲ Louisville, KY
- ▲ Tampa, FL



Sustainability



Atkore's focus on sustainability can be seen in every facet of our operations: from achieving the ESG goals we set toward reducing carbon and GHG emissions two years ahead of our target, to our dedication to increasing energy efficiency at our plants, through the continued development of our climate risk management strategy.

In 2023, we were recognized by Newsweek as one of America's Greenest Companies, were included in USA Today's list of America's Climate Leaders, and received the Ecovadis Bronze Sustainability Rating for the second year in a row.



Learn more about
Atkore's ESG Goals

Our Commitment to Customers

At Atkore, our focus is on customer relationships. We strive for excellence in getting you the products you need, when you need them. Our team is always ready to support critical projects across the U.S. with high-quality pipe that's built to last.



How to Order



Placing an Order

Step 1: Complete a credit application and submit a W9 through your agent or customer service representative to get set up in our system.

Step 2: Work with your agent or CSR to obtain a quote and then submit a PO for the order.

Contact Customer Service: [**WaterProductCustomerService@atkore.com**](mailto:WaterProductCustomerService@atkore.com)

Note that special orders are non-cancelable, non-returnable, and non-refundable.



Warranty Information

- Goods will materially conform to published specifications and be free from defects in materials and workmanship 12 months from date of manufacture.
- Repair or replacement of defective product.



See full
warranty details

PVC



PVC Pressure Rated Pipe

AWWA C900 Pressure Pipe

- Conforms to AWWA C900 and UL1285 as listed by NSF in accordance with Standard NSF 14
- Listed to FM 1612 for DR 14 and DR 18 products
- Each spigot end is beveled to facilitate assembly and double reference marked to indicate proper insertion depth
- Product manufactured with one integral gasketed bell per length
- Standard laying length of pipe is 20 feet
- Standard color is blue
- Green and purple are available upon request



Trade Size (in)	Part Number	Average OD (in)	Weight per Foot (WPF)	Crate Quantity (ft)
DR 25 - Pressure Rating 165 psi				
4	3640020G	4.800	1.898	960
6	3660020G	6.900	3.931	280
8	3680020G	9.050	6.800	200
10	36100020G	11.100	10.291	160
12	36120020G	13.200	14.583	60
DR 18 - Pressure Rating 235 psi*				
4	3740020G	4.800	2.594	960
6	3760020G	6.900	5.376	280
8	3780020G	9.050	9.309	200
10	37100020G	11.100	14.095	160
12	37120020G	13.200	19.988	60
DR 14 - Pressure Rating 305 psi*				
4	3840020G	4.800	3.282	960
6	3860020G	6.900	6.809	280
8	3880020G	9.050	11.798	200
10	38100020G	11.100	17.876	160
12	38120020G	13.200	25.357	60

*FM pressure rating is 250 psi for DR 14 and 185 psi for DR 18.

PVC Pressure Rated Pipe

Schedule 40 Pressure Pipe

- Conforms to ASTM D1785
- Conforms to ASTM D2665 for DWV applications in 1 ½", 2", 3", 4", and 6"-12" trade sizes
- Conforms to ASTM F480 for well casing applications in 2"-12" trade sizes
- Certified to the requirements of NSF 14 or NSF 61
- Product manufactured with one integral solvent-weld bell per length
- Standard overall pipe length is 10 feet or 20 feet
- Standard color is white



Trade Size (in)	Part Number		Pressure Rating (psi)	Average OD (in)	Weight per Foot (WPF)	Crate Quantity (ft)	
	10-foot	20-foot				10-foot	20-foot
½	5405010	5405020	600	0.840	0.166	3,600	7,200
¾	5407510	5407520	480	1.050	0.221	4,000	8,000
1	5410010	5410020	450	1.315	0.328	2,800	5,600
1¼	5412510	5412520	370	1.660	0.444	2,200	4,400
1½	5415010	5415020	330	1.900	0.531	1,800	3,600
2	5420010	5420020	280	2.375	0.714	1,050	2,100
2½	5425010	5425020	300	2.875	1.132	730	1,460
3	5430010	5430020	260	3.500	1.481	750	1,500
4	5440010	5440020	220	4.500	2.111	570	1,140
5	5450010	5450020	190	5.563	2.860	380	760
6	5460010	5460020	180	6.625	3.714	260	520
8	5480010	5480020	160	8.625	5.591	150	300
10	—	54100020	140	10.750	7.928	—	80
12	—	54120020	130	12.750	10.483	—	60

PVC Pressure Rated Pipe

Schedule 40 Pressure/DWV Pipe

- Conforms to ASTM D1785
- Conforms to ASTM D2665 for DWV applications in 1 ½", 2", 3", 4", and 6"-12" trade sizes
- Certified to the requirements of NSF 14 or NSF 61
- Product manufactured in plain end
- Standard overall pipe length is 10 feet or 20 feet
- Standard color is white



Trade Size (in)	Part Number		Pressure Rating (psi)	Average OD (in)	Weight per Foot (WPF)	Crate Quantity (ft)	
	10-foot	20-foot				10-foot	20-foot
½	5405010P	5405020P	600	0.840	0.166	3,600	7,200
¾	5407510P	5407520P	480	1.050	0.221	4,000	8,000
1	5410010P	5410020P	450	1.315	0.328	2,800	5,600
1¼	5412510P	5412520P	370	1.660	0.444	2,200	4,400
1½	5415010P	5415020P	330	1.900	0.531	1,800	3,600
2	5420010P	5420020P	280	2.375	0.714	1,050	2,100
2½	5425010P	5425020P	300	2.875	1.132	730	1,460
3	5430010P	5430020P	260	3.500	1.481	750	1,500
4	5440010P	5440020P	220	4.500	2.111	570	1,140
5	5450010P	5450020P	190	5.563	2.860	380	760
6	5460010P	5460020P	180	6.625	3.714	260	520
8	5480010P	5480020P	160	8.625	5.591	150	300
10	—	54100020P	140	10.750	7.928	—	80
12	—	54120020P	130	12.750	10.483	—	60

PVC Pressure Rated Pipe

Schedule 80 Pressure Pipe

- Conforms to ASTM D1785
- Certified to the requirements of NSF 14 or NSF 61
- Standard overall pipe length is 20 feet
- Product manufactured in plain end or with one integral solvent-weld bell per length
- Standard color is gray




Trade Size (in)	Part Number	Pressure Rating (psi)	Average OD (in)	Weight per Foot (WPF)	Crate Quantity (ft)
Plain End					
½	5805020P	850	0.840	0.211	7,200
¾	5807520P	690	1.050	0.287	8,000
1	5810020P	630	1.315	0.423	5,600
1¼	5812520P	520	1.660	0.584	4,400
1½	5815020P	470	1.900	0.708	3,600
2	5820020P	400	2.375	0.980	2,100
2½	5825020P	420	2.875	1.495	1,460
3	5830020P	370	3.500	2.002	1,500
4	5840020P	320	4.500	2.928	1,140
5	5850020P	290	5.563	4.061	760
6	5860020P	280	6.625	5.586	520
8	5880020P	250	8.625	8.486	300
Belled End					
½	5805020	850	0.840	0.211	7200
¾	5807520	690	1.050	0.287	8000
1	5810020	630	1.315	0.423	5600
1¼	5812520	520	1.660	0.584	4400
1½	5815020	470	1.900	0.708	3600
2	5820020	400	2.375	0.980	2100
2½	5825020	420	2.875	1.495	1460
3	5830020	370	3.500	2.002	1500
4	5840020	320	4.500	2.928	1140
5	5850020	290	5.563	4.061	760
6	5860020	280	6.625	5.586	520
8	5880020	250	8.625	8.486	300

PVC Pressure Rated Pipe

IPS SDR Solvent-Weld Pressure Pipe

- Conforms to ASTM D2241
- Certified to the requirements of NSF 61 or NSF 14
- Product manufactured with one integral solvent-weld bell per length
- Standard overall pipe length is 20 feet
- Standard color is white

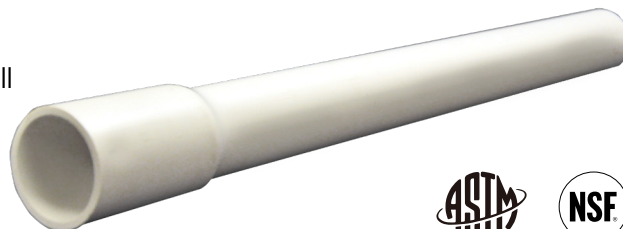

Trade Size (in)	Part Number	Average OD (in)	Weight per Foot (WPF)	Crate Quantity (ft)
SDR 64 - Pressure Rating 63 psi				
8	5980020	8.625	2.396	300
SDR 41 - Pressure Rating 100 psi				
3	5030020	3.500	0.610	1,500
4	5040020	4.500	1.008	1,140
5	5050020	5.563	1.541	760
6	5060020	6.625	2.185	520
8	5080020	8.625	3.704	300
SDR 32.5 - Pressure Rating 125 psi				
1¼	5512520	1.660	0.201	4,400
1½	5515020	1.900	0.231	3,600
2	5520020	2.375	0.352	2,100
2½	5525020	2.875	0.516	1,460
3	5530020	3.500	0.764	1,500
4	5540020	4.500	1.263	1,140
5	5550020	5.563	1.930	760
6	5560020	6.625	2.738	520
8	5580020	8.625	4.641	300
SDR 26 - Pressure Rating 160 psi				
1¼	5112520	1.660	0.213	4,400
1½	5115020	1.900	0.279	3,600
2	5120020	2.375	0.436	2,100
2½	5125020	2.875	0.636	1,460
3	5130020	3.500	0.947	1,500
4	5140020	4.500	1.566	1,140
5	5150020	5.563	2.393	760
6	5160020	6.625	3.394	520
8	5480020	8.625	5.591	300

PVC Pressure Rated Pipe

IPS SDR Solvent-Weld Pressure Pipe (cont'd)

Trade Size (in)	Part Number	Average OD (in)	Weight per Foot (WPF)	Crate Quantity (ft)
SDR 21 - Pressure Rating 200 psi				
¾	5207520	1.050	0.124	8,000
1	5210020	1.315	0.164	5,600
1¼	5212520	1.660	0.261	4,400
1½	5215020	1.900	0.342	3,600
2	5220020	2.375	0.535	2,100
3	5230020	3.500	1.161	1,500
4	5240020	4.500	1.919	1,140
5	5250020	5.563	2.933	760
6	5260020	6.625	4.167	520
8	5280020	8.625	7.039	300
SDR 13.5 - Pressure Rating 315 psi				
½	5305020	0.840	0.101	7,200

PVC Pressure Rated Pipe

IPS SDR Gasketed Pressure Pipe

- Conforms to ASTM D2241
- Certified to requirements of NSF 14 or NSF 61
- Each spigot end is beveled to facilitate assembly and reference marked to indicate proper insertion depth
- Product manufactured with one integral gasketed bell per length
- Standard laying length of pipe is 20 feet
- For SDR 21/Pressure Rating 200, blue, green, or purple are available upon request.
- Standard color is white



Trade Size (in)	Part Number	Average OD (in)	Weight per Foot (WPF)	Crate Quantity (ft)
SDR 64 - Pressure Rating 63 psi				
8	5980020G	8.625	2.462	300
SDR 41 - Pressure Rating 100 psi				
4	5040020G	4.500	1.034	1,140
5	5050020G	5.563	1.580	760
6	1560020G	6.625	2.242	520
8	1580020G	8.625	3.806	300
10	15100020G	10.750	5.934	240
12	15120020G	12.750	8.373	160
SDR 32.5 - Pressure Rating 125 psi				
4	5540020G	4.500	1.295	1,140
5	5550020G	5.563	1.980	760
6	5560020G	6.625	2.809	520
8	5580020G	8.625	4.769	300
10	55100020G	10.750	7.435	240
12	55120020G	12.750	10.490	160

PVC Pressure Rated Pipe

IPS SDR Gasketed Pressure Pipe (cont'd)

Trade Size (in)	Part Number	Average OD (in)	Approximate Weight per Foot (WPF)	Crate Quantity (ft)
SDR 26 - Pressure Rating 160 psi				
3	5130020G		0.964	1500
4	5140020G	4.500	1.605	1140
5	5150020G	5.563	2.454	760
6	5160020G	6.625	3.482	520
8	5180020G	8.625	5.911	300
10	51100020G	10.750	9.216	20
12	51120020G	12.750	13.003	160
SDR 21 - Pressure Rating 200 psi				
1½	5215020G	1.900	0.347	3,600
2	5220020G	2.375	0.542	2,100
2½	5225020G	2.875	0.796	1,460
3	5230020G	3.500	1.182	1,500
4	5240020G	4.500	1.967	1,140
6	5260020G	6.625	4.275	520
8	5280020G	8.625	7.234	300
10	52100020G	10.750	11.277	240
12	52120020G	12.750	15.909	160
SDR 13.5 - Pressure Rating 315 psi				
2	5320020G	2.375	0.819	2,100

PVC Pressure Rated Pipe

PIP Gasketed Pressure Pipe

- Conforms to ASTM D2241
- Certified to requirements of NSF 14 or NSF 61
- Each spigot end is beveled to facilitate assembly and reference marked to indicate proper insertion depth
- Product manufactured with one integral gasketed bell per length
- Standard laying length of pipe is 20 feet
- Standard color is white



Trade Size (in)	Part Number	Average OD (in)	Weight per Foot (WPF)	Crate Quantity (ft)
SDR 51 - Pressure Rating 80 psi				
6	1460020G	6.140	1.549	640
8	1480020G	8.160	2.749	360
10	14100020G	10.200	4.304	240
12	14120020G	12.240	6.213	160
15	14150020G	15.300	9.699	120
18	30180014G	18.701	12.979	40 / 60
SDR 41 - Pressure Rating 100 psi				
6	1560020G	6.140	1.917	640
8	1580020G	8.160	3.402	360
10	15100020G	10.200	5.326	240
12	15120020G	12.240	7.689	160
15	15150020G	15.300	12.002	120
18	15180020G	18.701	16.091	40 / 60
SDR 32.5 - Pressure Rating 125 psi				
6	1660020G	6.140	2.402	640
8	1680020G	8.160	4.262	360
10	16100020G	10.200	6.673	240
12	16120020G	12.240	9.633	160
15	16150020G	15.300	15.037	120
18	16180020G	18.701	20.158	40 / 60

PVC Pressure Rated Pipe

Well Casing Pipe

- Conforms to ASTM F480 with IC-0 impact class
- Conforms to ASTM D1785
- Conforms to ASTM D2665 for DWV applications in 2", 3", 6" trade sizes
- Certified to requirements of NSF 14 for ASTM F480
- Each spigot end is beveled to facilitate assembly and reference marked to indicate proper insertion depth
- Product manufactured with one integral solvent-weld bell per length
- Standard laying length of pipe is 20 feet
- Standard color is white



Trade Size (in)	Part Number	Average OD (in)	Weight per Foot (WPF)	Crate Quantity (ft)
2	5420020WC	2.375	0.714	2,100
3	5430020WC	3.500	1.481	1,500
4	5440020WC	4.500	2.111	1,140
5	5450020WC	5.563	2.860	760
6	5460020WC	6.625	3.714	520

PVC Sewer Pipe

Gasketed Gravity Sewer Pipe

- Trade sizes 4" - 15" conform to ASTM D3034
- Trade size 18" conforms to ASTM F679
- Each spigot end is beveled to facilitate assembly and reference marked to indicate proper insertion depth
- Products manufactured with one integral gasketed bell per length
- Standard laying length of pipe is 14 or 20 feet
- Standard color is green



Trade Size (in)	Part Number		Average OD (in)	Weight per Foot (WPF)	Crate Quantity (ft)	
	14-foot	20-foot			14-foot	20-foot
SDR 35						
4	3040014G	3040020G	4.215	1.111	1,176	1,680
6	3060014G	3060020G	6.275	2.473	490	700
8	3080014G	3080020G	8.400	4.428	280	400
10	30100014G	-	10.500	6.948	168	-
12	30120014G	-	12.500	9.952	112	-
15	30150014G	-	15.300	14.826	84	-
SDR 26						
4	3140014G	-	4.215	1.479	1,176	-
6	3160014G	-	6.275	3.281	490	-
8	3180014G	-	8.400	5.896	280	-
10	31100014G	-	10.500	9.253	168	-
12	31120014G	-	12.500	13.151	112	-
15	31150014G	-	15.300	19.745	84	-

PVC Sanitary Pipe

Gasketed Gravity Sewer Pipe (cont'd)

Trade Size (in)	Part Number	Average OD (in)	Weight per Foot (WPF)	Crate Quantity (ft)
PS 46				
18	30180014G	18.701	20.862	28
PS 115				
18	31180014G	18.701	27.774	28

PVC Sewer Pipe

Solvent-Weld Sewer Pipe

- Conforms to ASTM D3034 DR 35
- Product manufactured with one integral solvent-weld bell per length
- Standard overall pipe length is 10 feet or 20 feet
- Standard colors are white and green



Trade Size (in)	Part Number	Length (ft)	Average OD (in)	Weight per Foot (WPF)	Crate Quantity (ft)
Solid-wall - White					
4	3040010	10	4.215	1.079	630
	3040020	20			1,260
6	3060010	10	6.275	2.402	260
	3060020	20			520
8	3080010	10	8.400	4.287	140
Solid-wall - Green					
4	3040010GRN	10	4.215	1.079	630
	3040020GRN	20			1,260
6	3060010GRN	10	6.275	2.402	260
	3060020GRN	20			520

PVC Drainage Pipe

Drainage Pipe ASTM D2729

- Conforms to ASTM D2729
- Product manufactured with one integral solvent-weld bell per length
- Standard overall pipe length is 10 feet
- Perforated pipe is manufactured with 1/2-inch or 5/8-inch holes and is available in 2-hole or 3-hole configurations
- Standard color is white



Trade Size (in)	Part Number	Length (ft)	Perf. Hole Diameter (in)	Solid or Perf Pattern	Average OD (in)	Weight per Foot (WPF)	CrateQuantity (ft)
Solid-wall							
3	2730010	10	—	Solid	3.250	0.487	500
4	2740010	10	—	Solid	4.215	0.680	570
6	2760010	10	—	Solid	6.275	1.353	260
Perforated							
3	2730010FH	10	5/8	4-8	3.250	0.487	500
4	2740010F	10	1/2	4-8	4.215	0.680	570
	2740020F	20	1/2	4-8			1,260
	2740010FH	10	5/8	4-8			570
	2740010FH468	10	5/8	4-6-8			570
	2740010FH4812	10	5/8	4-8-12			570
6	2760010F	10	1/2	4-8	6.275	1.353	260
	2760020F	20	1/2	4-8			520
	2760010FH	10	5/8	4-8			260
	2760010FH468	10	5/8	4-6-8			260

Perforated pipe, with 5/8-inch or 1/2-inch holes, 5 inches on center, are available in 2-hole or 3-hole configurations:

2-hole: 4-8 o'clock position - 120° apart

3-hole: 4-6-8 o'clock position - 60° apart

3-hole: 4-8-12 o'clock position - 120° apart

PVC Drainage Pipe

Drainage Pipe ASTM D3034

- Perforated sewer pipe meets the requirements of ASTM D 3034 prior to perforation
- Perforated pipe is manufactured with ½-inch or ⅝-inch holes and is available in 2-hole or 3-hole configurations
- Product manufactured with one integral solvent-weld bell per length
- Standard overall pipe length is 20-feet or 10-feet
- Color of pipe is white or green



Trade Size (in)	Part Number	Length (ft)	Perf. Hole Diameter (in)	Solid or Perf Pattern	Average OD (in)	Weight per Foot (WPF)	Crate Quantity (ft)
Perforated - White							
4	3040010F	10	½	4-8	4.215	1.079	630
	3040020F	20	½	4-8			1,260
	3040010FH	10	⅝	4-8			630
	3040010FH468	10	⅝	4-6-8			630
6	3060010F	10	½	4-8	6.275	2.402	260
	3060020F	20	½	4-8			520
	3060010FH	10	⅝	4-8			260
	3060010FH468	10	⅝	4-6-8			260
Perforated - Green							
4	3040010FGRN	10	½	4-8	4.215	1.079	630
	3040020FGRN	20	½	4-8			1,260
	3040010FHGRN	10	⅝	4-8			630
	3040010FH468GRN	10	⅝	4-6-8			630
6	3060010FGRN	10	½	4-8	6.275	2.402	260
	3060020FGRN	20	½	4-8			520
	3060010FHGRN	10	⅝	4-8			260
	3060010FH468GRN	10	⅝	4-6-8			260

Perforated pipe, with ⅝-inch or ½-inch holes, 5 inches on center, are available in 2-hole or 3-hole configurations:

2-hole: 4-8 o'clock position - 120° apart

3-hole: 4-6-8 o'clock position - 60° apart

PVC Drainage Pipe

Schedule 40 IPS Perforated Pipe

- Conforms to ASTM D1785 prior to perforation
- Product manufactured with one integral solvent-weld bell per length
- Standard overall pipe length is 10 feet or 20 feet
- Perforated pipe is manufactured with 1/2-inch or 5/8-inch holes and is available in 2-hole or 3-hole configurations
- Standard color is white



Trade Size (in)	Part Number	Length (ft)	Perf Pattern	Perf. Hole Diameter (in)	Average OD (in)	Weight per Foot (WPF)	Crate Quantity (ft)
4	5440010FH	10	4-500	5/8	4.500	2.111	570
	5440010FH468	10	4-500	5/8	4.500	2.111	570
	5440020F	20	4-500	1/2	4.500	2.111	1,140
	5440020FH	20	4-500	5/8	4.500	2.111	1,140
	5440020FH468	20	4-500	5/8	4.500	2.111	1,140
6	5460010FH	10	4-8	5/8	6.625	3.714	260
	5460010FH468	10	4-6-8	5/8	6.625	3.714	260
	5460020F	20	4-8	1/2	6.625	3.714	520
	5460020FH	20	4-8	5/8	6.625	3.714	520
	5460020FH468	20	4-6-8	5/8	6.625	3.714	520

Perforated pipe, with 5/8-inch or 1/2-inch holes, 5 inches on center, are available in 2-hole or 3-hole configurations:


2-hole: 4-8 o'clock position - 120° apart

3-hole: 4-6-8 o'clock position - 60° apart

PVC Natural Gas Sleeving

Sleeve-It™ PVC

- Product manufactured with one integral solvent-weld bell per length
- Pipe is intended for sleeving applications and carries no pressure rating
- Standard overall pipe length is 20 feet
- Standard color is yellow

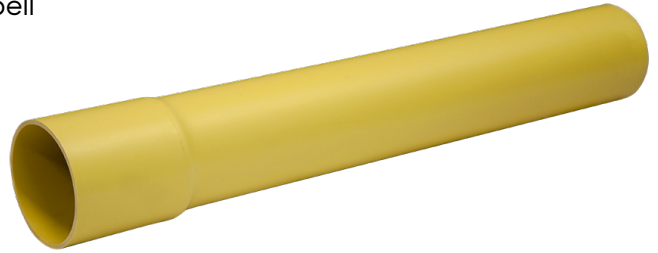

Trade Size (in)	Part Number	Average OD (in)	Weight per Foot (WPF)	Crate Quantity (ft)
Schedule 40				
1½	7415020	1.900	0.5556	4,500
2	7420020	2.375	0.7473	2,800
3	7430020	3.500	1.5500	1,760
4	7440020	4.500	2.2088	1,140
6	7460020	6.625	3.8863	520
8	7480020	8.625	5.8500	300
SDR 26				
1¼	7612520	1.660	0.2230	6,600
1½	7615020	1.900	0.2921	4,500
2	7620020	2.375	0.4564	2,800
3	7630020	3.500	0.9912	1,760
4	7640020	4.500	1.6386	1,140
6	7660020	6.625	3.5515	520

PVC Truck Loading Chart

Product Type	Trade Size	Pieces per Crate	Feet per Crate	Crates per Stack	Single Crate Percentage of Truckload
20-foot lengths Pressure Rated IPS Schedule 40 Schedule 80	½	360	7,200	9	2.8%
	¾	400	8,000	7	3.6%
	1	280	5,600	6	4.2%
	1¼	220	4,400	7	3.6%
	1½	180	3,600	7	3.6%
	2	105	2,100	7	3.6%
	2½	73	1,460	7	3.6%
	3	75	1,500	4	6.3%
	4	57	1,140	4	6.3%
	5	38	760	3	8.3%
	6	26	520	4	6.3%
	8	15	300	4	6.3%
	10	4	80	8	3.1%
	12	3	60	7	3.6%
20-foot lengths Pressure Rated PIP	6	32	640	4	6.3%
	8	18	360	4	6.3%
	10	12	240	3	8.3%
	12	8	160	4	6.3%
	15	6	120	3	8.3%
20-foot lengths Pressure Rated C900	4	48	960	4	6.3%
	6	14	280	7	3.6%
	8	10	200	5	5.0%
	10	8	160	4	6.3%
	12	3 & 4	60 & 80	7	3.1% & 4.1%

The above chart can be used for mixed truckload volume estimation.
Contact Customer Service for confirmation of full truckload quantities.

PVC Truck Loading Chart

Product Type	Trade Size	Pieces per Crate	Feet per Crate	Crates per Stack	Single Crate Percentage of Truckload
10-foot lengths Pressure Rated	½	360	3,600	9	1.4%
	¾	400	4,000	7	1.8%
	1	280	2,800	6	2.1%
	1¼	220	2,200	7	1.8%
	1½	180	1,800	7	1.8%
	2	105	1,050	7	1.8%
	2½	73	730	7	1.8%
	3	75	750	4	3.1%
	3¼	88	880	4	3.1%
	4	57	570	4	3.1%
	5	38	380	3	4.2%
	6	26	260	4	3.1%
	8	15	150	4	3.1%

The above chart can be used for mixed truckload volume estimation. Contact Customer Service for confirmation of full truckload quantities.

PVC Truck Loading Chart

Product Type	Trade Size	Pieces per Crate	Feet per Crate	Crates per Stack	Single Crate Percentage of Truckload	Full Truckload Totals	
						Crates	Feet
14-foot lengths Gasketed Sewer	4	84	1,176	3	5.6%	18	21,168
	6	35	490	3	5.6%	18	8,820
	8	20	280	3	5.6%	18	5,040
	10	12	168	3	5.6%	18	3,024
	12	8	112	3	5.6%	18	2,016
	15	6	84	3	5.6%	18	1,512
	18	2 & 3	28 & 42	5	2.7 & 4.1%	28	1,050
20-foot lengths Gasketed Sewer	4	84	1,680	3	8.3%	12	20,160
	6	35	700	3	8.3%	12	8,400
	8	20	400	3	8.3%	12	4,800
10-foot lengths Solvent-Weld Sewer	4	63	630	4	3.1%	32	20,160
	6	26	260	4	3.1%	32	8,320
	8	14	140	4	3.1%	32	4,480
20-foot lengths Solvent-Weld Sewer	4	63	1,260	4	6.3%	16	20,160
	6	26	520	4	6.3%	16	8,320
10-foot lengths Drain Line ASTM D2729	3	50	500	8	1.6%	64	32,000
	4	57	570	4	3.1%	32	18,240
	6	26	260	4	3.1%	32	8,320

Atkore™
United Poly
Systems

Atkore™
Heritage
Plastics

HDPE



HDPE Part Number Generator

We reference our individual HDPE products in literature, labeling and price sheets using the part number builder and a 4-6 digit system SKU number, which are used for RFQ's, order entry and invoicing.


Atkore part numbers are created using ten different values describing the attributes that make up each product and are used to easily identify each product's characteristics.

P 125 I D 11 BK NN N N S A COL

Part No. Sections	Product	Size	Dimension	Wall Type	Thickness	Color	Stripe	Pull Tape	Lube	Ribbing	Market	Package
Sample Section Value	Conduit/Duct	1.25"	IPS	DR	13.5	Orange	None	None	None	Smooth	AWWA Water-Line	Coil
Sample Value Code	P	125	I	D	11	OR	NN	N	N	S	A	COL
Code Finder	Pressure PE4710 = P	½" = 050	I = IPS	D = DR	7 = 07	None = NN	None = NN	None = N	None = N	Smooth = S	Non-Potable Water = A	Coil = COL
		¾" = 075	D = DIPS	S = SCH	9 = 09	Black = BK	Black = BK				NSF Potable Water = N	Sticks = STK
		1" = 100	C = CTS	I = SIDR	11 = 11	Gray = GY	Gray = GY				F2619 Oil & Gas = O	48" Reel = 048
		1.25" = 125			11.5 = 12	Blue = BL	Blue = BL				D2513 (Gas Distribution) = D	66" Reel = 066
		1.5" = 150			13.5 = 13	Green = GN	Green = GN				FM Approved = F	72" Reel = 072
		2" = 200			15.5 = 15	Purple = VT	Purple = VT					83" Reel = 083
		2.5" = 250			17 = 17	Red = RD	Red = RD					96" Reel = 096
		3" = 300			19 = 19	Yellow = YL	Yellow = YL					102" Reel = 102
		4" = 400			21 = 21	Orange = OR	Orange = OR					114" Reel = 114
		5" = 500			32.5 = 32	Pink = PK	Pink = PK					120" Reel = 120
		6" = 600			40 = 40							
		7" = 700			80 = 80							
		10" = K10			5 = 05							
		12" = K12			6 = 06							
		14" = K14			7.3 = 8							
		16" = K16			26 = 26							
		18" = K18			10 = 10							
		20" = K20										
		22" = K22										
		24" = K24										
		26" = K26										

Crystal-Line™ Water Pipe

- Applications include potable water, reclaimed water, and sewer
- Conforms to ASTM D2737, ASTM D3035, ASTM F714, AWWA C901, AWWA C906
- Certified to FM for SDR 7, 9, and 11 in trade sizes 4" and up
- Certified to NSF for potable water applications
- Diameter range of ¾" - 26"
- IPS, CTS, and DIPS pipe sizes
- Available in sticks, coils, and reels
- Standard colors are black; black with blue, lavender, or green striping; and solid blue, lavender, or green for tubing

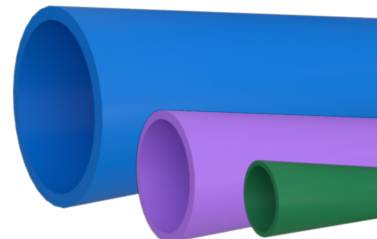

PE4710 Typical Physical Properties

Property	Typical value	Units	Test method
Density with minimum 2% carbon black	0.960	g / cc	ASTM D 792 or 1505
High Load Melt Index	8.5	g / 10 minutes	ASTM D 1238
Melt Index	0.08	g / 10 minutes	ASTM D 1238
Flexural Modulus	110,000 < 160,000	psi	ASTM D 790
Tensile Strength @ yield (2 in / min)	3600	psi	ASTM D 638
Tensile Elongation @ break	740%	%	ASTM D 638
Thermal expansion	1.0 x 10 ⁻⁴	in / in / °F	ASTM D 696
HDB 73.4° F (23°C)	1600	psi	ASTM D 2837
HDB 140° F (60°C)	1000	psi	ASTM D 2837
PENT	> 500	hrs	ASTM F1473
Brittleness Temperature	< -103°F (-75°C)	° F	ASTM D 746
Cell Classification	445574C (black only)		ASTM D 3350

*Nominal values

*Nominal values are to be used as guidelines only; this is not a product specification and does not indicate minimum or maximum values.

See pages 34-43 for size availability.

HDPE Water-Line™

Base-Line™ Mining Operations Pipe

- Conforms to ASTM D3035, ASTM F714
- Diameter range of ¾" - 26"
- IPS and DIPS pipe sizes
- Available in sticks, coils, and reels
- Standard color is black with color striping available



HDPE Pipe material definition according to ASTM D3350

Property	Typical Value	Units	Test Method
Density with min. 2% carbon black	0.960	g/cc	ASTM D792 or 1505
High Load Melt Index	8.5	g/10 minutes	ASTM D1238
Melt Index	0.08	g/10 minutes	ASTM D1238
Flexural Modulus	110,000 < 160,000	psi	ASTM D79F
Tensile Strength at Yield (2 in./min)	3,600	psi	ASTM D638
Tensile Elongation at Break	740%	%	ASTM D638
Thermal Expansion	1.0 x 10 ⁻⁴	in / in / °F	ASTM D696
HOB 73.4°F (23°C)	1600	psi	ASTM D2837
HOB 140°F (60°C)	1000	psi	ASTM D2837
PENT	> 500	hr	ASTM F1473
Brittleness Temperature	< -103°F (-75°C)	°F	ASTM D746
Cell Classification	445574C (black only)	—	* ASTM D3350

These are nominal values and used as guidelines only.
This is not a product specification and does not indicate minimum or maximum operating values.

Stripe Color to Identify SDR

	White	Red	Gold	Grey	Orange	Blue	Purple	Green
SDR	7	9	11	13.5	15.5	17	21	26

See pages 34-43 for size availability.

Fire Protection Pipe

- For industrial applications
- Certified to FM 1613 for underground fire protection
- Conforms to AWWA C906, ASTM F714
- Diameter range of 4" - 24"
- IPS pipe size
- Available in sticks, coils, and reels
- Standard color is black with optional striping



HDPE Pipe material definition according to ASTM D3350

Property	Typical Value	Units	Test Method
Density with min. 2% carbon black	0.960	g/cc	ASTM D792 or 1505
High Load Melt Index	8.5	g/10 minutes	ASTM D1238
Melt Index	0.08	g/10 minutes	ASTM D1238
Flexural Modulus	110,000 < 160,000	psi	ASTM D79F
Tensile Strength at Yield (2 in./min)	3,600	psi	ASTM D638
Tensile Elongation at Break	740%	%	ASTM D638
Thermal Expansion	1.0 x 10 ⁻⁴	in / in / °F	ASTM D696
HOB 73.4°F (23°C)	1600	psi	ASTM D2837
HOB 140°F (60°C)	1000	psi	ASTM D2837
PENT	> 500	hr	ASTM F1473
Brittleness Temperature	< -103°F (-75°C)	°F	ASTM D746
Cell Classification	445574C (black only)	—	ASTM D3350

These are nominal values and used as guidelines only.
This is not a product specification and does not indicate minimum or maximum operating values.

See pages 34–43 for size availability.

F2619 for Oil Gathering

- Conforms to ASTM D2619
- Diameter range of ¾" - 26"
- IPS pipe sizes
- Available in sticks, coils, and reels
- Standard color is black with color striping available



HDPE Pipe material definition according to ASTM D3350

Property	Typical Value	Units	Test Method
Density with min. 2% carbon black	0.960	g/cc	ASTM D792 or 1505
High Load Melt Index	8.5	g/10 minutes	ASTM D1238
Melt Index	0.08	g/10 minutes	ASTM D1238
Flexural Modulus	110,000 < 160,000	psi	ASTM D79F
Tensile Strength at Yield (2 in./min)	3,600	psi	ASTM D638
Tensile Elongation at Break	740%	%	ASTM D638
Thermal Expansion	1.0 x 10 ⁻⁴	in / in / °F	ASTM D696
HOB 73.4°F (23°C)	1600	psi	ASTM D2837
HOB 140°F (60°C)	1000	psi	ASTM D2837
PENT	> 500	hr	ASTM F1473
Brittleness Temperature	< -103°F (-75°C)	°F	ASTM D746
Cell Classification	445574C (black only)	—	ASTM D3350

These are nominal values and used as guidelines only.
This is not a product specification and does not indicate minimum or maximum operating values.

See pages 34–43 for size availability.

HDPE Size Availability Chart

Nominal Pipe Size	Avg. OD	SDR (PSI)	Min Wall / Weight	Product Availability				
				Crystal-Line	Base-Line	Fire Protection	Stream-Line Oil & Gas	
CTS (ASTM D737 / AWWA C901)								
¾"	0.875	9 (250psi)	Min Wall Weight lb/ft	0.097 0.104	X	—	—	—
1"	1.125	9 (250psi)	Min Wall Weight lb/ft	0.125 0.172	X	—	—	—
1¼"	1.375	9 (250psi)	Min Wall Weight lb/ft	0.153 0.257	X	X	X	X
1½"	1.625	9 (250psi)	Min Wall Weight lb/ft	0.181 0.36	X	—	—	—
2"	2.125	9 (250psi)	Min Wall Weight lb/ft	0.236 0.613	—	—	—	—
IPS (ASTM D3035 / AWWA C901**)								
¾"	1.05	7 (335psi)	Min Wall Weight lb/ft	0.15 0.185	X	X	—	X
		9 (250psi)**	Min Wall Weight lb/ft	0.117 0.15	X	X	—	X
		11 (200psi)	Min Wall Weight lb/ft	0.095 1.26	X	X	—	X
		13.5 (160psi)	Min Wall Weight lb/ft	0.078 0.104	X	X	—	X
1"	1.315	7 (335psi)	Min Wall Weight lb/ft	0.188 0.291	X	X	—	X
		9 (250psi)**	Min Wall Weight lb/ft	0.146 0.235	X	X	—	X
		11 (200psi)	Min Wall Weight lb/ft	0.12 0.198	X	X	—	X
		13.5 (160psi)	Min Wall Weight lb/ft	0.097 0.164	X	X	—	X
1¼"	1.66	7 (335psi)	Min Wall Weight lb/ft	0.237 0.463	X	X	—	X
		9 (250psi)**	Min Wall Weight lb/ft	0.184 0.374	X	X	—	X
		11 (200psi)	Min Wall Weight lb/ft	0.151 0.314	X	X	—	X
		13.5 (160psi)	Min Wall Weight lb/ft	0.123 0.261	X	X	—	X
		17 (130psi)	Min Wall Weight lb/ft	0.098 0.211	X	X	—	—

X = Available
— = Not Available

HDPE Size Availability Chart

Nominal Pipe Size	Avg. OD	SDR (PSI)	Min Wall / Weight		Product Availability			
					Crystal-Line	Base-Line	Fire Protection	Stream-Line Oil & Gas
IPS (ASTM D3035 / AWWA C901**) Continued								
1½"	1.9	7 (335psi)	Min Wall Weight lb/ft	0.271 0.607	X	X	—	X
		9 (250psi)**	Min Wall Weight lb/ft	0.211 0.49	X	X	—	X
		11 (200psi)	Min Wall Weight lb/ft	0.173 0.411	X	X	—	X
		13.5 (160psi)	Min Wall Weight lb/ft	0.141 0.342	X	X	—	X
		17 (130psi)	Min Wall Weight lb/ft	0.112 0.283	X	X	—	—
2"	2.375	7 (335psi)	Min Wall Weight lb/ft	0.339 0.948	X	X	—	X
		9 (250psi)**	Min Wall Weight lb/ft	0.264 0.766	X	X	—	X
		11 (200psi)	Min Wall Weight lb/ft	0.213 0.642	X	X	—	X
		13.5 (160psi)	Min Wall Weight lb/ft	0.176 0.534	X	X	—	X
		17 (130psi)	Min Wall Weight lb/ft	0.14 0.431	X	X	—	X
3"	3.5	7 (335psi)	Min Wall Weight lb/ft	0.5 2.058	X	X	—	X
		9 (250psi)**	Min Wall Weight lb/ft	0.389 1.664	X	X	—	X
		11 (200psi)	Min Wall Weight lb/ft	0.318 1.395	X	X	—	X
		13.5 (160psi)	Min Wall Weight lb/ft	0.259 1.159	X	X	—	X
		17 (130psi)	Min Wall Weight lb/ft	0.206 0.936	X	X	—	X

X = Available
— = Not Available

HDPE Size Availability Chart

Nominal Pipe Size	Avg. OD	SDR (PSI)	Min Wall / Weight		Product Availability			
					Crystal-Line	Base-Line	Fire Protection	Stream-Line Oil & Gas
IPS (ASTM F714 / AWWA C906 / FM 1613**)								
4"	4.5	7 (335psi)**	Min Wall Weight lb/ft	0.643 3.402	X	X	X	X
		9 (250psi)**	Min Wall Weight lb/ft	0.5 2.751	X	X	X	X
		11 (200psi)**	Min Wall Weight lb/ft	0.409 2.306	X	X	X	X
		13.5 (160psi)	Min Wall Weight lb/ft	0.333 1.916	X	X	—	X
		17 (130psi)	Min Wall Weight lb/ft	0.265 1.548	X	X	—	X
		21 (160psi)	Min Wall Weight lb/ft	0.214 1.269	X	X	—	X
6"	6.625	7 (335psi)	Min Wall Weight lb/ft	0.946 7.374	X	X	X	X
		9 (250psi)	Min Wall Weight lb/ft	0.736 5.963	X	X	X	X
		11 (200psi)	Min Wall Weight lb/ft	0.602 4.997	X	X	X	X
		13.5 (160psi)	Min Wall Weight lb/ft	0.491 4.152	X	X	—	X
		17 (130psi)	Min Wall Weight lb/ft	0.39 3.355	X	X	—	X
		21 (160psi)	Min Wall Weight lb/ft	0.315 2.75	X	X	—	X
8"	8.625	7 (335psi)**	Min Wall Weight lb/ft		X	X	X	X
		9 (250psi)**	Min Wall Weight lb/ft		X	X	X	X
		11 (200psi)**	Min Wall Weight lb/ft		X	X	X	X
		13.5 (160psi)	Min Wall Weight lb/ft		X	X	—	X
		17 (130psi)	Min Wall Weight lb/ft		X	X	—	X
		21 (160psi)	Min Wall Weight lb/ft		X	X	—	X

X = Available
— = Not Available

HDPE Size Availability Chart

Nominal Pipe Size	Avg. OD	SDR (PSI)	Min Wall / Weight		Product Availability			
					Crystal-Line	Base-Line	Fire Protection	Stream-Line Oil & Gas
IPS (ASTM F714 / AWWA C906 / FM 1613**) Continued								
10"	10.750	7 (335psi)	Min Wall Weight lb/ft	1.536 19.416	X	X	X	X
		9 (250psi)	Min Wall Weight lb/ft	1.194 15.7	X	X	X	X
		11 (200psi)	Min Wall Weight lb/ft	0.977 13.157	X	X	X	X
		13.5 (160psi)	Min Wall Weight lb/ft	0.796 10.932	X	X	—	X
		17 (130psi)	Min Wall Weight lb/ft	0.632 8.834	X	X	—	X
		21 (160psi)	Min Wall Weight lb/ft	0.512 7.242	X	X	—	X
12"	12.750	7 (335psi)**	Min Wall Weight lb/ft	1.821 27.312	X	X	X	X
		9 (250psi)**	Min Wall Weight lb/ft	1.417 22.085	X	X	X	X
		11 (200psi)**	Min Wall Weight lb/ft	1.159 18.508	X	X	X	X
		13.5 (160psi)	Min Wall Weight lb/ft	1.159 15.379	X	X	—	X
		17 (130psi)	Min Wall Weight lb/ft	0.75 12.427	X	X	—	X
		21 (160psi)	Min Wall Weight lb/ft	0.607 10.187	X	X	—	X
14"	14	7 (335psi)	Min Wall Weight lb/ft	2 32.93	X	X	X	X
		9 (250psi)	Min Wall Weight lb/ft	1.556 26.628	X	X	X	X
		11 (200psi)	Min Wall Weight lb/ft	1.273 22.315	X	X	X	X
		13.5 (160psi)	Min Wall Weight lb/ft	1.037 18.542	X	X	—	X
		17 (130psi)	Min Wall Weight lb/ft	0.824 14.983	X	X	—	X
		21 (160psi)	Min Wall Weight lb/ft	0.667 12.282	X	X	—	X

X = Available
— = Not Available

HDPE Size Availability Chart

Nominal Pipe Size	Avg. OD	SDR (PSI)	Min Wall / Weight		Product Availability			
					Crystal-Line	Base-Line	Fire Protection	Stream-Line Oil & Gas
IPS (ASTM F714 / AWWA C906 / FM 1613**) Continued								
16"	16	7 (335psi)**	Min Wall Weight lb/ft	2.286 43.01	X	X	X	X
		9 (250psi)**	Min Wall Weight lb/ft	1.778 34.779	X	X	X	X
		11 (200psi)**	Min Wall Weight lb/ft	1.455 29.146	X	X	X	X
		13.5 (160psi)	Min Wall Weight lb/ft	1.185 24.218	X	X	—	X
		17 (130psi)	Min Wall Weight lb/ft	0.941 19.569	X	X	—	X
		21 (160psi)	Min Wall Weight lb/ft	0.762 16.042	X	X	—	X
18"	18	7 (335psi)	Min Wall Weight lb/ft	2.571 54.435	X	X	X	X
		9 (250psi)	Min Wall Weight lb/ft	2 44.017	X	X	X	X
		11 (200psi)	Min Wall Weight lb/ft	1.636 36.888	X	X	X	X
		13.5 (160psi)	Min Wall Weight lb/ft	1.333 30.651	X	X	—	X
		17 (130psi)	Min Wall Weight lb/ft	1.059 24.767	X	X	—	X
		21 (160psi)	Min Wall Weight lb/ft	0.857 20.304	X	X	—	X
20"	20	7 (335psi)**	Min Wall Weight lb/ft	2.857 67.203	X	X	X	X
		9 (250psi)**	Min Wall Weight lb/ft	2.222 54.342	X	X	X	X
		11 (200psi)**	Min Wall Weight lb/ft	1.818 45.541	X	X	X	X
		13.5 (160psi)	Min Wall Weight lb/ft	1.481 37.84	X	X	—	X
		17 (130psi)	Min Wall Weight lb/ft	1.176 30.577	X	X	—	X
		21 (160psi)	Min Wall Weight lb/ft	0.952 25.066	X	X	—	X

X = Available
— = Not Available

HDPE Size Availability Chart

Nominal Pipe Size	Avg. OD	SDR (PSI)	Min Wall / Weight		Product Availability			
					Crystal-Line	Base-Line	Fire Protection	Stream-Line Oil & Gas
IPS (ASTM F714 / AWWA C906 / FM 1613**) Continued								
22"	22	7 (335psi)	Min Wall Weight lb/ft	3.143 81.316	X	X	X	X
		9 (250psi)	Min Wall Weight lb/ft	2.444 65.754	X	X	X	X
		11 (200psi)	Min Wall Weight lb/ft	2 55.105	X	X	—	X
		13.5 (160psi)	Min Wall Weight lb/ft	1.63 45.787	X	—	—	X
		17 (130psi)	Min Wall Weight lb/ft	1.294 36.998	X	X	—	X
		21 (160psi)	Min Wall Weight lb/ft	1.048 30.33	X	X	—	X
24"	24	7 (335psi)**	Min Wall Weight lb/ft	3.429 96.773	X	X	X	X
		9 (250psi)**	Min Wall Weight lb/ft	2.667 78.253	X	X	X	X
		11 (200psi)**	Min Wall Weight lb/ft	2.182 65.579	X	X	X	X
		13.5(160psi)	Min Wall Weight lb/ft	1.778 54.59	X	X	—	X
		17 (130psi)	Min Wall Weight lb/ft	1.412 44.031	X	X	—	X
		21 (160psi)	Min Wall Weight lb/ft	1.143 36.095	X	X	—	X
26"	26	7 (335psi)	Min Wall Weight lb/ft	3.714 113.574	X	X	—	X
		9 (250psi)	Min Wall Weight lb/ft	2.889 91.838	X	X	—	X
		11 (200psi)	Min Wall Weight lb/ft	2.364 76.964	X	X	—	X
		13.5 (160psi)	Min Wall Weight lb/ft	1.926 63.95	X	X	—	X
		17 (130psi)	Min Wall Weight lb/ft	1.529 51.675	X	X	—	X
		21 (160psi)	Min Wall Weight lb/ft	1.238 42.362	X	X	—	X

X = Available
— = Not Available

HDPE Size Availability Chart

Nominal Pipe Size	Avg. OD	SDR (PSI)	Min Wall / Weight		Product Availability			
					Crystal-Line	Base-Line	Fire Protection	Stream-Line Oil & Gas
DIPS (ASTM F714 / AWWA C906)								
4"	4.8	7 (335psi)	Min Wall Weight lb/ft	0.686 3.871	X	—	—	—
		9 (250psi)	Min Wall Weight lb/ft	0.533 3.128	X	—	—	—
		11 (200psi)	Min Wall Weight lb/ft	0.436 2.621	X	—	—	—
		13.5 (160psi)	Min Wall Weight lb/ft	0.356 2.182	X	—	—	—
		17 (130psi)	Min Wall Weight lb/ft	0.282 1.759	X	—	—	—
		21 (160psi)	Min Wall Weight lb/ft	0.229 1.446	X	—	—	—
6"	6.9	7 (335psi)	Min Wall Weight lb/ft	0.986 7.999	X	—	—	—
		9 (250psi)	Min Wall Weight lb/ft	0.767 6.471	X	—	—	—
		11 (200psi)	Min Wall Weight lb/ft	0.627 5.418	X	—	—	—
		13.5 (160psi)	Min Wall Weight lb/ft	0.511 4.503	X	—	—	—
		17 (130psi)	Min Wall Weight lb/ft	0.406 3.64	X	—	—	—
		21 (160psi)	Min Wall Weight lb/ft	0.329 2.987	X	—	—	—
8"	9.050	7 (335psi)	Min Wall Weight lb/ft	1.293 13.76	X	—	—	—
		9 (250psi)	Min Wall Weight lb/ft	1.006 11.131	X	—	—	—
		11 (200psi)	Min Wall Weight lb/ft	0.823 9.328	X	—	—	—
		13.5 (160psi)	Min Wall Weight lb/ft	0.67 7.744	X	—	—	—
		17 (130psi)	Min Wall Weight lb/ft	0.532 6.257	X	—	—	—
		21 (160psi)	Min Wall Weight lb/ft	0.431 5.133	X	—	—	—

X = Available
— = Not Available

HDPE Size Availability Chart

Nominal Pipe Size	Avg. OD	SDR (PSI)	Min Wall / Weight		Product Availability			
					Crystal-Line	Base-Line	Fire Protection	Stream-Line Oil & Gas
DIPS (ASTM F714 / AWWA C906) Continued								
10"	11.1	7 (335psi)	Min Wall Weight lb/ft	1.586 20.7	X	—	—	—
		9 (250psi)	Min Wall Weight lb/ft	1.233 16.735	X	—	—	—
		11 (200psi)	Min Wall Weight lb/ft	1.009 14.027	X	—	—	—
		13.5 (160psi)	Min Wall Weight lb/ft	0.822 11.653	X	—	—	—
		17 (130psi)	Min Wall Weight lb/ft	0.653 9.419	X	—	—	—
		21 (160psi)	Min Wall Weight lb/ft	0.529 7.727	X	—	—	—
12"	13.2	7 (335psi)	Min Wall Weight lb/ft	1.886 29.274	X	—	—	—
		9 (250psi)	Min Wall Weight lb/ft	1.467 23.676	X	—	—	—
		11 (200psi)	Min Wall Weight lb/ft	1.2 19.838	X	—	—	—
		13.5 (160psi)	Min Wall Weight lb/ft	0.978 16.487	X	—	—	—
		17 (130psi)	Min Wall Weight lb/ft	0.776 13.312	X	—	—	—
		21 (160psi)	Min Wall Weight lb/ft	0.629 10.926	X	—	—	—
14"	15.3	7 (335psi)	Min Wall Weight lb/ft	2.186 39.329	X	—	—	—
		9 (250psi)	Min Wall Weight lb/ft	1.7 31.802	X	—	—	—
		11 (200psi)	Min Wall Weight lb/ft	1.391 26.653	X	—	—	—
		13.5 (160psi)	Min Wall Weight lb/ft	1.131 22.139	X	—	—	—
		17 (130psi)	Min Wall Weight lb/ft	0.9 17.894	X	—	—	—
		21 (160psi)	Min Wall Weight lb/ft	0.729 14.678	X	—	—	—

X = Available
— = Not Available

HDPE Size Availability Chart

Nominal Pipe Size	Avg. OD	SDR (PSI)	Min Wall / Weight		Product Availability			
					Crystal-Line	Base-Line	Fire Protection	Stream-Line Oil & Gas
DIPS (ASTM F714 / AWWA C906)								
16"	17.4	7 (335psi)	Min Wall Weight lb/ft	2.486 50.866	X	—	—	—
		9 (250psi)	Min Wall Weight lb/ft	1.933 41.125	X	—	—	—
		11 (200psi)	Min Wall Weight lb/ft	1.582 34.474	X	—	—	—
		13.5 (160psi)	Min Wall Weight lb/ft	1.289 28.644	X	—	—	—
		17 (130psi)	Min Wall Weight lb/ft	1.024 23.154	X	—	—	—
		21 (160psi)	Min Wall Weight lb/ft	0.829 18.982	X	—	—	—
18"	19.5	7 (335psi)	Min Wall Weight lb/ft	2.786 63.885	X	—	—	—
		9 (250psi)	Min Wall Weight lb/ft	2.167 51.666	X	—	—	—
		11 (200psi)	Min Wall Weight lb/ft	1.773 43.298	X	—	—	—
		13.5 (160psi)	Min Wall Weight lb/ft	1.44 35.962	X	—	—	—
		17 (130psi)	Min Wall Weight lb/ft	1.147 29.066	X	—	—	—
		21 (160psi)	Min Wall Weight lb/ft	0.929 23.839	X	—	—	—
20"	21.60	7 (335psi)	Min Wall Weight lb/ft	3.086 78.386	X	—	—	—
		9 (250psi)	Min Wall Weight lb/ft	2.4 63.385	X	—	—	—
		11 (200psi)	Min Wall Weight lb/ft	1.964 53.128	X	—	—	—
		13.5 (160psi)	Min Wall Weight lb/ft	1.6 44.137	X	—	—	—
		17 (130psi)	Min Wall Weight lb/ft	1.271 35.676	X	—	—	—
		21 (160psi)	Min Wall Weight lb/ft	1.029 29.249	X	—	—	—

X = Available
— = Not Available

HDPE Size Availability Chart

Nominal Pipe Size	Avg. OD	SDR (PSI)	Min Wall / Weight		Product Availability			
					Crystal-Line	Base-Line	Fire Protection	Stream-Line Oil & Gas
DIPS (ASTM F714 / AWWA C906)								
24"	25.8	7 (335psi)	Min Wall Weight lb/ft	3.686 111.833	X	—	—	—
		9 (250psi)	Min Wall Weight lb/ft	2.867 90.44	X	—	—	—
		11 (200psi)	Min Wall Weight lb/ft	2.345 75.772	X	—	—	—
		13.5 (160psi)	Min Wall Weight lb/ft	1.911 62.967	X	—	—	—
		17 (130psi)	Min Wall Weight lb/ft	1.518 50.894	X	—	—	—
		21 (160psi)	Min Wall Weight lb/ft	1.229 41.726	X	—	—	—

X = Available
— = Not Available

HDPE Truck Loading Chart

Reels

Reels Per Truck		24	18	16	14	12	12	8
Pipe Diameter	SDR	48" Reel	66" Reel	72" Reel	83" Reel	96" Reel	102" Reel	120" Reel
¾"	7	4,000'	8,000'	10,000'	—	—	—	—
¾"	9	4,000'	8,000'	10,000'	—	—	—	—
¾"	11	4,000'	8,000'	10,000'	—	—	—	—
¾"	13.5	4,000'	8,000'	10,000'	—	—	—	—
1"	7	2,500'	5,500'	6,500'	10,000'	—	—	—
1"	9	2,500'	5,500'	6,500'	10,000'	—	—	—
1"	11	2,500'	5,500'	6,500'	10,000'	—	—	—
1"	13.5	2,500'	5,500'	6,500'	10,000'	—	—	—
1¼"	7	1,000'	3,500'	4,250'	6,600'	8,750'	—	—
1¼"	9	1,000'	3,500'	4,250'	6,600'	8,750'	—	—
1¼"	11	1,000'	3,500'	4,250'	6,600'	8,750'	—	—
1¼"	13.5	1,000'	3,500'	4,250'	6,600'	8,750'	—	—
1¼"	15.5	1,000'	3,500'	4,250'	6,600'	8,750'	—	—
1¼"	17	1,000'	3,500'	4,250'	6,600'	8,750'	—	—
1½"	7	1,000'	2,500'	3,000'	4,500'	6,300'	7,250'	—
1½"	9	1,000'	2,500'	3,000'	4,500'	6,300'	7,250'	—
1½"	11	1,000'	2,500'	3,000'	4,500'	6,300'	7,250'	—
1½"	13.5	1,000'	2,500'	3,000'	4,500'	6,300'	7,250'	—
1½"	15.5	1,000'	2,500'	3,000'	4,500'	6,300'	7,250'	—
1½"	17	1,000'	2,500'	3,000'	4,500'	6,300'	7,250'	—
2"	7	500'	1,500'	2,000'	2,900'	4,150'	4,500'	—
2"	9	500'	1,500'	2,000'	2,900'	4,150'	5,000'	—
2"	11	500'	1,500'	2,000'	2,900'	4,150'	5,000'	—
2"	13.5	500'	1,500'	2,000'	2,900'	4,150'	5,000'	—
2"	15.5	500'	1,500'	2,000'	2,900'	4,150'	5,000'	—
2"	17	X	1,200'	2,000'	2,700'	4,000'	4,500'	—

— = Not Available

HDPE Truck Loading Chart

Reels

Reels Per Truck		24	18	16	14	12	12	8
Pipe Diameter	SDR	48" Reel	66" Reel	72" Reel	83" Reel	96" Reel	102" Reel	120" Reel
3"	7	—	—	—	—	1150'	1,400'	2,400'
3"	9	—	—	—	—	1150'	1,500'	2,400'
3"	11	—	—	—	—	1150'	1,500'	2,400'
3"	13.5	—	—	—	—	1150'	1,500'	2,400'
3"	15.5	—	—	—	—	1,000'	1,400'	2,400'
3"	17	—	—	—	—	1,000'	1,400'	2,400'
4"	7	—	—	—	—	550'	800'	1,500'
4"	9	—	—	—	—	550'	800'	1,500'
4"	11	—	—	—	—	550'	800'	1,500'
4"	13.5	—	—	—	—	550'	800'	1,500'
4"	15.5	—	—	—	—	—	—	—
4"	17	—	—	—	—	—	—	—
6"	7	—	—	—	—	—	—	450'
6"	9	—	—	—	—	—	—	450'
6"	11	—	—	—	—	—	—	450'
6"	13.5	—	—	—	—	—	—	450'
6"	15.5	—	—	—	—	—	—	—
6"	17	—	—	—	—	—	—	—

— = Not Available

HDPE Truck Loading Chart

Sticks

Size	Pressure Class	Bundle qty	Bundles/ TL	Stick Length	TL QTY
IPS					
1"	335-65	163	60	20	195600
1"	335-65	163	30	40	195600
2"	335-65	98	36	20	70560
2"	335-65	98	18	40	70560
2"	335-65	98	18	50	88200
3"	335-65	50	28	20	28000
3"	335-65	50	14	40	28000
3"	335-65	50	14	50	35000
4"	335-65	29	28	20	16240
4"	335-65	29	14	40	16240
4"	335-65	29	14	50	20300
6"	335-65	26	16	20	8320
6"	335-65	26	8	40	8320
6"	335-65	26	8	50	10400
7"	335-65	17	20	20	6800
7"	335-65	17	10	40	6800
7"	335-65	17	10	50	8500
8"	335-65	14	16	20	4480
8"	335-65	14	8	40	4480
8"	335-65	14	8	50	5600
10"	335-65	9	16	20	2880
10"	335-65	9	8	40	2880
10"	335-65	9	8	50	3600
12"	335-65	4	24	20	1920
12"	335-65	4	12	40	1920
12"	335-65	4	12	50	2400
14"	335-65	7	24	20	3360
14"	335-65	7	12	40	3360
14"	335-65	7	6	50	2100

HDPE Truck Loading Chart

Sticks

Size	Pressure Class	Bundle qty	Bundles/ TL	Stick Length	TL QTY
IPS					
16"	335-250	6	6	20	720
16"	335-250	6	6	40	1440
16"	335-250	6	4	50	1200
16"	200-65	6	12	20	1440
16"	200-65	6	6	40	1440
16"	200-65	6	5	50	1500
18"	335-250	5	6	20	600
18"	335-250	5	4	40	800
18"	335-250	5	4	50	1000
18"	200-65	5	6	20	600
18"	200-65	5	5	40	1000
18"	200-65	5	5	50	1250
20"	335-65	5	8	20	800
20"	335-65	5	4	40	800
20"	335-65	5	4	50	1000
22"	335-65	4	8	20	640
22"	335-65	4	4	40	640
22"	335-65	4	4	50	800
24"	335-65	4	6	20	480
24"	335-65	4	3	40	480
24"	335-65	4	4	50	800
26"	335-65	3	6	20	360
26"	335-65	3	3	40	360
26"	335-65	3	3	50	450

HDPE Truck Loading Chart

Sticks

Size	Pressure Class	Bundle qty	Bundles/ TL	Stick Length	TL QTY
DIPS					
4"	335-65	29	28	20	16240
4"	335-65	29	14	40	16240
4"	335-65	29	14	50	20300
6"	335-65	26	16	20	8320
6"	335-65	26	8	40	8320
6"	335-65	26	8	50	10400
8"	335-65	14	16	20	4480
8"	335-65	14	8	40	4480
8"	335-65	14	8	50	5600
10"	335-65	9	16	20	2880
10"	335-65	9	8	40	2880
10"	335-65	9	8	50	3600
12"	335-65	7	20	20	2800
12"	335-65	7	10	40	2800
12"	335-65	7	10	50	3500
14"	335-65	3	16	20	960
14"	335-65	3	8	40	960
14"	335-65	3	8	50	1200
16"	335-65	5	12	20	1200
16"	335-65	5	6	40	1200
16"	335-65	5	6	50	1500
18"	335-65	5	8	20	800
18"	335-65	5	4	40	800
18"	335-65	5	4	50	1000
20"	335-65	2	12	20	480
20"	335-65	2	6	40	480
20"	335-65	2	6	50	600
24"	335-65	3	8	20	480
24"	335-65	3	4	40	480
24"	335-65	3	4	50	600


HDPE Truck Loading Chart

Coils

Size	Pressure Class	Coils per Pallet	Pallet Size	Coil Length
IPS				
¾"	335-130	8	48	500
¾"	335-130	3	48	2000
1"	335-130	7	48	500
1"	335-130	5	60	1000
1"	335-130	3	60	2000
1¼"	335-130	5	60	5000
1¼"	335-130	3	80	1000
1¼"	335-130	3	80	2000
1½"	335-130	7	80	500
1½"	335-130	7	80	1000
2"	335-130	7	80	500
2"	335-130	7	80	1000
2"	335-130	7	80	2000
3"	335-139	4	CRADLE OR STANDING	500
3"	335-139	2	CRADLE OR STANDING	1000
4"	335-200	3	CRADLE OR STANDING	500
4"	335-200	2	CRADLE OR STANDING	800
6"	200	2	CRADLE OR STANDING	500
DIPS				
4"	335-65	2	Cradle	500
6"	335-65	2	Cradle	500

[illegible]

Get in Touch



waterproductcustomerservice@atkore.com



**BUILDING BETTER
TOGETHER**