

BALDOR

HVAC/VARIABLE TORQUE MOTOR

CAT. NO.

HM9214T

SPEC.

35R148R389H1

FRAME

145T

VOLTS

230/460

AMPS

4.4/2.2

P.M.

1725

IZ

60

PH.

3

CLASS

B

L.F.

1.15

DES.

B

CODE

K

A NOM. EFF.

84

%

P.F.

79

%

NG

40C AMB-CONT

C

010A

USABLE AT 208V

4.6 A

RINGS

DE

6205

ODE

6203

RMAL

AUTO


N

NONE

Y


F0111131836

LOW
VOLTAGE

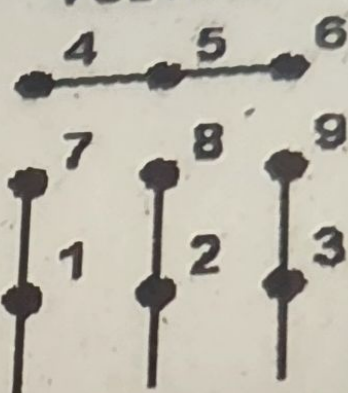

LINE

HIGH
VOLTAGE

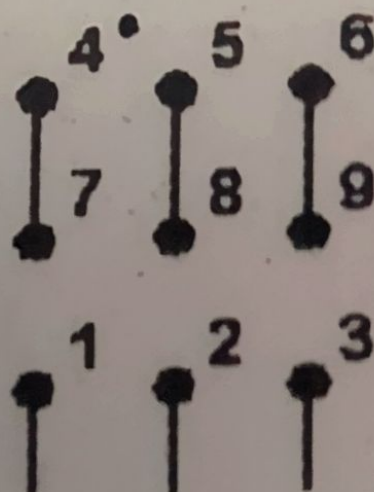

LINE

INTERCHANGE
ANY TWO LINE
LEADS TO REV.
ROTATION.

⚠ WARNING

MOTOR MUST BE GROUNDED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND LOCAL CODES, BY TRAINED PERSONNEL TO PREVENT SERIOUS ELECTRICAL SHOCK.

MOTOR IS EQUIPPED WITH THERMAL PROTECTOR AND OVER HEATS, MOTOR CIRCUIT WILL OPEN. AUTOMATIC THERMALS WILL RESET AFTER MOTOR COOLS SUFFICIENTLY.

TO SERVICE MOTOR, DISCONNECT POWER SOURCE FROM MOTOR AND ANY ACCESSORY DEVICES AND ALLOW MOTOR TO COME TO A COMPLETE STANDSTILL.

IF MOTOR IS EQUIPPED WITH LIFTING PROVISIONS, THESE PROVISIONS ARE FOR LIFTING THE MOTOR ONLY.