



GE Motors &
Industrial Systems

A-C MOTOR

HD56FL652

- WARNING -

MOD **5K49MN4250EZ**

HP - HZ 60

V 208-230/460

PH 3

RPM 1725

CODE J

A 5.20/2.60

SF 1.15

SFA 5.40/2.80

FR 56Y

AMB 40 C

INSUL
CLASS B

NEMA
DESIGN B


TIME RATING CONT AIR OVER

ALTERNATE RATING

230/400 V 50 HZ

1430 RPM 6.3/3.0A

TERMINAL COVER MUST BE IN PLACE FOR SAFE OPERATION.
GROUND IN ACCORDANCE WITH LOCAL & NATIONAL ELECTRICAL CODES
KEEP FINGERS & OBJECTS AWAY FROM OPENINGS & ROTATING PARTS
DISCONNECT POWER SOURCES BEFORE TOUCHING INTERNAL PARTS.

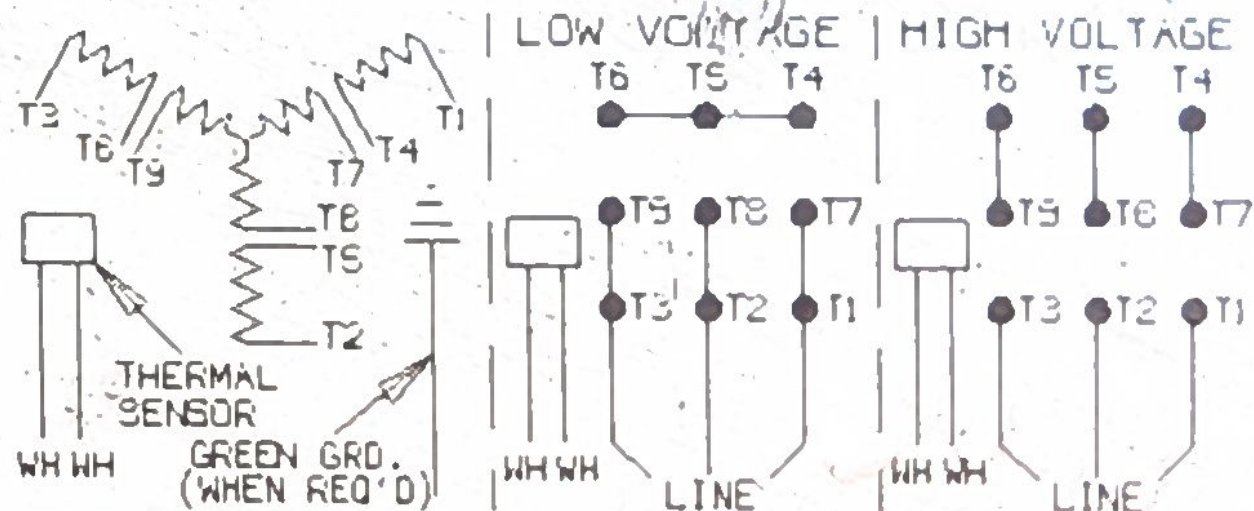

THERMAL SENSOR CIRCUIT VOLTAGE MUST NOT EXCEED 500 VOLTS.

TO REVERSE ROTATION, INTERCHANGE EXTERNAL CONNECTIONS
S2X333197AA TO ANY TWO LINE LEADS

HD56FL652

PACK

ACCESSORIES:

SER.
NO.

WSJ270996



PERMANENTLY LUBRICATED BALL BEARINGS.
RELUBRICATION NOT REQUIRED.



ASSEMBLED IN
MEXICO