

Carrier
Corporation
TYLER, TEXAS

MODEL 48TFF006-A-511--
SERIAL 0602G10144
FACTORY CHARGED



	QTY	VOLTS AC	PH	HZ	RLA	LRA	REF. SYSTEM R-22	TEST PRESSURE GAGE
COMPR	1	208/230	3	60	16.0	114	7.9 LBS	3.6 kg HI 401 PSI 2761 kPa
COMPR							LBS	kg LO 175 PSI 1207 kPa
FAN MTR	QTY	VOLTS AC	PH	HZ	FLA			
OUTDOOR	1	208/230	1	60	1.4			
OUTDOOR								
INDOOR	1	208/230		60	5.2			
OTHER								
COMBUST.	1	208/230	1	60	0.6			

CHARGE SYSTEM PER INSTALLATION INSTRUCTIONS FOR OUTDOOR INSTALLATION ONLY	POWER SUPPLY 208/230	3 PH	60 HZ
	PERMISSIBLE VOLTAGE AT UNIT	254	MAX 187 MIN

	TOP	BOTTOM *	SIDES	FLUE SIDE **
DOWN SUPPLY	0 IN 0MM	1.0 IN 25.4MM	0 IN 0MM	36 IN 914MM
SIDE SUPPLY				

* FOR INSTALLATION ON COMBUSTIBLE FLOORING OR CLASS A,B, OR C ROOFING MATERIAL	
** 18 INCHES (457mm) WITH ACCESSORY FLUE DISCHARGE DEFLECTOR	
MIN CKT 27 AMPS	MAX FUSE OR HACR BREAKER 35 MINIMUM UNIT DISCONNECT FLA MAX OVERCURRENT PROTECTIVE DEVICE 26 148
	COMBINATION COOLING AND HEATING UNIT

DEVICE CERTIFIED AS A FORCED AIR FURNACE WITH COOLING UNIT CSA APPROVED FOR NON-RESIDENTIAL USE TO -40 F AMBIENT.	
DESIGNED MAXIMUM OUTLET AIR TEMPERATURE	185F 85C

AIR TEMP RISE	MAX EXTERNAL STATIC PRESSURE
50-80F 27.8-44.4C	1.0WC 0.25KPA

INPUT MIN	INPUT MAX	OUTPUT CAP	THERMAL EFFICIENCY	EQUIPED FOR USE WITH
BTU/HR 120000	150000	96000/120000		
W 35.2	44.0	28.1-35.2	80	NATURAL GAS
GAS SUPPLY PRESSURE	13WC 3.23KPA MAX	5WC 1.24KPA MIN		
MANIFOLD PRESSURE	2.2-3.5WC 0.55-0.87KPA			

GAS HEATING PORTION CLASSIFIED BY UNDERWRITERS LABORATORIES IN ACCORDANCE WITH ANSI Z21.47 STANDARD-1993




48TFF006-A-511--



0602G10144



LISTED
COOLING PORTION OF
HEATING AND COOLING UNIT
36N2

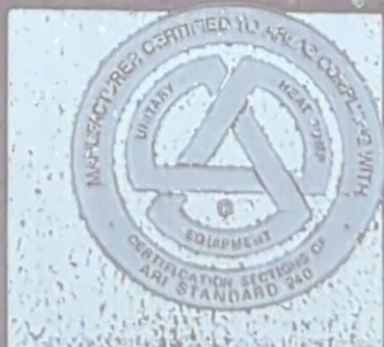

99NA504574-A