



A-C MOTOR

MOD 5K49WN4522Z

HP HZ 60

V 208-230/460 PH 3

RPM 1725 CODE M

A 5.6/2.8 SF 1.15

SFA 6.1/3.1 FR 56HZ

AMB 40 C INSUL CLASS B NEMA DESIGN

TIME RATING CONT AIR OVER

ALTERNATE RATING

230/400V 50HZ


1450 RPM 6.4/3.1 A

HD58FE653

SER. NO. HD58FE653*G12J24



WARNING
TERMINAL COVER MUST BE IN PLACE FOR SAFE OPERATION.
GROUND IN ACCORDANCE WITH LOCAL & NATIONAL ELECTRICAL CODES.
KEEP FINGERS & OBJECTS AWAY FROM OPENINGS & ROTATING PARTS.
DISCONNECT POWER SOURCES BEFORE TOUCHING INTERNAL PARTS.

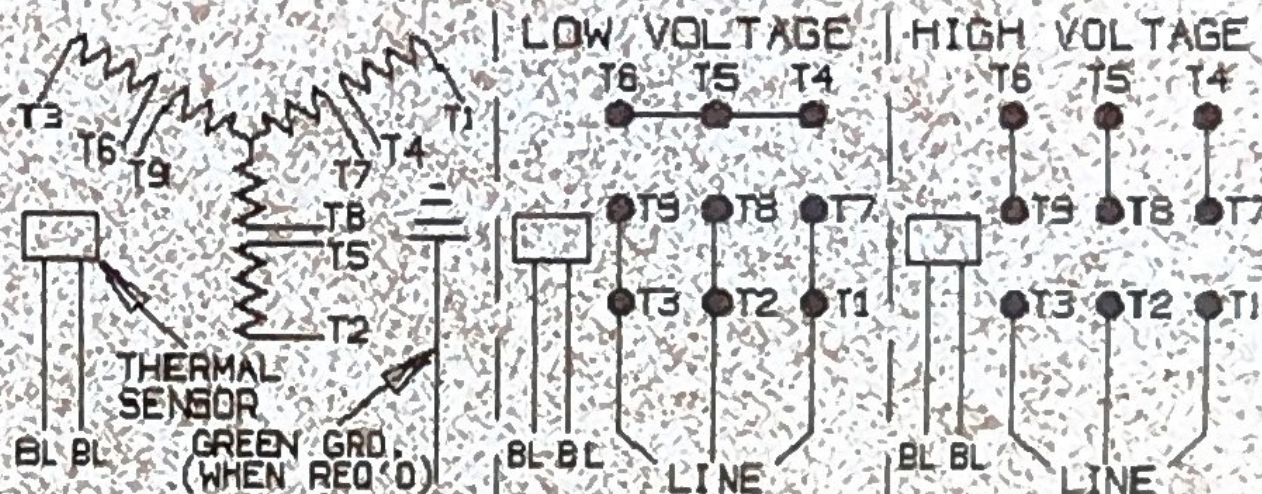

TERMINAL SENSOR CIRCUIT VOLTAGE MUST NOT EXCEED 550 VOLTS
TO REVERSE ROTATION, INTERCHANGE EXTERNAL CONNECTIONS
52X333197AA TO ANY TWO LINE LEADS

PERMANENTLY LUBRICATED BALL BEARINGS,
RELUBRICATION NOT REQUIRED.



236833



E46035

ASSEMBLED IN
MEXICO

