



ATR 42-300

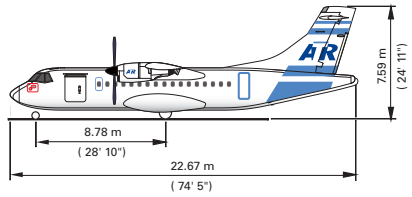


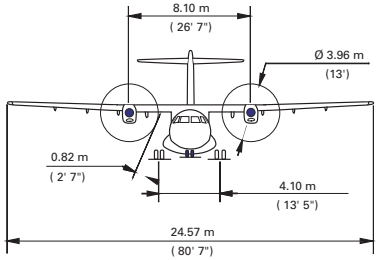



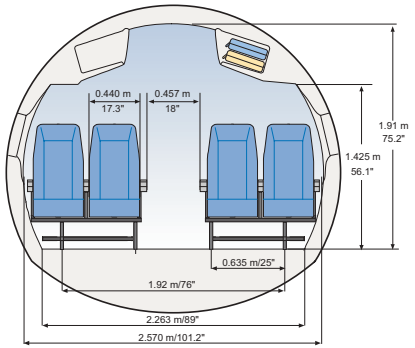


48 pax at 30" pitch

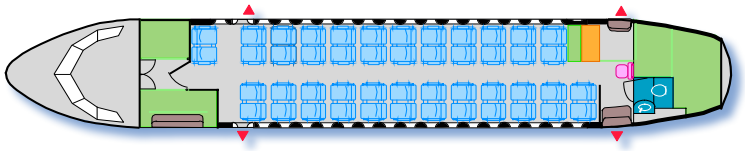



Attendant seat | Galley | Toilet | Baggage | Emergency exit


Standard configuration	48 seats
Engines Pratt & Whitney Canada	PW120
Take-off power	1,800 SHP
Take-off power - One engine	2,000 SHP
Max continuous	1,700 SHP
Max climb	1,700 SHP
Max cruise	1,619 SHP
Propellers Hamilton Standard	14 SF-5
Blades, diameter	4, 3.96 m - 13 ft
Weights	
Max take-off weight (basic)	16,700 kg - 36,817 lb
Max take-off weight (option)	16,900 kg - 37,257 lb
Max landing weight (basic)	16,400 kg - 36,155 lb
Max zero fuel weight (basic)	15,200 kg - 33,510 lb
Max zero fuel weight (option)	15,540 kg - 34,259 lb
Operational empty weight (Tech. Spec.)	10,285 kg - 22,674 lb
Operational empty weight (Typical in-service)	10,900 kg - 24,030 lb
Max payload (at typical in-service OEW)	4,640 kg - 10,229 lb
Max fuel load	4,500 kg - 9,921 lb
Airfield performance	
Take-off distance	
➨ Basic - MTOW - ISA - SL	1,090 m - 3,576 ft
➨ Option - MTOW - ISA - SL	1,123 m - 3,684 ft
➨ TOW for 300 Nm - Max pax - SL - ISA	1,073 m - 3,520 ft
➨ TOW for 300 Nm - Max pax - 3,000 ft - ISA +10	1,271 m - 4,170 ft
Take-off speed (V2 min @ MTOW)	108 KCAS
Landing field length (FAR25)	
➨ Basic MLW - SL	1,033 m - 3,389 ft
➨ LW (max pax + reserves) - SL	1,008 m - 3,307 ft
➨ Reference speed at landing	103 KIAS
En-route performance	
Optimum climb speed	160 KCAS
Rate of climb (ISA, SL, MTOW)	1,320 ft/min
Time to climb to FLI170	15.1 min
One engine net ceiling (95% MTOW, ISA +10)	9,580 ft
Max Cruise speed (95% MTOW - ISA - Optimum FL)	266 KTAS - 493 km/h
Fuel flow at cruise speed	568 kg/hr - 1,252 lb/h
Range with max pax	456 Nm
200 Nm Block Fuel	500 kg - 1,102 lb
200 Nm Block Time	55.9 min
300 Nm Block Fuel	685 kg - 1,510 lb
300 Nm Block Time	79.3 min

ATR 42-320

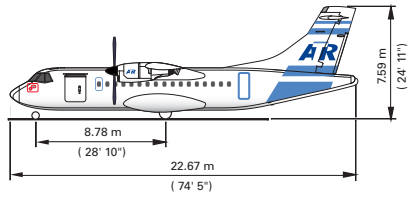


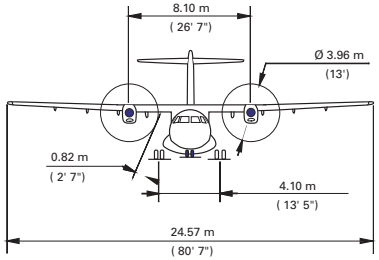



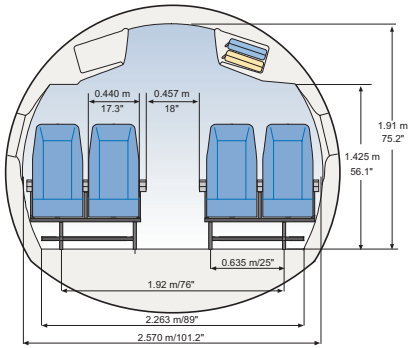



48 pax at 30" pitch

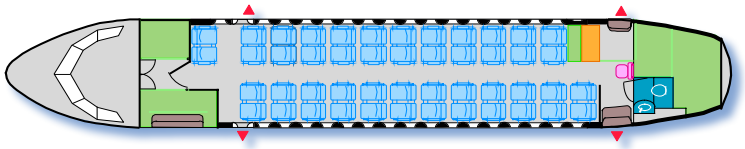



Standard configuration	48 seats
Engines Pratt & Whitney Canada	PW121
Take-off power	1,900 SHP
Take-off power - One engine	2,100 SHP
Max continuous	1,900 SHP
Max climb	1,700 SHP
Max cruise	1,700 SHP
Propellers Hamilton Standard	14 SF-5
Blades, diameter	4, 3.96 m - 13 ft
Weights	
Max take-off weight (basic)	16,700 kg - 36,817 lb
Max take-off weight (option1)	16,900 kg - 37,257 lb
Max landing weight (basic)	16,400 kg - 36,155 lb
Max zero fuel weight (basic)	15,200 kg - 33,510 lb
Max zero fuel weight (option)	15,540 kg - 34,259 lb
Operational empty weight (Tech. Spec.)	10,290 kg - 22,685 lb
Operational empty weight (Typical in-service)	10,900 kg - 24,030 lb
Max payload (at typical in-service OEW)	4,640 kg - 10,229 lb
Max fuel load	4,500 kg - 9,921 lb
Airfield performance	
Take-off distance	
➨ Basic - MTOW - ISA - SL	1,041 m - 3,415 ft
➨ Option - MTOW - ISA - SL	1,068 m - 3,504 ft
➨ TOW for 300 Nm - Max pax - SL - ISA	1,026 m - 3,366 ft
➨ TOW for 300 Nm - Max pax - 3,000 ft - ISA +10	1,222 m - 4,009 ft
Take-off speed (V2 min @ MTOW)	108 KCAS
Landing field length (FAR25)	
➨ Basic MLW - SL	1,030 m - 3,379 ft
➨ LW (max pax + reserves) - SL	1,008 m - 3,307 ft
➨ Reference speed at landing	103 KIAS
En-route performance	
Optimum climb speed	160 KCAS
Rate of climb (ISA, SL, MTOW)	1,320 ft/min
Time to climb to FLI170	14.8 min
One engine net ceiling (95% MTOW, ISA +10)	10,940 ft
Max Cruise speed (95% MTOW - ISA - Optimum FL)	270 KTAS - 500 km/h
Fuel flow at cruise speed	584 kg/hr - 1,287 lb/h
Range with max pax	459 Nm
200 Nm Block Fuel	495 kg - 1,091 lb
200 Nm Block Time	55.9 min
300 Nm Block Fuel	676 kg - 1,490 lb
300 Nm Block Time	79.3 min

ATR 42-400

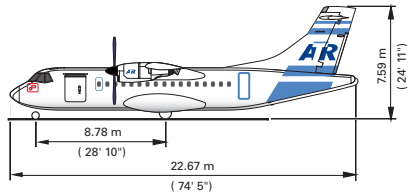


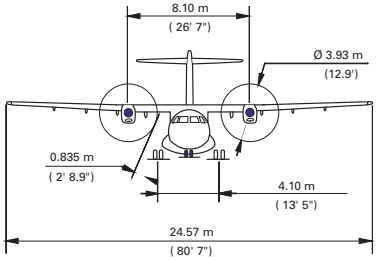



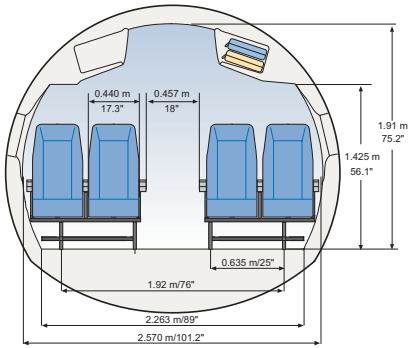


48 pax at 30" pitch

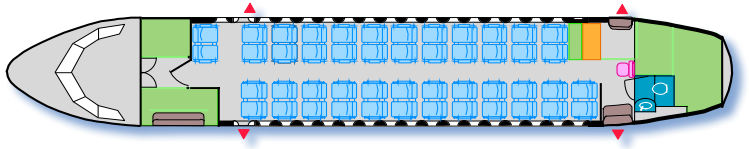



Attendant seat | Galley | Toilet | Baggage | Emergency exit


Standard configuration	48 seats
Engines Pratt & Whitney Canada	PW121A
Take-off power	1,980 SHP
Take-off power - One engine	2,200 SHP
Max continuous	1,900 SHP
Max climb	1,700 SHP
Max cruise	1,700 SHP
Propellers Hamilton Standard	568F
Blades, diameter	6, 3.93 m - 12.9 ft
Weights	
Max take-off weight (basic)	17,900 kg - 39,462 lb
Max take-off weight (option1)	18,200 kg - 40,123 lb
Max landing weight (basic)	17,600 kg - 38,801 lb
Max landing weight (option)	17,900 kg - 39,462 lb
Max zero fuel weight (basic)	16,300 kg - 35,935 lb
Max zero fuel weight (option)	16,600 kg - 36,596 lb
Operational empty weight (Tech. Spec.)	11,050 kg - 24,361 lb
Operational empty weight (Typical in-service)	11,400 kg - 25,132 lb
Max payload (at typical in-service OEW)	5,200 kg - 11,464 lb
Max fuel load	4,500 kg - 9,921 lb
Airfield performance	
Take-off distance	
➨ Basic - MTOW - ISA - SL	1,205 m - 3,953 ft
➨ Option - MTOW - ISA - SL	1,264 m - 4,147 ft
➨ TOW for 300 Nm - Max pax - SL - ISA	1,071 m - 3,514 ft
➨ TOW for 300 Nm - Max pax - 3,000 ft - ISA +10	1,310 m - 4,298 ft
Take-off speed (V2 min @ MTOW)	111 KCAS
Landing field length (FAR25)	
➨ Basic MLW - SL	1,120 m - 3,675 ft
➨ Option MLW - SL	1,135 m - 3,724 ft
➨ LW (max pax + reserves) - SL	1,063 m - 3,488 ft
➨ Reference speed at landing	105 KIAS
En-route performance	
Optimum climb speed	160 KCAS
Rate of climb (ISA, SL, MTOW)	1,135 ft/min
Time to climb to FLI170	17.9 min
One engine net ceiling (95% MTOW, ISA +10)	7,705 ft
Max Cruise speed (95% MTOW - ISA - Optimum FL)	261 KTAS - 484 km/h
Fuel flow at cruise speed	588 kg/hr - 1,296 lb/h
Range with max pax	794 Nm
200 Nm Block Fuel	511 kg - 1,127 lb
200 Nm Block Time	57.4 min
300 Nm Block Fuel	706 kg - 1,556 lb
300 Nm Block Time	81.5 min

ATR 42-500

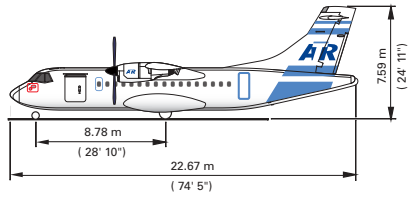


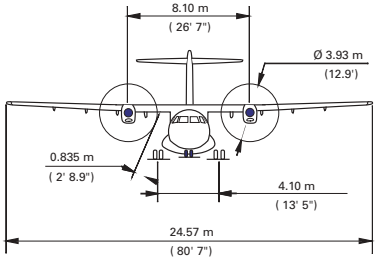



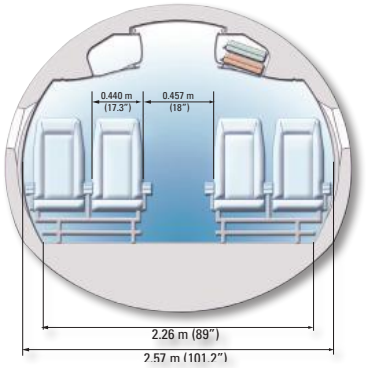


48 pax at 30" pitch

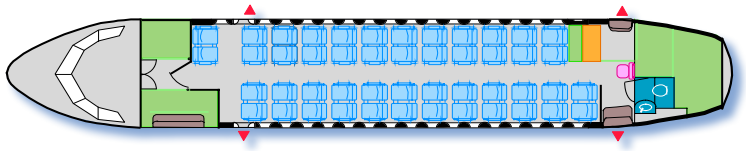



Attendant seat | Galley | Toilet | Baggage | Emergency exit


Standard configuration	48 seats
Engines Pratt & Whitney Canada	PW127E/M
Take-off power	2,160 SHP
Take-off power - One engine	2,400 SHP
Max continuous	2,400 SHP
Max climb	2,160 SHP
Max cruise	2,132 SHP
Propellers Hamilton Standard	568F
Blades, diameter	6, 3.93 m - 12.9 ft
Weights	
Max take-off weight (basic)	18,600 kg - 41,005 lb
Max landing weight (basic)	18,300 kg - 40,344 lb
Max zero fuel weight (basic)	16,700 kg - 36,817 lb
Max zero fuel weight (Option)	17,000 kg - 37,478 lb
Operational empty weight (Tech. Spec.)	11,250 kg - 24,802 lb
Operational empty weight (Typical in-service)	11,700 kg - 25,794 lb
Max payload (at typical in-service OEW)	5,300 kg - 11,684 lb
Max fuel load	4,500 kg - 9,921 lb
Airfield performance	
Take-off distance	
• Basic - MTOW - ISA - SL	1,165 m - 3,822 ft
➨ TOW for 300 Nm - Max pax - SL - ISA	1,025 m - 3,363 ft
➨ TOW for 300 Nm - Max pax - 3,000 ft - ISA +10	1,215 m - 3,986 ft
Take-off speed (V2 min @ MTOW)	112 KCAS
Landing field length (FAR25)	
➨ Basic MLW - SL	1,126 m - 3,694 ft
➨ LW (max pax + reserves) - SL	1,055 m - 3,461 ft
➨ Reference speed at landing	104 KIAS
En-route performance	
Optimum climb speed	160 KCAS
Rate of climb (ISA, SL, MTOW)	1,851 ft/min
Time to climb to FLI170	12.7 min
One engine net ceiling (95% MTOW, ISA +10)	13,010 ft
Max Cruise speed (95% MTOW - ISA - Optimum FL)	300 KTAS - 556 km/h
Fuel flow at cruise speed	811 kg/hr - 1,788 lb/h
Range with max pax	716 Nm
200 Nm Block Fuel	565 kg - 1,246 lb
200 Nm Block Time	54.0 min
300 Nm Block Fuel	783 kg - 1,726 lb
300 Nm Block Time	75.0 min

ATR 42-600

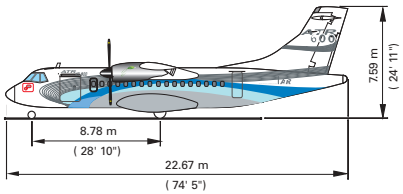


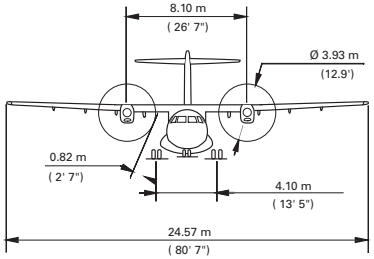



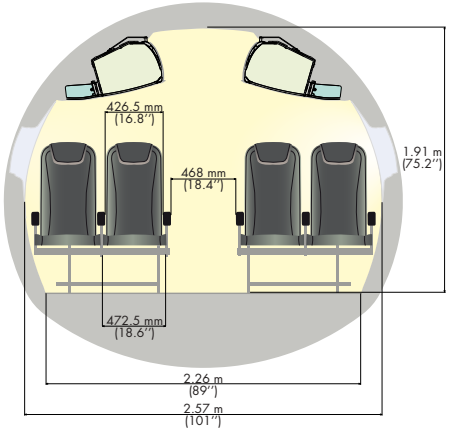

48 pax at 30" pitch

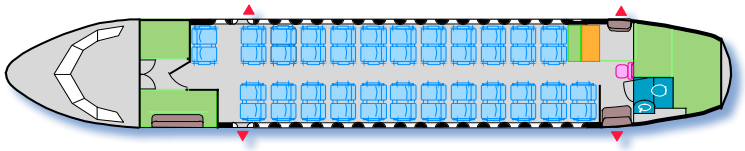

Attendant seat | Galley | Toilet | Baggage | Emergency exit

Standard configuration	48 seats
Engines Pratt & Whitney Canada	PW127M
Take-off power	2,160 SHP
Take-off power - One engine	2,400 SHP
Max continuous	2,400 SHP
Max climb	2,160 SHP
Max cruise	2,132 SHP
Propellers Hamilton Standard	568F
Blades, diameter	6, 3.93 m - 12.9 ft
Weights	
Max take-off weight (basic)	18,600 kg - 41,005 lb
Max landing weight (basic)	18,300 kg - 40,344 lb
Max zero fuel weight (basic)	16,700 kg - 36,817 lb
Max zero fuel weight (Option)	17,000 kg - 37,478 lb
Operational empty weight (Tech. Spec.)	11,550 kg - 25,463 lb
Operational empty weight (Typical in-service)	11,700 kg - 25,794 lb
Max payload (at typical in-service OEW)	5,300 kg - 11,684 lb
Max fuel load	4,500 kg - 9,921 lb
Airfield performance	
Take-off distance	
➨ Basic - MTOW - ISA - SL	1,165 m - 3,822 ft
➨ TOW for 300 Nm - Max pax - SL - ISA	1,025 m - 3,363 ft
➨ TOW for 300 Nm - Max pax - 3,000 ft - ISA +10	1,215 m - 3,986 ft
Take-off speed (V2 min @ MTOW)	112 KCAS
Landing field length (FAR25)	
➨ Basic MLW - SL	1,126 m - 3,694 ft
➨ LW (max pax + reserves) - SL	1,055 m - 3,461 ft
➨ Reference speed at landing	104 KIAS
En-route performance	
Optimum climb speed	160 KCAS
Rate of climb (ISA, SL, MTOW)	1,851 ft/min
Time to climb to FLI170	12.7 min
One engine net ceiling (95% MTOW, ISA +10)	13,010 ft
Max Cruise speed (95% MTOW - ISA - Optimum FL)	300 KTAS - 556 km/h
Fuel flow at cruise speed	811 kg/hr - 1,788 lb/h
Range with max pax	716 Nm
200 Nm Block Fuel	565 kg - 1,246 lb
200 Nm Blo ck Time	54.1 min
300 Nm Block Fuel	783 kg - 1,727 lb
300 Nm Block Time	75.0 min