

Alaska®

BATTERIES

LiFe

LITHIUM BATTERIES

Who We Are?

We may be a new name in Pakistan's energy sector, but the mind behind the machine is of veterans with over 30 years of experience. It was built from observation, from years inside an industry that had grown comfortable with repetition. The same claims. The same promises. The same expectations. We saw a category where inconsistency was normalized and innovation was abandoned. Where reliability was marketed more often than it was engineered. That complacency became our starting point.

Alaska was established with a clear conviction: Standards must rise, Reliability must be maintained and Performance must be proven.

We set out to deliver greater value without compromise. We test beyond the minimum standards, because that is how the real world is. We listen, we refine, and we improve. Alaska exists to solve everyday power problems, so you can drive, work, and live with confidence. Our story is not about entering the energy space, it is about redefining what it should expect.

Why Choose Lithium Batteries?

Lithium-Ion Phosphate batteries represent a major breakthrough in modern battery technology. As a standout member of the lithium battery family, $LiFePO_4$ batteries are globally recognized for their unmatched safety, extended lifespan, and superior performance. Their stable chemical structure reduces the risk of overheating and combustion, making them a safer alternative for both residential and industrial applications. With longer cycle life, higher thermal stability, and rapid charging capabilities, $LiFePO_4$ batteries are revolutionizing energy storage solutions powering the future of Solar, EV, and backup power systems around the world.

LiFe

Alaska® BATTERIES

ہر لمحہ اعتماد

A-LiFe51.2100W

51.2V 100AH Wall Mount

A smart wall mounted Household Energy Storage System with a sleek and space-saving solution for your energy storage needs. With its compact design and easy installation, it seamlessly blends into any environment. Whether at your Home, Office, Commercial & Industrial space, our wall-mounted unit provides reliable and efficient energy storage, empowering you to optimize energy usage and reduce waste. Its design enables parallel installation to meet extended power backups.

Product Features

- Built-in intelligent BMS with charge/discharge current limitations
- Automatic protection for overcharge/discharge and temperature conditions
- Compatible with standard rectifiers/inverters/UPS
- High reliability design
- Excellent battery life

Product Applications

UPS

Signals

EPS

Base Station

Electric Vehicle

Other Power Uses

Solar Power



LiFe

Model: A-LiFe 51.2V 100AH

Technical Specifications

Battery Type	Lithium Iron Phosphate Battery ($LiFePO_4$/LFP)
Nominal Capacity	5.12 kWh
Nominal Voltage	51.2 V
Installation Type	Wall Mounted
Max. Charge / Discharge Current	100A / 1C
Recommended Charge / Discharge Current	50A / 0.5C
Operating Voltage Range	43.2V～57.6V
Cycle Life	6000+ cycles @DOD80%
Communication Interface	RS485/CAN/RS232
No. of cells	16
IP Rating	IP54
Design Life	10+ years
Operating Temp. Range Charge	0～55°C
Operating Temp. Range Discharge	-20～60°C
Operating Humidity	≤ 75%RH
Max Parrallel Connection (Scalability)	15
Weight	～45kg
Dimensions (mm)	L620×W435.4×H197.3 ±2mm
Display	LED / LCD
Protection	Overcharge & Over-discharge Protection, Short-circuit Protection, Over-heat Protection
Wifi, Bluetooth	Optional
Certifications	IEC 62619, UN 38.3 ISO 9001:2015, ISO 14001:2015, ISO 45001:2018

LiFe

Alaska® BATTERIES

ہر لمحہ اعتماد

A-LiFe48100R

48V 100AH Rack Mount

A powerful smart rechargeable LiFePO4 intelligent energy storage unit, especially designed to provide Power Backup for Telecom Sites, IT/Data Centers and Solar Energy Storage Systems. Its design enables parallel installation to meet extended power backups.

Product Features

- Built-in intelligent BMS with charge/discharge current limitations
- Automatic protection for overcharge/discharge and temperature conditions
- Compatible with standard rectifiers/inverters/UPS
- High reliability design
- Excellent battery life

Product Applications

UPS | Signals | EPS

Base Station | Electric Vehicle | Other Power Uses | Solar Power



LiFe

Model: A-LiFe 48V 100AH R

Technical Specifications

Battery Type	Lithium Iron Phosphate Battery ($LiFePO_4$/LFP)
Battery Model	A-LFP 48V 10OAH R
Nominal Capacity	100Ah
Nominal Voltage	48V
Battery Energy	4800Wh
Charge Voltage	54V
Discharge Voltage	40.5V
Nominal Charge/Discharge Current	50A
Nominal Charge/Discharge Power	2400W
Max Charge /Discharge Current	100A
Max Charge /Discharge Power	4800W
Display	SOC Status Indicator, LED Indicator
Communication	RS485, CAN
Dimension(W×D×H mm)	440 × 440 × 133(mm)
Weight (Kg)	46kg Approx.
Installation	Rack Mounted
Charge Temperature	0°C~55°C
Discharge Temperature	-20°C~60°C
Storage Temperature	-20°C~60°C
Operating/Storage/humidity	5% - 95%RH
Max Operating Altitude	≤4000m
IP Rating	IP20
Cell Type	$LiFePO_4$, Lithium Iron Phosphate
Cycle life	6000+ Cycles @ 80% DOD/25°C/0.5C
Cell Configuration	1P15S
Scalability	Max 15 batteries in parallel

LiFe

Alaska® BATTERIES

ہر لمحہ اعتماد

A-LiFe24100W

25.6V 100AH Wall Mount

Smart wall mounted LiFePO4 Household Energy Storage System (HESS), low maintenance battery with stable chemistry, sleek and space-saving solution for your energy storage needs. With its compact design and easy installation, it seamlessly blends into any environment. It provides reliable and efficient energy storage for Solar Energy and other critical Power Backup Applications, empowering you to optimize energy usage and reduce waste. Its design enables parallel installation to meet extended power backups.

Product Features

- Built-in intelligent BMS with charge/discharge current limitations
- Automatic protection for overcharge/discharge and temperature conditions
- Compatible with standard rectifiers/inverters/UPS
- High reliability design
- Excellent battery life

Product Applications

UPS

Signals

EPS

Base Station

Electric Vehicle

Other Power Uses

Solar Power



LiFe

Model: A-LiFe 25.6V 100AH W

Technical Specifications

Battery Type	Lithium Iron Phosphate Battery ($LiFePO_4$/LFP)
Model	A-LFP 25.6V 10OAH W
Nominal Voltage	25.6V
Nominal Capacity	100Ah
Battery Energy	2560Wh
Charge Voltage	29.2V
Discharge Voltage	20.8V
Nominal Charge/Discharge Current	50A (0.5C)
Nominal Charge/Discharge Power	1280W
Max Charge/Discharge Current	100A (1C)
Max Charge/Discharge Power	2560W
Display	Touch Screen LCD display
Communication	RS485, CAN, Bluetooth
Dimension (WxDxH mm)	150 X 395 X 587 mm
Weight (Kg)	28kg Approx.
Installation	Wall Mounted
Charge Temperature	0°C~55C
Discharge Temperature	-20C~60C
Storage Temperature	-20°C~60C
Operating/Storage/humidity	5% - 95%RH
Max Operating Altitude	<4000m
IP Rating	IP20
Cell Type	LifePO4, Lithium Iron Phosphate
Cycle life	6000 Cycles @ 80% DOD/25°C/0.5C
Cell Configuration	1P8S
Scalability	Max 16 batteries in parallel

LiFe

Alaska® BATTERIES

ہر لمحہ اعتماد

A-LiFe25100

25.6V 100AH

Lithium LiFePO4 Battery offers a significant weight reduction, enormous energy reserves and stable voltage even under extreme loads. The Lithium LFP battery is specifically developed to fully meet the high demands placed on a storage battery. It enables high safety and cyclic life span are guaranteed even with regular deep discharges with its enhanced chemistry, which offers numerous advantages in a variety of applications.


Product Features

- LiFePO4 cell (3.2V), higher reliability
- Longer Cycle Life
- Fully replaceable with current batteries (Lead-acid, Ni-Cd)
- Lithium iron phosphate technology, safe and reliable.
- Maintenance free with 50% lighter than lead acid batteries
- Optimum adaptation to variety of applications with series & parallel expansion support

Product Applications

UPS | Signals | EPS

Base Station | Electric Vehicle | Other Power Uses | Solar Power

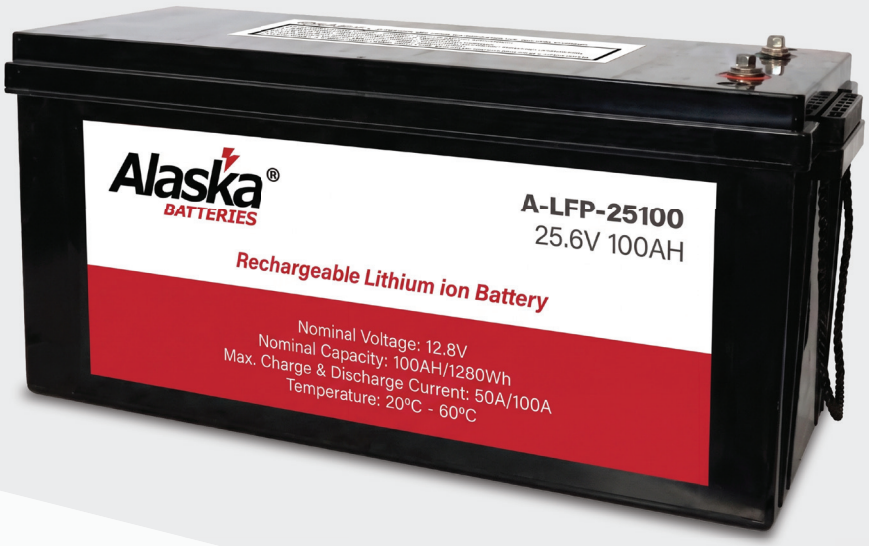

LiFe

Model: A-LiFe 25.6V 100AH

Technical Specifications

Battery Type	Lithium Iron Phosphate Battery ($LiFePO_4$/LFP)
Nominal Voltage	25.6V
Nominal Capacity(@0.2C)	100Ah (8S1P)
Nominal Energy	2560Wh
Internal Resistance	50m2
Self Discharge Rate	≤3.5% per month
Cycle Life (@20-28C, 0.2C, 90% DOD)	3650 Cycles
Parallel Connected Function	No more than 2 groups in parallel
Series Connected Function	No more than 2 groups in series
Charging Limited Voltage/Float	28.8V/27.6V+0.2V
Charge Voltage (For Standby use)	-
Max. Charging Current	60A
Discharging Cut-off Voltage	20.0V
Max. Discharging Continuous Current	60A
Max. Discharging Pulse Current	120A, <3S
Dimension (WxDxHxTH mm)	532 x 206 x 215 x 217mm
Weight	Approx. 24.0Kg
Terminal	M8
Charge Temperature	0C~45C (32°F to 113°F)
Discharge Temperature	-20°°C to 60°°C (-4°F to 140°F)
Storage Temperature	0°C to 45C (32°F to 113°F)
Humidity	0-95%, No condensation
Temperature protection	Integrated in BMS
Safety Standard	IEC 62619 at cell level
Water Dust Resistance	IP55

LiFe

Alaska® BATTERIES

ہر لمحہ اعتماد

A-LiFe1260

12.8V 60AH

A 12.8V 60Ah lithium battery is suitable for a variety of applications, including solar energy systems, RVs, electric bikes and scooters, backup power systems, and more. It can also power wheelchairs, portable power banks, and even jump starters for vehicles. They can also be used in portable power banks, jump starters for vehicles, and various other devices requiring a 12V power source.

Product Features

- LiFePO4 cell (3.2V), higher reliability
- Longer Cycle Life
- Fully replaceable with current batteries (Lead-acid, Ni-Cd)
- Lithium iron phosphate technology, safe and reliable.
- Maintenance free with 50% lighter than lead acid batteries
- Optimum adaptation to variety of applications with series & parallel expansion support

Product Applications

UPS

Signals

EPS

Base Station

Electric Vehicle

Other Power Uses

Solar Power



LiFe

Model: A-LiFe 12.8V 60AH

Technical Specifications

Nominal Voltage	12.8V
Nominal Capacity	60Ah (4S2P)
Nominal Energy	768Wh
Internal Resistance	≤50mQ
Self Discharge Rate	<3.5% per month
Cycle Life (@25C,0.2C,50%DOD)	6000 Cycles
Parallel Connected Function	no more than 2 groups
Series Connected Function	no more than 4 groups
Recommended Charging Voltage	14.0~14.6V
Max. Charging Current	30A
Discharging Cut-off Voltage	10V
Max. Discharging Continuous Current	60A
Max. Discharging Pulse Current	120 A≤3S
Dimension (WxDxHxTH mm)	229 x 138 x 210 x 210mm
Weight	Approx. 6.7Kg
Terminal	M6
Charging Temperature	0°C ~ 45C (32°F ~ 113°F)
Discharge Temperature	-20°°C ~60°°C (-4°F ~140°F)
Storage Temperature	0°C ~ 45C (32°F ~ 113°F)
Safety Standard	UL 1642 at cell level
Water Dust Resistance	IP55

LiFe

Alaska® BATTERIES

ہر لمحہ اعتماد

A-LiFe12100

12.8V 100AH

Lithium 12.8V 100AH Battery is a suitable SLA battery Replacement for UPS, Signal, EPS, SolarPower, Base Station, Electric Vehicle, etc.


Product Features

- LiFePO4 cell (3.2V), higher reliability
- Longer Cycle Life
- Fully replaceable with current batteries (Lead-acid, Ni-Cd)
- Lithium iron phosphate technology, safe and reliable.
- Maintenance free with 50% lighter than lead acid batteries
- Optimum adaptation to variety of applications with series & parallel expansion support

Product Applications

UPS | Signals | EPS

Base Station | Electric Vehicle | Other Power Uses | Solar Power

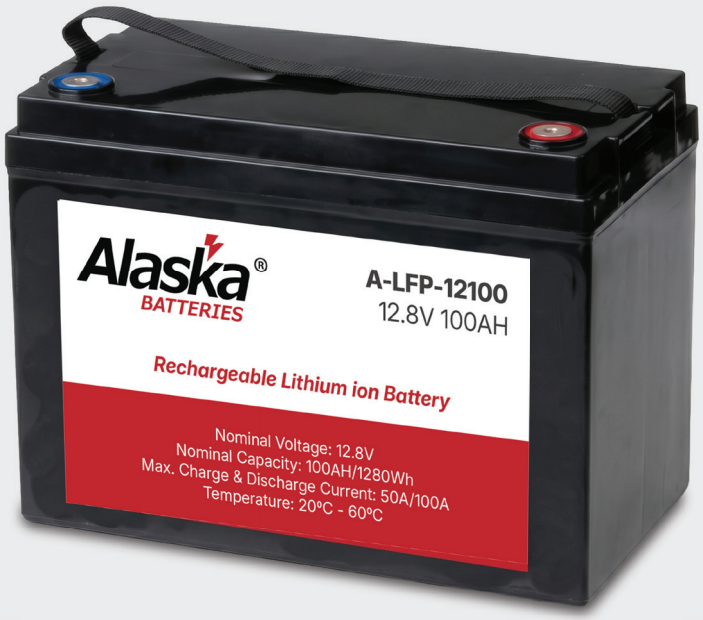

LiFe

Model: A-LiFe 12.8V 100AH

Technical Specifications

Nominal Voltage	12.8V
Nominal Capacity	100Ah (4S1P)
Nominal Energy	1280Wh
Internal Resistance	≤45mQ
Self Discharge Rate	<3.5% per month
Cycle Life (@25C, 0.2C, 50%DOD)	6000 Cycles
Parallel Connected Function	No more than 4 groups
Series Connected Function	No more than 4 groups
Recommended Charging Voltage	14.0~14.6V
Max. Charging Current	50A
Discharging Cut-off Voltage	10V
Max. Discharging Continuous Current	100A
Max. Discharging Pulse Current	200 A≤3S
Dimension (WxDxHxTH mm)	328 x 172 x 215 x 220mm
Weight	Approx. 13.1Kg
Terminal	M8
Charging Temperature	0°C ~ 45C (32°F ~ 113°F)
Discharge Temperature	-20°°C~60°C (-4°F ~140°F)
Storage Temperature	0°C ~ 45C (32°F ~113°F)
Safety Standard	UL 1642 at cell level
Water Dust Resistance	IP55

LiFe

Alaska® BATTERIES

ہر لمحہ اعتماد

A-LiFe12150

12.8V 150AH

12V LFP batteries are designed for small home solar systems and other such as UPS, Signal, EPS, Solar Power, Base Station, Electric Vehicle etc. Besides, they are also a direct replacement for lead-acid batteries. With the same size and same type of terminal, you can easily upgrade the old lead battery system into lithium.

Product Features

- LiFePO4 cell (3.2V), higher reliability
- Longer Cycle Life
- Fully replaceable with current batteries (Lead-acid, Ni-Cd)
- Lithium iron phosphate technology, safe and reliable.
- Maintenance free with 50% lighter than lead acid batteries
- Optimum adaptation to variety of applications with series & parallel expansion support

Product Applications

UPS | Signals | EPS

Base Station | Electric Vehicle | Other Power Uses | Solar Power



LiFe

Model: A-LiFe 12.8V 150AH

Technical Specifications

Nominal Voltage	12.8V
Nominal Capacity	150Ah (4S1P)
Nominal Energy	1920Wh
Internal Resistance	≤45mQ
Self Discharge Rate	<3.5% per month
Cycle Life (@25C,0.2C,50%DOD)	6000 Cycles
Parallel Connected Function	No more than 2 groups
Series Connected Function	No more than 4 groups
Recommended Charging Voltage	14.0~14.6V
Max. Charging Current	75A
Discharging Cut-off Voltage	10V
Max. Discharging Continuous Current	100A
Max. Discharging Pulse Current	200 A≤3S
Dimension (WxDxHxTH mm)	483 x 170 x 240 x 240mm
Weight	Approx. 19.2Kg
Terminal	M8
Charging Temperature	0°C ~45°C (32°F ~ 113°F)
Discharge Temperature	-20C~60°C (-4°F~140°F)
Storage Temperature	0°C ~45C (32°F ~ 113°F)
Safety Standard	UL 1642 at cell level
Water Dust Resistance	IP55

LiFe

Alaska® BATTERIES

ہر لمحہ اعتماد

A-LiFe12200

12.8V 200AH

Suitable for solar energy storage system, provide emergency back up power, UPS, Inverter, Railway signalling, Telecommunication, Medical equipments, Security communications, Transportation logistics and so on.


Product Features

- $LiFePO_4$ cell (3.2V), higher reliability
- Longer Cycle Life
- Fully replaceable with current batteries (Lead-acid, Ni-Cd)
- Lithium iron phosphate technology, safe and reliable.
- Maintenance free with 50% lighter than lead acid batteries
- Optimum adaptation to variety of applications with series & parallel expansion support

Product Applications

UPS | Signals | EPS

Base Station | Electric Vehicle | Other Power Uses | Solar Power

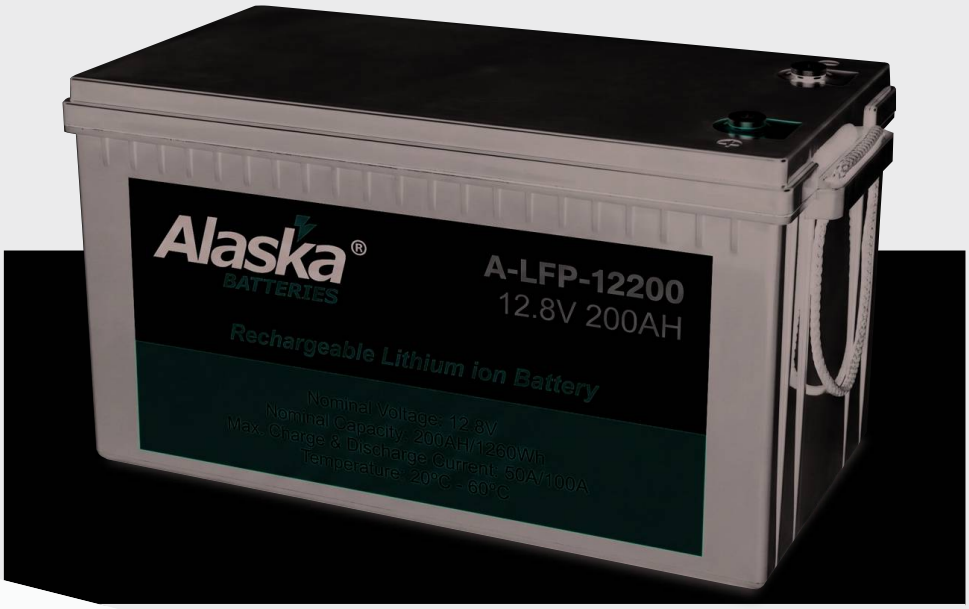

LiFe

Model: A-LiFe 12.8V 200AH

Technical Specifications

Nominal Voltage	12.8V
Nominal Capacity	200Ah (4S2P)
Nominal Energy	2560Wh
Internal Resistance	<35mQ
Self Discharge Rate	<3.5% per month
Cycle Life (@25C,0.2C,50%DOD)	6000 Cycles
Parallel Connected Function	No more than 4 groups
Series Connected Function	No more than 4 groups
Recommended Charging Voltage	14.0~14.6V
Max. Charging Current	100A
Discharging Cut-off Voltage	10V
Max. Discharging Continuous Current	100A
Max. Discharging Pulse Current	200 A≤3S
Dimension (WxDxHxTH mm)	522 x 238 x 218 x 220mm
Weight	Approx. 27Kg
Terminal	M8
Charging Temperature	0°C ~ 45C (32°F ~ 113°F)
Discharge Temperature	-20°C ~ 60°°C (-4°F ~ 140°F)
Storage Temperature	0°C ~ 45C (32°F ~ 113°F)
Safety Standard	UL 1642 at cell level
Water Dust Resistance	IP55

LiFe

Alaska®

BATTERIES

ہر لمحہ اعتماد

LiFe

LITHIUM BATTERIES