

NEMA 23 Power-Off Brakes

Compatible with NEMA 23 ClearPath and Hudson servo motors

MPC023-24-001-T

Specifications	
Brake type	Spring applied, power-off, NEMA face mount
Dimensions	51mm length (±1.0); 57mm x 57mm wide Output shaft diameter: 3/8 inch Input shaft diameter: 3/8 inch
Clamp collar screw torque	3.8 Nm
Weight	1.1 lbs (17.6 oz)
Voltage requirement	24 VDC nominal (20 VDC min)
Current draw	0.31 Amps
Output	0.5 Nm holding torque
Input	6000 RPM max speed
Environmental Rating	IP54
Maximum Radial Load	25 lbf (111.2 N)
Emergency stop cycles (brake actuates while the motor is spinning)	*Emergency stops will reduce the life of the brake. Contact Teknic for more details.
No speed actuations (brake actuates while the motor is not spinning)	300,000 (min)
Engage time (time required for the brake to engage after 24VDC is removed)	10 ms (max)
Disengage time	20 ms (max)



3D Drawings 

2D Drawings 

Brake User Manual 

Part Number	Qty 1-9	Qty 10-49	Qty 50-99	Qty 100-199	200+
MPC023-24-001-T	\$245	Requires quick registration		CONTACT	

Quantity


1

Add to cart 

Ships in 3 Days (first 5 units)


Warranty	3 years
Manufacturer	Newstart Motion (China)

Compatible Products

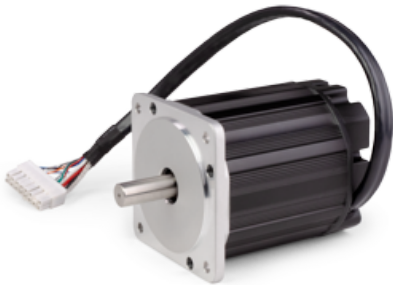

HUDSON
BRUSHLESS SERVO MOTORS

[Learn More](#)



ClearPath
INTEGRATED SERVO MOTORS

[Learn More](#)



PWR-IO-24VDC
24 VDC POWER SUPPLY

[Learn More](#)