
LCD Parameter Description

1. Physical Diagram

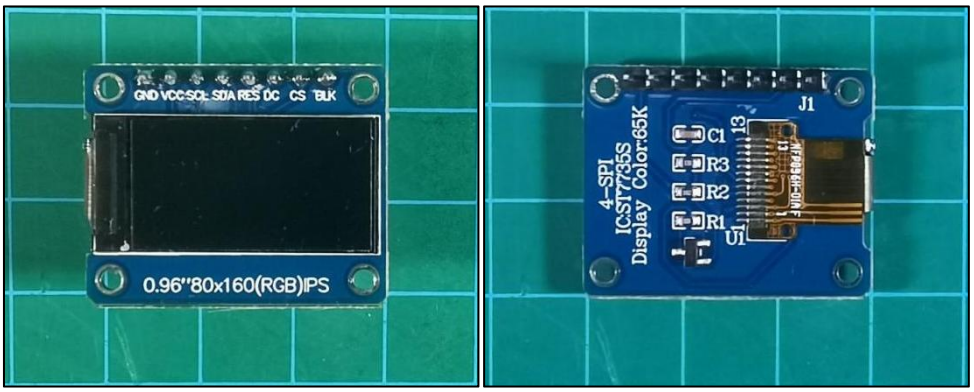


2. Parameter Description

Size	0.96 inch	Display area	10.8X21696(mm)
Operating voltage	3.3V	Physical dimension	24*30(mm)
Module weight	5g	Connector type	SPI port
Control chip	ST7335	Number of PIN	7PIN
Displayed color	65K full-color	Operating temperature	-20°C~70°C
Material	The brand new IPS color screen features colors that are more vibrant compared to regular TET LCD screens.		
Resolution	The display orientation of 80*160 can be adjusted, supporting both landscape and portrait modes		

Pin definition	1> GND (power ground); 2> VCC (power positive 3.3~5V); 3> SCL (SPI clock line) 4> SDA (SPI data line); 5> RES (OLED reset - OLED needs to be reset once after powering on) 6> DC (SPI data/command selection pin) 7> BLK (LCD backlight control - the default can be left floating at a low level to turn off the backlight)

3. Size & Structure

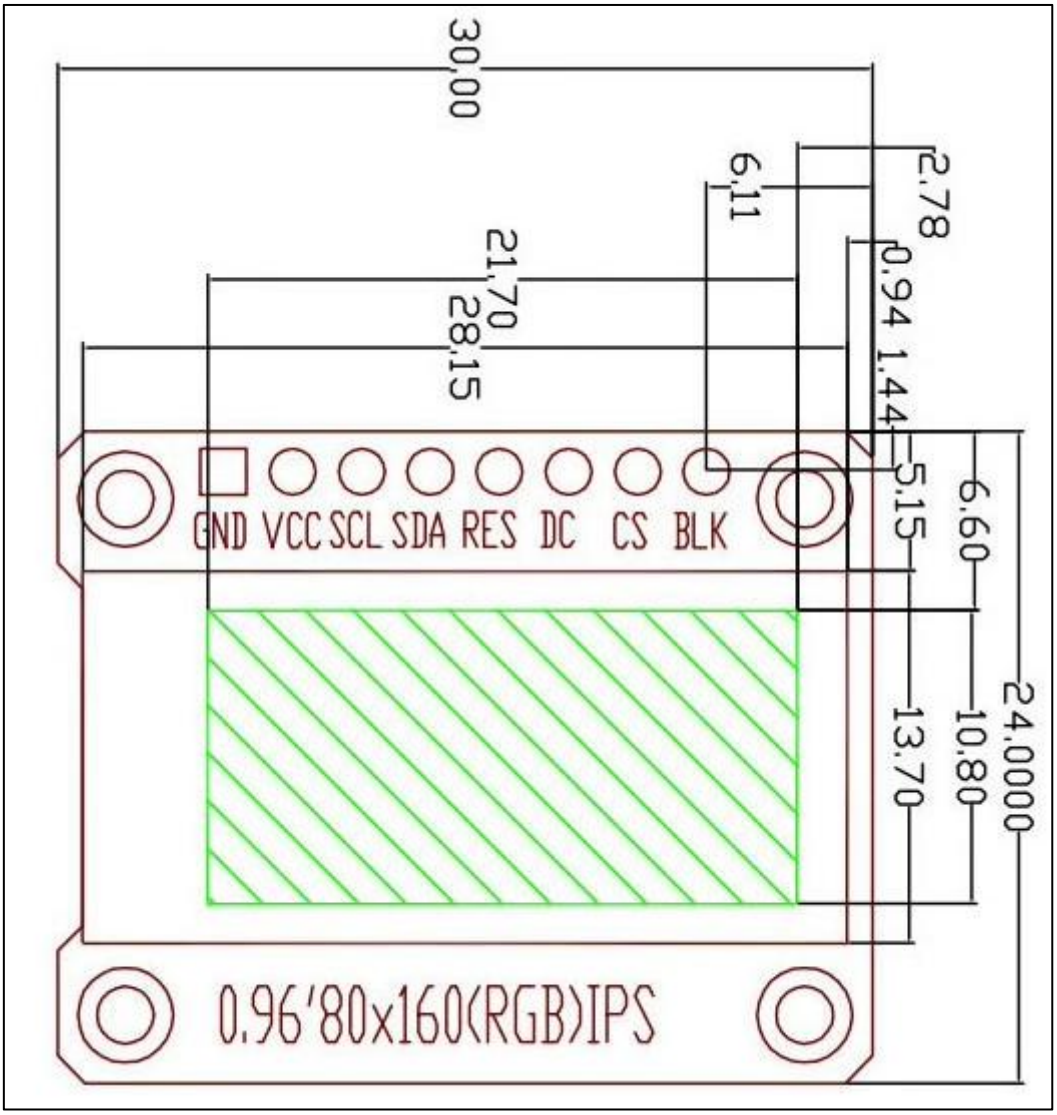

4. Use Instructions

For information on how to use the LCD, please refer to: "3. RosRobot Controller Program Analysis/Lesson 19 RCC LVGL Introduction and Source Code Analysis".