

Usage and Precautions of LiPo Batteries

1. Precautions

1) When connecting the battery leads, do not connect them directly to the lithium battery without connecting them to the control board! Avoid contact between positive and negative terminals to prevent short circuits!

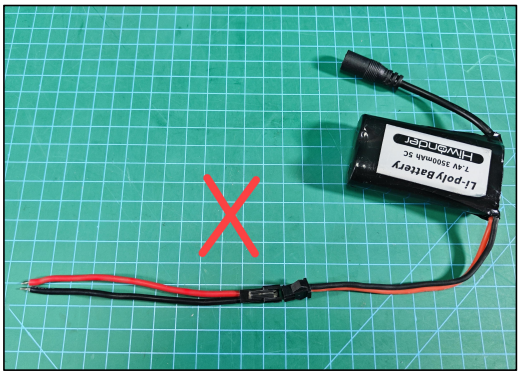

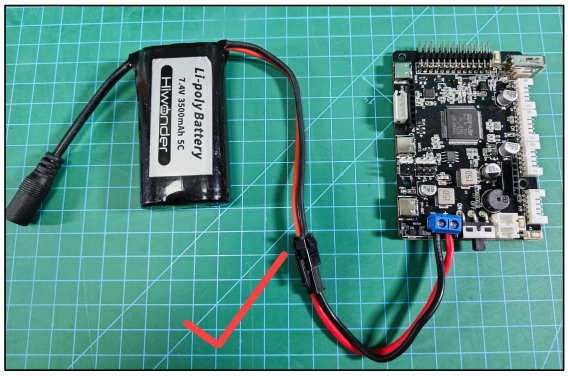

2) When connecting the battery leads to the control board, ensure the red end connects to the positive terminal and the black end to the negative terminal, and do not reverse them!

3) The battery leads are designed to prevent reverse insertion. Do not force them into the battery to avoid damaging the interface.

4) Please use the charger provided with the lithium battery for charging.

5) When the charger is connected to the battery without connecting to the power source, the indicator light is green.

6) Store the battery in a cool, dry environment to prevent shortening its lifespan due to overheating or moisture.

7) Do not strike, throw, or step on the battery.

8) Avoid using the battery in environments with strong static electricity or magnetic fields, as this can damage the battery's safety protection mechanism.


9) Do not use metal objects to connect the positive and negative terminals of the battery.

10) Do not plug the battery into a power outlet.


2. Battery Connection Method

Taking the example of powering with a 7.4V 3500mA battery:


1) Take out the power connection cable and the Hiwonder Car Controller.

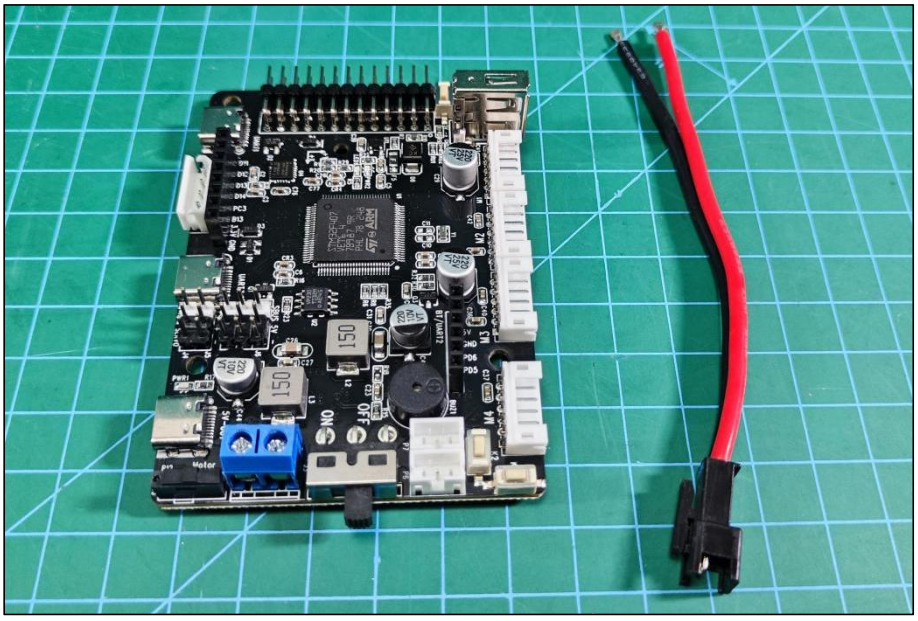


2) Loosen the screw on the power interface of the controller.

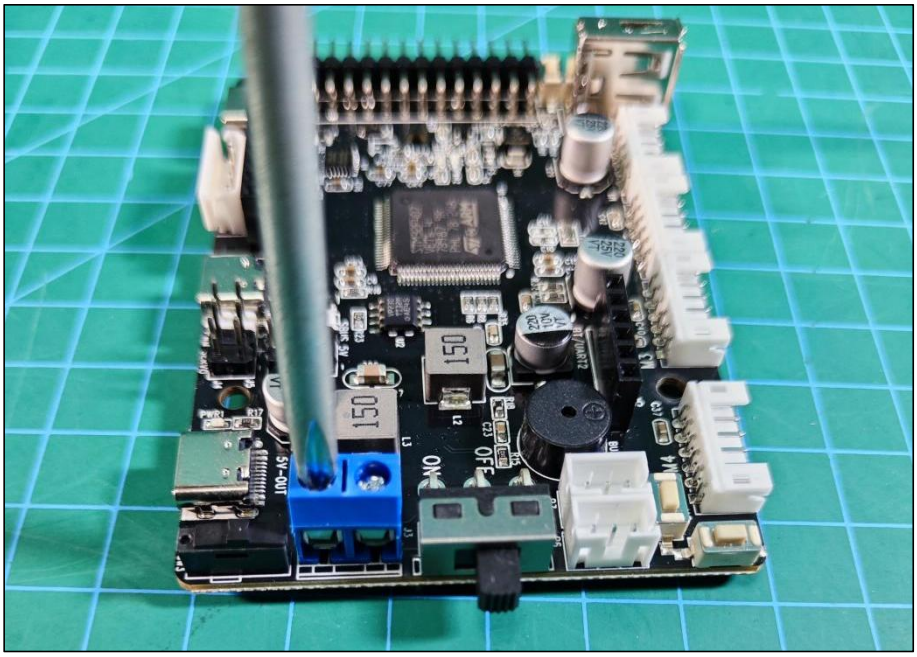


3) After loosening, connect the red wire of the power connection cable to the '+' terminal and the black wire to the '-' terminal of the controller's power interface (be extremely careful not to reverse the polarity, as it may damage the control board).

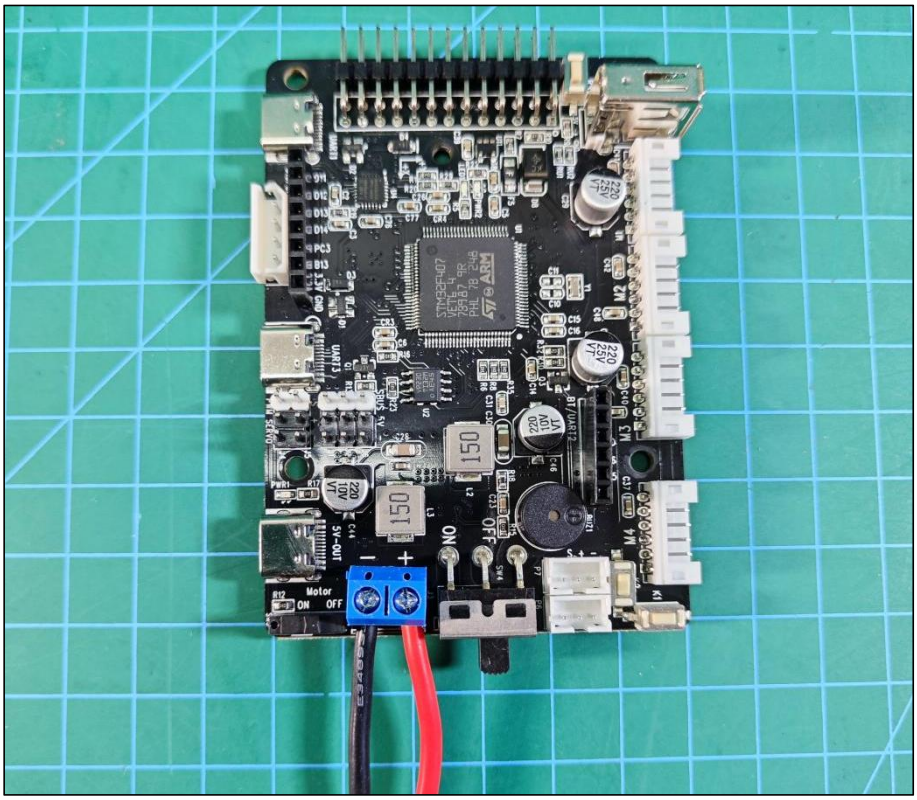

4) Once connected, tighten the screw securely.

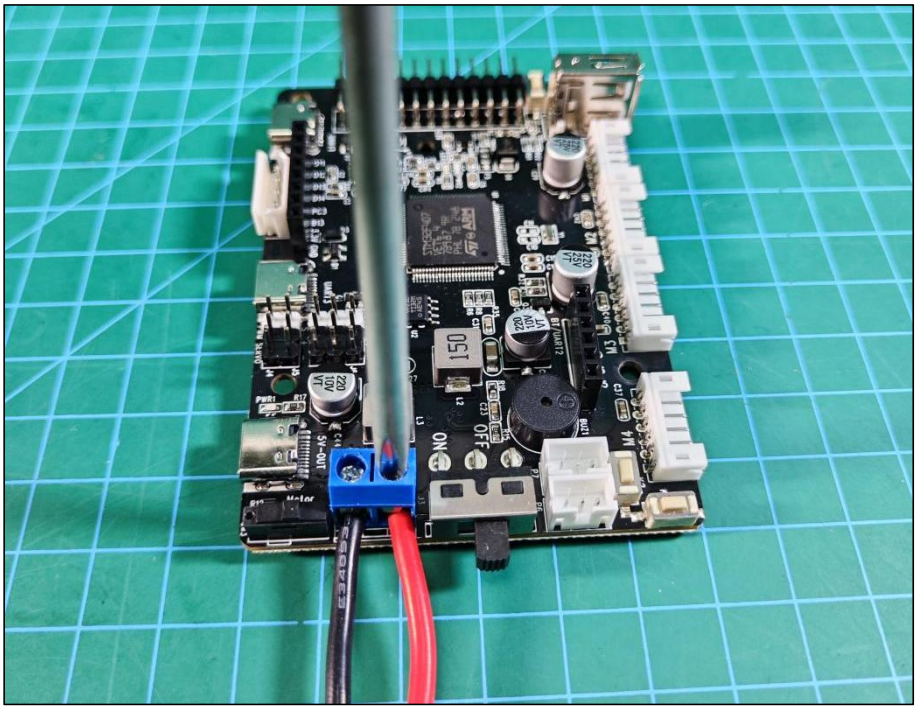


5) Take out the 7.4V lithium battery.

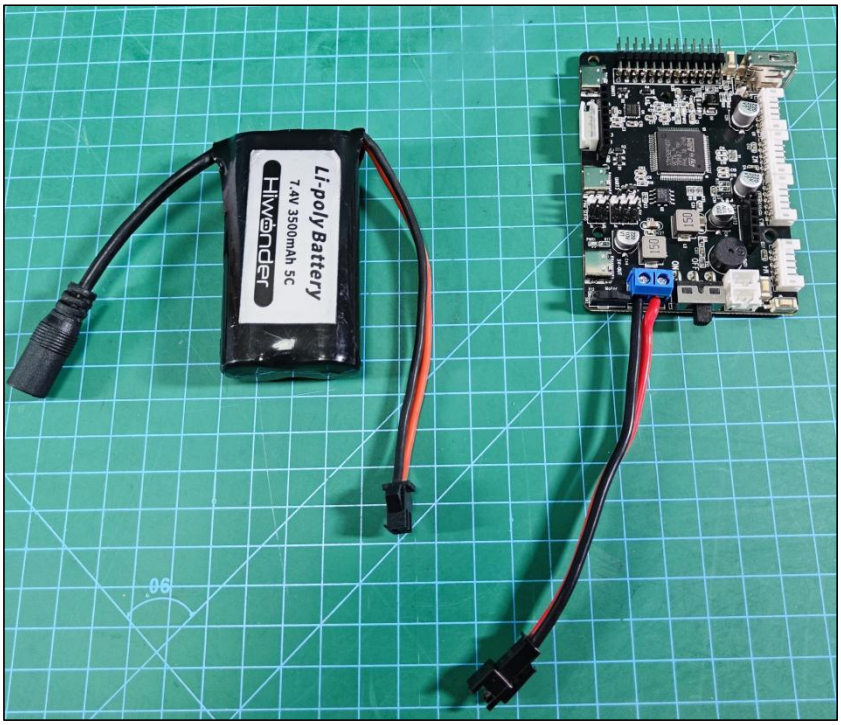

6) Connect the power connection cable from the lithium battery to the controller's power connection cable, ensuring a 'red to red, black to black'

connection (here, a reverse-insertion prevention design is used, so do not force it; if it doesn't fit, try rotating it to another side).

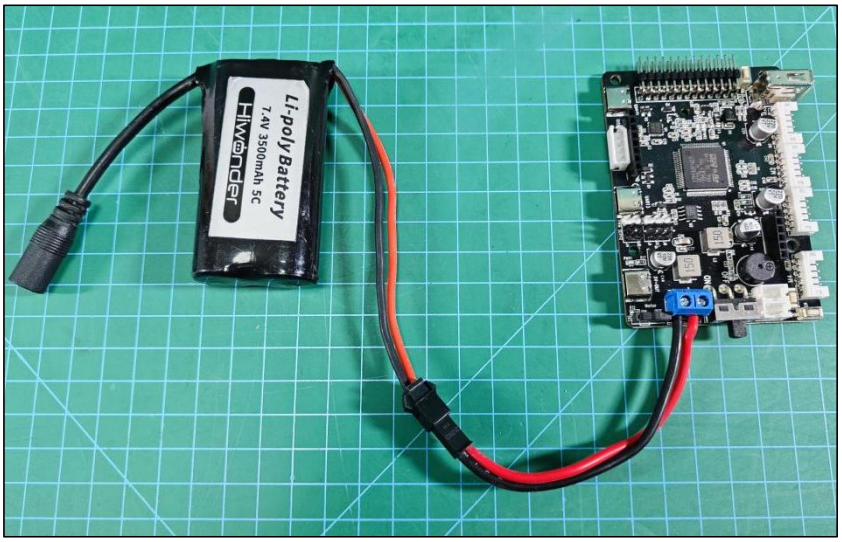

3. Charging Method

1) Connect the DC plug of the battery to the dedicated charger plug provided in the kit, as shown in the figure below:



2) Then, plug the charger into the socket. Users can check the indicator lights

on the charger to understand the charging status. Red indicates charging, while green indicates charging is complete.





Note: Please unplug the battery charger in time to avoid overcharging.