BirdNET microphone HAT | TOP

Assembly locator | source d093773 | mono | 2026-10-17 | viewed from top

Fitted: 22

Red dot: pad 1

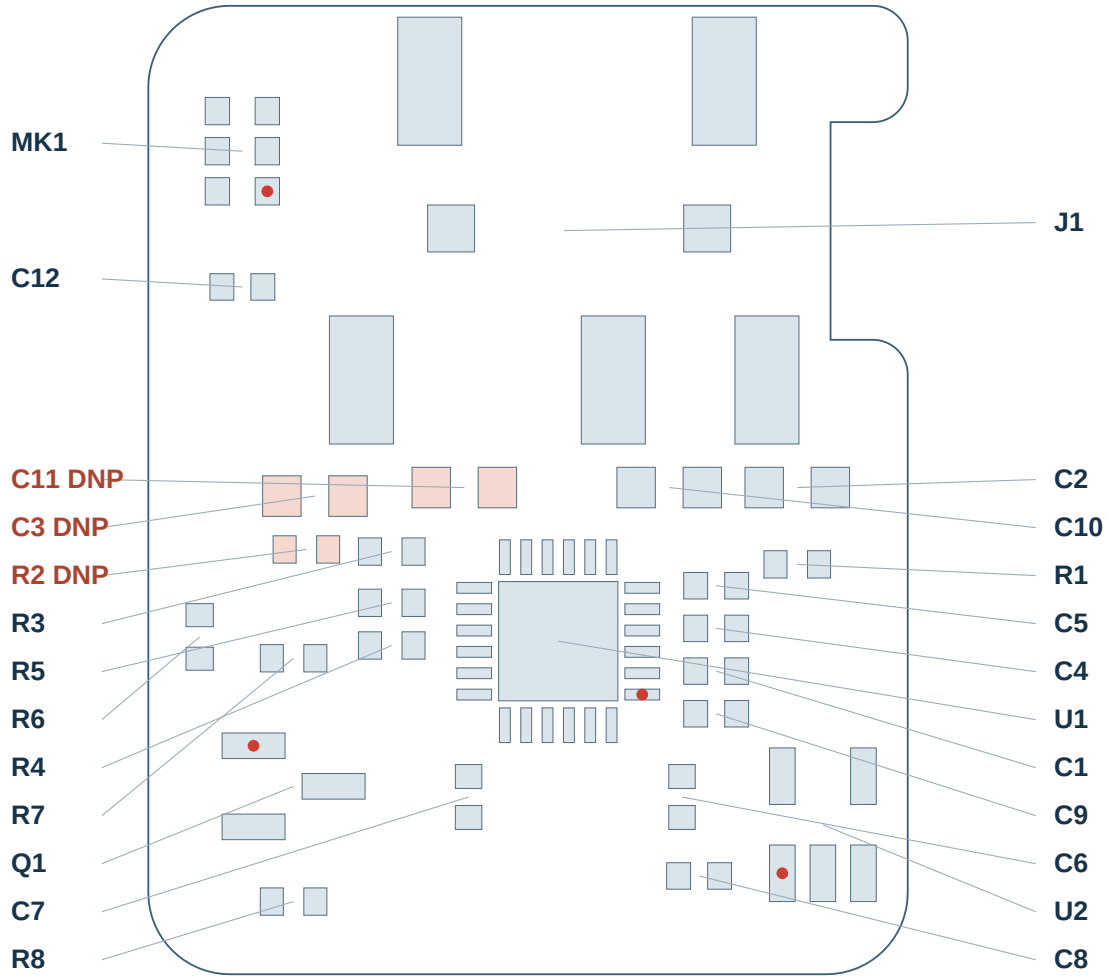

Pad outlines and pin 1 shown. Native CPL rotations require JLCPCB placement preview. Drawing is not a stencil.

DNP: C3, C11, R2. Keep the top microphone port clear. Bottom assembly contains J3 only.

BirdNET microphone HAT | BOTTOM

Assembly locator | source d093773 | mono | 2026-10-17 | viewed from bottom

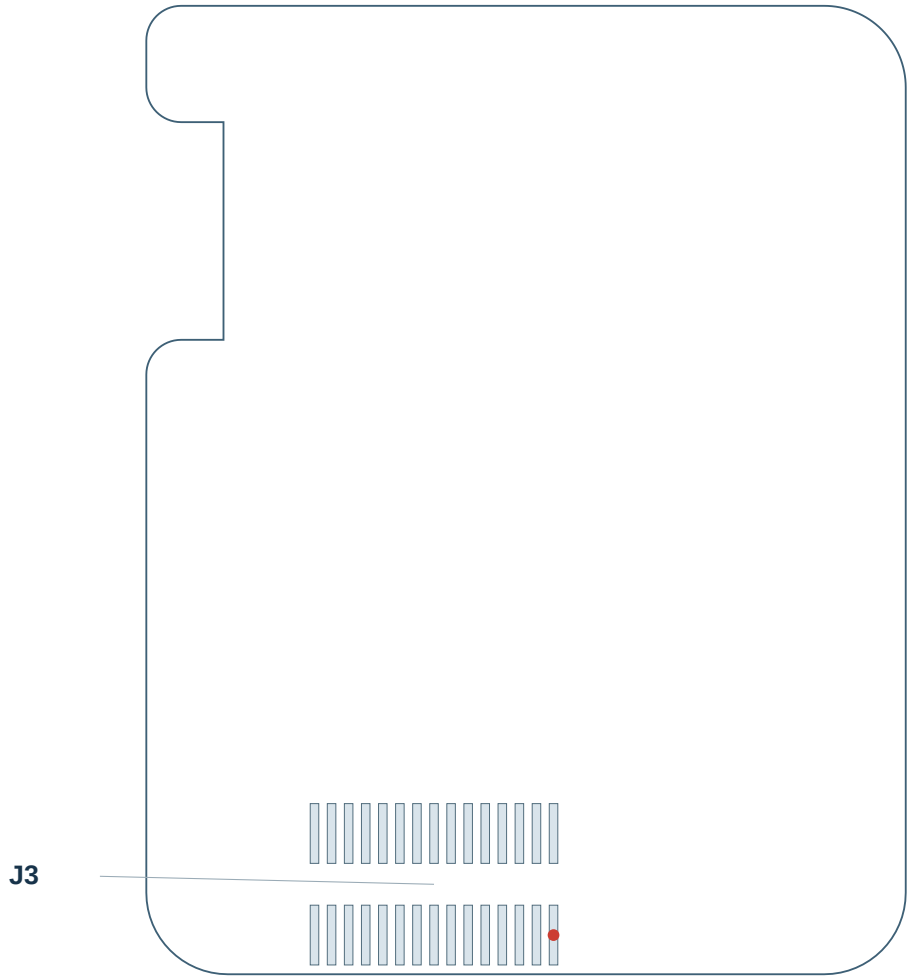

Fitted: 1

Red dot: pad 1

Pad outlines and pin 1 shown. Native CPL rotations require JLCPCB placement preview. Drawing is not a stencil.

DNP: C3, C11, R2. Keep the top microphone port clear. Bottom assembly contains J3 only.