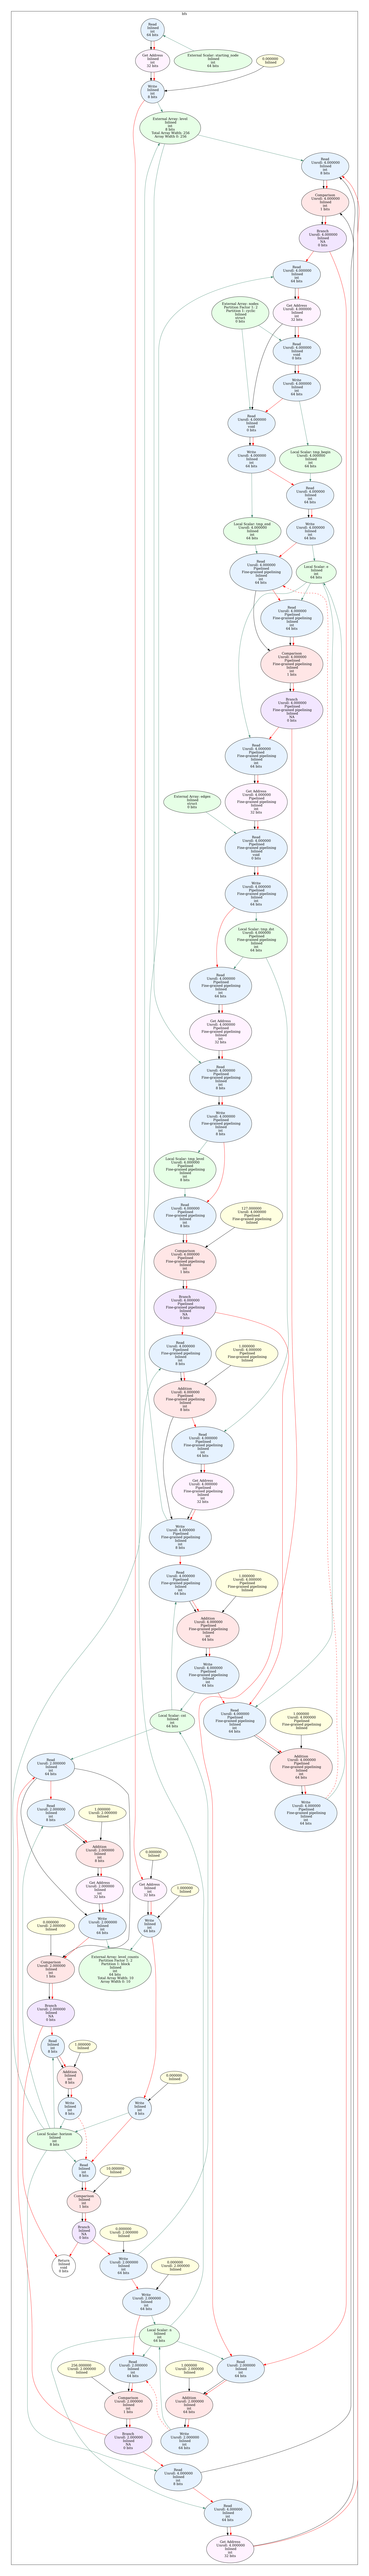
kn
Read
Uint8_t 8.000000
Inlined
64 bits
Get Address
Inlined
12 bits
External Array: starting node
Inlined
64 bits
0.000000
Inlined
Write
Uint8_t 8.000000
Inlined
64 bits
External Array: head
Inlined
8 bits
Total Array Width: 256
Array Width 0: 256
Read
Uint8_t 8.000000
Inlined
64 bits
Comparison
Uint8_t 8.000000
Inlined
1 bits
Branch
Uint8_t 0.000000
Inlined
64 bits
Read
Uint8_t 8.000000
Inlined
64 bits
External Array: active
Inlined
8 bits
Get Address
Uint8_t 8.000000
Inlined
12 bits
Read
Uint8_t 8.000000
Inlined
8 bits
Write
Uint8_t 8.000000
Inlined
64 bits
Read
Uint8_t 8.000000
Inlined
64 bits
Write
Uint8_t 8.000000
Inlined
64 bits
Local Scalar: temp_begin
Inlined
64 bits
Read
Uint8_t 8.000000
Inlined
64 bits
Local Scalar: temp_end
Uint8_t 8.000000
Inlined
64 bits
Write
Uint8_t 8.000000
Inlined
64 bits
Read
Uint8_t 8.000000
Fine-grained pipelining
Inlined
64 bits
Local Scalar: n
Inlined
64 bits
Read
Uint8_t 8.000000
Fine-grained pipelining
Inlined
64 bits
Comparison
Uint8_t 8.000000
Fine-grained pipelining
Inlined
1 bits
Branch
Uint8_t 0.000000
Fine-grained pipelining
Inlined
0 bits
Read
Uint8_t 8.000000
Fine-grained pipelining
Inlined
64 bits
External Array: edges
Inlined
0 bits
Get Address
Uint8_t 8.000000
Fine-grained pipelining
Inlined
12 bits
Read
Uint8_t 8.000000
Fine-grained pipelining
Inlined
8 bits
Add
Uint8_t 8.000000
Fine-grained pipelining
Inlined
64 bits
Local Scalar: temp_dst
Uint8_t 8.000000
Inlined
64 bits
Read
Uint8_t 8.000000
Pipelined
Fine-grained pipelining
Inlined
64 bits
Get Address
Uint8_t 8.000000
Pipelined
Fine-grained pipelining
Inlined
12 bits
Read
Uint8_t 8.000000
Pipelined
Fine-grained pipelining
Inlined
8 bits
Write
Uint8_t 8.000000
Pipelined
Fine-grained pipelining
Inlined
8 bits
Local Scalar: temp_dst
Uint8_t 8.000000
Pipelined
Fine-grained pipelining
Inlined
64 bits
Read
Uint8_t 8.000000
Pipelined
Fine-grained pipelining
Inlined
64 bits
127.000000
Uint8_t 8.000000
Pipelined
Fine-grained pipelining
Inlined
Comparison
Uint8_t 8.000000
Pipelined
Fine-grained pipelining
Inlined
1 bits
Branch
Uint8_t 0.000000
Pipelined
Fine-grained pipelining
Inlined
0 bits
Read
Uint8_t 8.000000
Fine-grained pipelining
Inlined
8 bits
1.000000
Uint8_t 8.000000
Fine-grained pipelining
Inlined
Add
Uint8_t 8.000000
Fine-grained pipelining
Inlined
8 bits
Read
Uint8_t 8.000000
Fine-grained pipelining
Inlined
64 bits
Get Address
Uint8_t 8.000000
Pipelined
Fine-grained pipelining
Inlined
12 bits
Read
Uint8_t 8.000000
Pipelined
Fine-grained pipelining
Inlined
8 bits
Add
Uint8_t 8.000000
Pipelined
Fine-grained pipelining
Inlined
8 bits
Write
Uint8_t 8.000000
Pipelined
Fine-grained pipelining
Inlined
64 bits
Local Scalar: dst
Inlined
64 bits
Read
Uint8_t 8.000000
Pipelined
Fine-grained pipelining
Inlined
64 bits
1.000000
Uint8_t 8.000000
Pipelined
Fine-grained pipelining
Inlined
Add
Uint8_t 8.000000
Fine-grained pipelining
Inlined
64 bits
Write
Uint8_t 8.000000
Pipelined
Fine-grained pipelining
Inlined
64 bits
Read
Uint8_t 8.000000
Inlined
64 bits
1.000000
Uint8_t 8.000000
Inlined
Add
Uint8_t 8.000000
Inlined
8 bits
Get Address
Uint8_t 8.000000
Inlined
12 bits
4.000000
Uint8_t 8.000000
Inlined
Get Address
Uint8_t 8.000000
Inlined
12 bits
1.000000
Inlined
Write
Uint8_t 8.000000
Inlined
64 bits
4.000000
Uint8_t 8.000000
Inlined
External Array: next_inputs
Partition Factor: 0_0
Inlined
Total Array Width: 16
Array Width 0: 16
Comparison
Uint8_t 8.000000
Inlined
1 bits
Branch
Uint8_t 0.000000
Inlined
0 bits
Read
Inlined
8 bits
1.000000
Inlined
Add
Inlined
8 bits
Write
Inlined
8 bits
5.000000
Inlined
Write
Inlined
8 bits
Local Scalar: bottom
Inlined
8 bits
Read
Inlined
8 bits
15.000000
Inlined
Comparison
Inlined
1 bits
Branch
Inlined
0 bits
5.000000
Uint8_t 8.000000
Inlined
Jittering
Inlined
0 bits
Write
Uint8_t 8.000000
Inlined
64 bits
1.000000
Uint8_t 8.000000
Inlined
Write
Uint8_t 8.000000
Inlined
64 bits
Local Scalar: n
Inlined
64 bits
256.000000
Uint8_t 8.000000
Inlined
Read
Uint8_t 8.000000
Inlined
64 bits
1.000000
Uint8_t 8.000000
Inlined
Read
Uint8_t 8.000000
Inlined
64 bits
Comparison
Uint8_t 8.000000
Inlined
1 bits
Add
Uint8_t 8.000000
Inlined
64 bits
Branch
Uint8_t 0.000000
Inlined
0 bits
Write
Uint8_t 8.000000
Inlined
64 bits
Read
Uint8_t 8.000000
Inlined
8 bits
Read
Uint8_t 8.000000
Inlined
64 bits
Write
Uint8_t 8.000000
Inlined
64 bits
Get Address
Uint8_t 8.000000
Inlined
12 bits