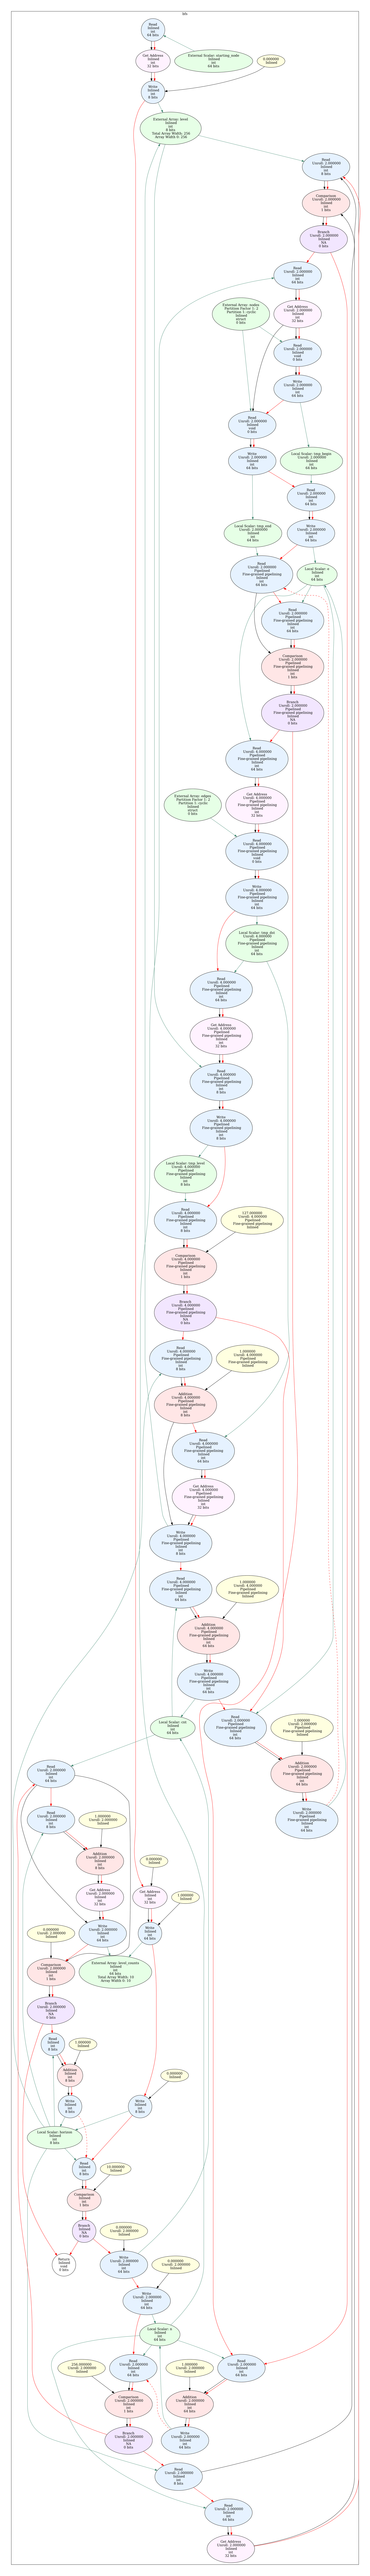
kn
Read
Uint8_t 2400000
Stalled
64 bits
Get Address
Stalled
Uint8_t
32 bits
External Array: starting_node
Stalled
Uint8_t
64 bits
0.000000
Stalled
Write
Uint8_t 2400000
Stalled
64 bits
External Array: head
Stalled
Uint8_t
Total Array Width: 256
Array Width 0: 256
Read
Uint8_t 2400000
Stalled
64 bits
Comparison
Uint8_t 2400000
Equal
1 bits
Branch
Uint8_t 2400000
Stalled
0 bits
Read
Uint8_t 2400000
Stalled
64 bits
External Array: nodes
Partition Factor 2_2
Stalled
Uint8_t
8 bits
Get Address
Uint8_t 2400000
Stalled
32 bits
Read
Uint8_t 2400000
Stalled
64 bits
Write
Uint8_t 2400000
Stalled
64 bits
Add
Uint8_t 2400000
Equal
1 bits
Write
Uint8_t 2400000
Stalled
64 bits
Local Scalar: temp_bases
Uint8_t 2400000
Stalled
64 bits
Read
Uint8_t 2400000
Stalled
64 bits
Local Scalar: temp_end
Uint8_t 2400000
Stalled
64 bits
Write
Uint8_t 2400000
Stalled
64 bits
Read
Uint8_t 4800000
Flow-pruned pipelining
Stalled
64 bits
Local Scalar: c
Uint8_t
64 bits
Read
Uint8_t 4800000
Flow-pruned pipelining
Stalled
64 bits
Comparison
Uint8_t 2400000
Flow-pruned pipelining
Stalled
1 bits
Branch
Uint8_t 2400000
Flow-pruned pipelining
Stalled
0 bits
Read
Uint8_t 4800000
Flow-pruned pipelining
Stalled
64 bits
External Array: edges
Partition Factor 2_2
Flow-pruned pipelining
Stalled
Uint8_t
8 bits
Get Address
Uint8_t 4800000
Flow-pruned pipelining
Stalled
32 bits
Read
Uint8_t 4800000
Flow-pruned pipelining
Stalled
64 bits
Write
Uint8_t 4800000
Flow-pruned pipelining
Stalled
64 bits
Local Scalar: temp_dst
Uint8_t 4800000
Flow-pruned pipelining
Stalled
64 bits
Read
Uint8_t 4800000
Flow-pruned pipelining
Stalled
64 bits
Get Address
Uint8_t 4800000
Flow-pruned pipelining
Stalled
32 bits
Read
Uint8_t 4800000
Flow-pruned pipelining
Stalled
64 bits
Comparison
Uint8_t 4800000
Flow-pruned pipelining
Stalled
1 bits
Local Scalar: temp_bool
Uint8_t 4800000
Flow-pruned pipelining
Stalled
8 bits
Read
Uint8_t 4800000
Flow-pruned pipelining
Stalled
64 bits
117.000000
Uint8_t 4800000
Flipelined
Flow-pruned pipelining
Stalled
Comparison
Uint8_t 4800000
Flipelined
Flow-pruned pipelining
N/A
1 bits
Branch
Uint8_t 4800000
Flipelined
Flow-pruned pipelining
N/A
0 bits
Read
Uint8_t 4800000
Flipelined
Flow-pruned pipelining
Stalled
8 bits
1.000000
Uint8_t 4800000
Flipelined
Flow-pruned pipelining
Stalled
Addition
Uint8_t 4800000
Flipelined
Flow-pruned pipelining
Stalled
8 bits
Read
Uint8_t 4800000
Flow-pruned pipelining
Stalled
64 bits
Get Address
Uint8_t 4800000
Flipelined
Flow-pruned pipelining
Stalled
32 bits
Write
Uint8_t 4800000
Flow-pruned pipelining
Stalled
64 bits
Read
Uint8_t 4800000
Flipelined
Flow-pruned pipelining
Stalled
64 bits
1.000000
Uint8_t 4800000
Flipelined
Flow-pruned pipelining
Stalled
Write
Uint8_t 4800000
Flipelined
Flow-pruned pipelining
Stalled
64 bits
Local Scalar: bb
Stalled
Uint8_t
64 bits
Read
Uint8_t 2400000
Stalled
64 bits
Read
Uint8_t 2400000
Stalled
64 bits
1.000000
Uint8_t 2400000
Stalled
Addition
Uint8_t 2400000
Stalled
8 bits
Get Address
Uint8_t 2400000
Stalled
32 bits
Read
Uint8_t 2400000
Stalled
64 bits
Read
Uint8_t 2400000
Stalled
64 bits
1.000000
Stalled
Addition
Uint8_t 2400000
Stalled
8 bits
Write
Uint8_t 2400000
Stalled
64 bits
0.000000
Stalled
Write
Uint8_t 2400000
Stalled
64 bits
Local Scalar: bottom
Stalled
Uint8_t
8 bits
Read
Uint8_t 2400000
Stalled
8 bits
15.000000
Stalled
Comparison
Uint8_t 2400000
Equal
1 bits
Branch
Uint8_t 2400000
Stalled
0 bits
0.000000
Uint8_t 2400000
Stalled
Before
Uint8_t 2400000
Stalled
0 bits
Write
Uint8_t 2400000
Stalled
64 bits
0.000000
Uint8_t 2400000
Stalled
Write
Uint8_t 2400000
Stalled
64 bits
Local Scalar: n
Stalled
Uint8_t
64 bits
256.000000
Uint8_t 2400000
Stalled
Comparison
Uint8_t 2400000
Stalled
1 bits
Branch
Uint8_t 2400000
Stalled
0 bits
Read
Uint8_t 2400000
Stalled
64 bits
1.000000
Uint8_t 2400000
Stalled
Addition
Uint8_t 2400000
Stalled
64 bits
Write
Uint8_t 2400000
Stalled
64 bits
Read
Uint8_t 2400000
Stalled
64 bits
Read
Uint8_t 2400000
Stalled
64 bits
Get Address
Uint8_t 2400000
Stalled
32 bits