



CL3 Series

SPECIFICATIONS

	Imperial Units	Metric Units
Construction	SPC	
Size	7.21" x 48"	183mm x 1220mm
Overall Thickness	0.256"	6.5mm
Core Thickness	0.197"	5mm
Underlayment	0.06" IXPE	1.5mm IXPE
Wear Layer Thickness	20mil (0.02")	0.5mm
Edge Description	4-Sided Painted V-Bevel	
Gloss Level	4-6°	
Locking System	I4F	
Installation	Floating	
Installation Grade	Above, On, Below	
Plank per Carton	8	
Area per Carton	19.22 sq ft	1.786 sq m
Area per Pallet	1057.1 sq ft	98.207 sq m
Weight per Carton	41.89 lb	19 kg
Density (Core)	131.099 lb/ft ³	2100 kg/m ³
STC Rating	73	
IIC Rating	73	
Embossed In Register	Yes	
FloorScore Certified	Yes	
UL Certification	GreenGuard Gold	
Residential Warranty	30 Year Residential	
Commercial Warranty	10 Year Light Commercial	



COLOURS



COORDINATING TRIM



T-Mold

1-11/16"W x 94"L



Reducer

1-3/4"W x 94"L



Shoebase

3/4"W x 94"L



Flush Stairnose

2-3/4"W x 94"L



CL170 Series

SPECIFICATIONS

	Imperial Units	Metric Units
Construction	SPC	
Size	9" x 48"	228mm x 1220mm
Overall Thickness	0.276"	7mm
Core Thickness	0.197"	5mm
Underlayment	0.079" IXPE	2mm IXPE
Wear Layer Thickness	20mil (0.02")	0.5mm
Edge Description	4-Sided Painted V-Bevel	
Gloss Level	4-6°	
Locking System	I4F	
Installation	Floating	
Installation Grade	Above, On, Below	
Plank per Carton	8	
Area per Carton	24.17 sq ft	2.245 sq m
Area per Pallet	1160.16 sq ft	107.78 sq m
Weight per Carton	52.3 lb	23.72 kg
Density (Core)	131.099 lb/ft ³	2100 kg/m ³
STC Rating	73	
IIC Rating	73	
Embossed In Register	No	
FloorScore Certified	Yes	
Certification	CE, FloorScore	
Residential Warranty	30 Years	
Commercial Warranty	10 Years Light Commercial	



COORDINATING TRIM



T-Mold

1-11/16"W x 94"L



Reducer


1-3/4"W x 94"L




Flush Stairnose

2-3/4"W x 94"L

COLOURS

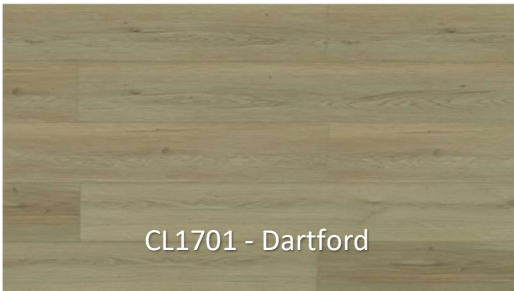

CL1701 - Dartford

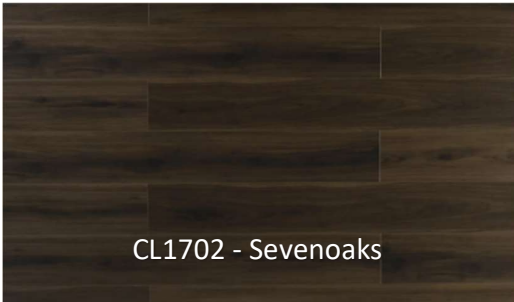


CL1702 - Sevenoaks




CL1703 - Chatham



CL1704 - Emberton

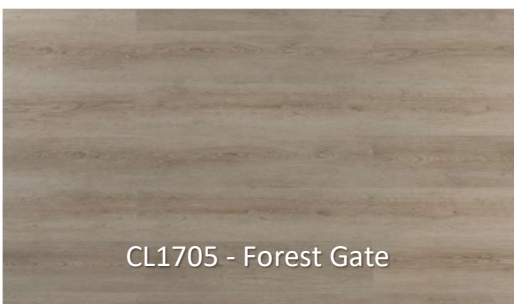


CL1705 - Forest Gate

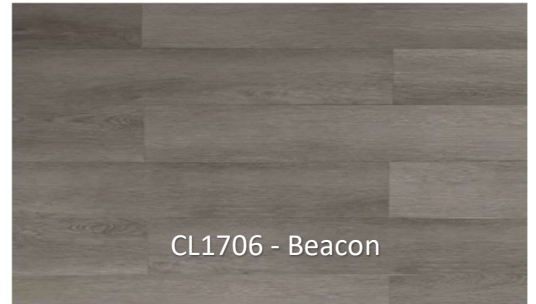


CL1706 - Beacon



CL1707 - Moraine Drift

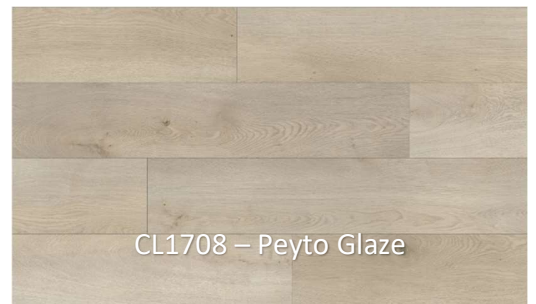

CL1708 - Peyto Glaze

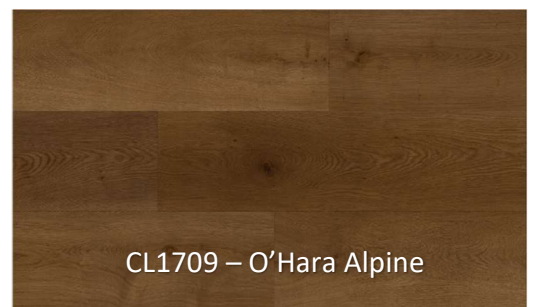

CL1709 - O'Hara Alpine



CL1710 - Morning Mist



CL173 Series

SPECIFICATIONS

	Imperial Units	Metric Units
Construction	SPC	
Size	7.21" x 48"	183mm x 1220mm
Overall Thickness	0.276"	7mm
Core Thickness	0.197"	5mm
Underlayment	0.079" IXPE	2mm IXPE
Wear Layer Thickness	20mil (0.02")	0.5mm
Edge Description	Micro Bevels	
Gloss Level	4-6°	
Locking System	I4F	
Installation	Floating	
Installation Grade	Above, On, Below	
Plank per Carton	8	
Area per Carton	19.23 sq ft	1.786 sq m
Area per Pallet	1057.65 sq ft	98.234 sq m
Weight per Carton	42 lb	19.05 kg
Density (Core)	131.099 lb/ft ³	2100 kg/m ³
STC Rating	73	
IIC Rating	73	
Embossed In Register	No	
FloorScore Certified	Yes	
Certifications	CE, FloorScore	
Residential Warranty	30 Years	
Commercial Warranty	10 Years Light Commercial	



COORDINATING TRIM



T-Mold

1-11/16"W x 94"L



Reducer


1-3/4"W x 94"L




Flush Stairnose

2-3/4"W x 94"L

COLOURS

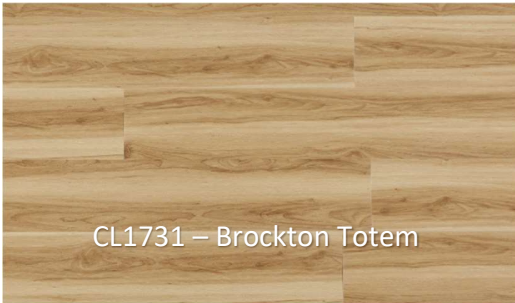


CL1731 – Brockton Totem

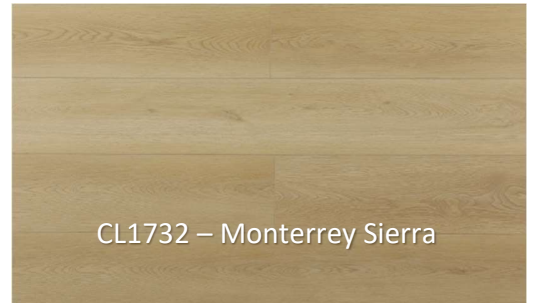


CL1732 – Monterrey Sierra




CL1733 – Kansas Heartland

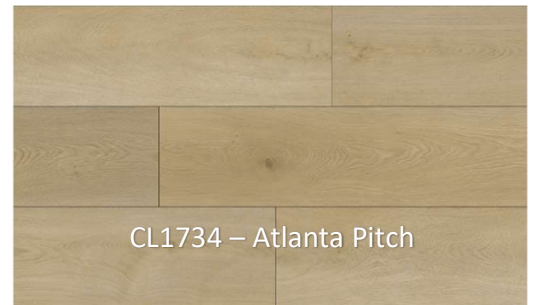

CL1734 – Atlanta Pitch

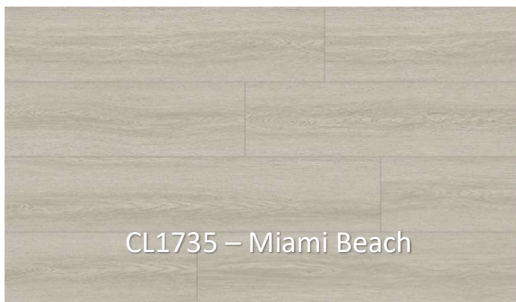

CL1735 – Miami Beach

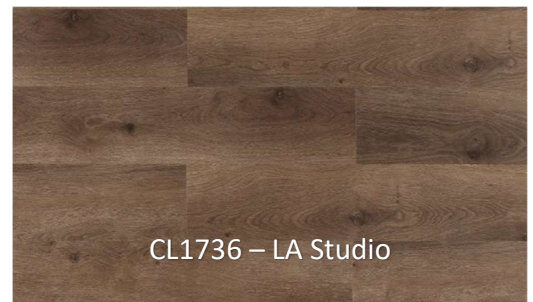

CL1736 – LA Studio



SPECIFICATIONS

	Imperial Units	Metric Units
Construction	SPC	
Size	9.1" x 48"	230mm x 1220mm
Overall Thickness	0.315"	8mm
Core Thickness	0.260"	6.5mm
Underlayment	0.06" IXPE	1.5mm IXPE
Wear Layer Thickness	20mil (0.02")	0.5mm
Edge Description	4-Sided Painted V-Bevel	
Gloss Level	7-8°	
Locking System	I4F	
Installation	Floating	
Installation Grade	Above, On, Below	
Plank per Carton	6	
Area per Carton	18.122 sq ft	1.684 sq m
Area per Pallet	869.86 sq ft	80.813 sq m
Weight per Carton	48.9 lb	22.181 kg
Density (Core)	131.099 lb/ft³	2100 kg/m³
STC Rating	73	
IIC Rating	73	
Embossed In Register	No	
FloorScore Certified	Yes	
QMS & EMS Certification	Yes	
Residential Warranty	30 Year Residential	
Commercial Warranty	15 Year Light Commercial	



COLOURS

