
PFT RITMO L FC-230V eco

Entry model for companies with a small budget, which don`t want to renaunce on quality

The perfect machine for beginners in the world of PFT mixing pumps. RITMO L eco offers maximum performance at a minimal price. Specially developed for the most common applications and with a sensational price.





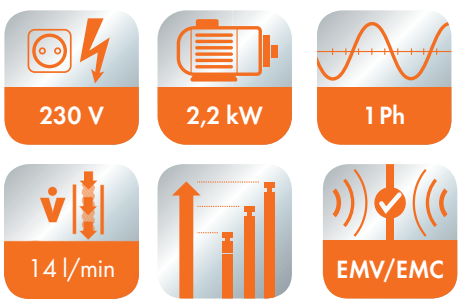

TECHNICAL DATA

Part no.	00 65 93 41
Working pressure	max. 20 bar
Conveying capacity	continuously adjustable up to 14 litres / min
Conveying distance	up to 20 m
Motor	230 V, 1 Ph, 50 Hz, 2.2 kW, 55 – 492 rpm
Connection cable	BLU 3-16 A | BLU 2-16 A – 25 m
Rotor/Stator	B 4–2
Spraying gun	smartline DN25 S10 200 Ewo
Air compressor	COMP R-80, 230 V, 1 Ph, 50 Hz, 0.35 kW, 80 l / min
Material outflow	DN25 male part
Material hose	RONDO DN25 – 10 m
Air hose	DN9 Ewo | Ewo – 16 m
Mixing tube	steel
Operation	Compressor: pressure control Water pump: 1/0
Hopper content	45 litres
Dimensions: L/W/H	872 / 600 / 1,430 mm
Filling height	930 mm
Weight	~ 103 kg

Please note:
Standard values depending on mortar quality, mortar composition, mortar consistency, pump version, pump condition, material hose diameter and delivery height. Ultimately, the respective guidelines of the material manufacturer are decisive.

PFT – ALWAYS AT YOUR SITE

ADVANTAGES AT A GLANCE











- 1 Suitable for bucket and bag material
- 2 Flow-optimized outlet
  - No bending: Low risk of tamper
  - No constriction: Constant material flow
- 2 Mortar pressure gauge included
- 3 Device for watering and cleaning the mortar hose
- 4 Material hopper for optimum material flow
- 4 Easy handling during initial operation, retrofitting, maintenance and cleaning
- 5 Water flow meter 75 - 750 l/h
- 5 Easy operation of the frequency converter (FC)
- 5 Compressor with pressure control
- Easy dismountable into three modules

  Module weights:
  - Motor with protection grille: 30 kg
  - Material hopper with pump unit: 25 kg
  - Chassis: 43 kg
  - Mixing shaft: 3 kg
- Transport is possible in any estate car
- Runs powerfully and reliably with luminous flux
- Cleaner coupling DN25 male part | Geka
  For cleaning the mortar hose

FIELDS OF APPLICATION

- Interior plaster
- Finishing plaster
- Floor levelling compound
- Fine coat
- Adhesive and reinforcement mortar

ACCESSORIES	PART NO.
Extension cable 3 x 2.5 mm², BLU 2-16 A – 25 m	20 42 34 20
Extension hopper - 75 litres	00 08 97 93
Bag squeezer for RITMO M/ L	00 09 86 56
Mixing shaft BIONIK RITMO (RAL 9002)	00 57 80 50
Stator B 4–2 wf	00 00 84 62
Rotor B 4–2	00 24 58 10

The PFT Service guarantee

Customer-friendliness, technical expertise a
service-orientation. That's what the PFT br
with its sales and service centers worldwi
stands for also in the coming decades.

Click. Discover. Experience.

www.pft.net
www.youtube.com/knaufpften

Download now! APP: PFT – Plastering Technology

Knauf PFT GmbH & Co. KG
Einersheimer Str. 53 · DE-97346 Iphofen

Technische Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft.net www.pft.net

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photomechani cal reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

PFT RITMO L FC-230V eco – EN/04.19/PFT

Complexe Futuris Logistic, Lotissement Ennouala, Lot N°2, Depot A3 Boulevard Moulay Ismail, Casablanca
Tel.: (212) 5 22 34 44 59 - (212) 5 22 34 44 62 Email: contact@pladis.ma - Site-web : www.pladis.ma