GRIDS AND SUSPENSIONS


USG ME DONN® BRAND DXH® 38 T24 SUSPENSION SYSTEM




VISIT USGME.COM TO ORDER SAMPLES

GRID COLORS


PROFILE




EDGE DETAIL



SQUARE EDGE - SQ



SHADOWLINE TAPERED - SLT



CONCEALED EDGE
(BESK, S-BESK, D-BESK)

FEATURES AND BENEFITS

- DONN® Brand DXH® 38 T24 Heavy Duty features a body and cap made of G30 hot-dip galvanized steel as per EN 10346/ASTM A653 with pre-painted 24mm width capping to ensure that the cap remains clean and rust-free.
- Four-step coating process that outperforms in paint adhesion and corrosion resistance, as proven by industry-standard salt spray tests conducted by an Independent laboratory.
- Safe, fast and simple to install & easily accessible.
- Maximum economy and design simplicity.
- Cross-tees with override-ends resist twisting and give professionally finished look with no exposed steel edges.
- Patented QUICK-RELEASE™ clip design: demountable without tools.
- Compatible with Square, SLT, and Concealed ceiling tile edges.
- Audible Click means you know when tees are connected.
- Exceeds load compliance specifications as per ASTM C 635.
- Available in metric and imperial sizes.

APPLICATIONS

- Interior general-use areas

USG ME
INNOVATIVE SOLUTIONS. EVERYTIME.


PLADIS - Complexe Futuris Logistic Lotissement Ennouala Lot N°2 Dépôt A3 Boulevard My Ismaïl- Casablanca , Tel: (212) 5 22 34 44 59 // (212) 5 22 34 44 62
Zi Gzenaya 341- Tanger , Tel: (+212) 5 31 43 65 10 Email: contact@pladis.ma - Site Web : www.pladis.ma

USG ME DONN® BRAND DXH® 38 T24 SUSPENSION SYSTEM


EN 13964 : 2014 + A1 : 2007


PRODUCT INFORMATION

Description	Item Reference		Profile Height	Body Thickness	Component Length
	Metric	Imperial			
Main Runner	801DX3600H38	801DX3660H38	38MM	0.30MM	3600/3660MM
Long Cross Tee	803DX1200H38	803DX1220H38	38MM	0.30MM	1200/1220MM
Short Cross Tee	804DX600H38	804DX610H38	38MM	0.30MM	600/610MM
Wall Angle	802MT3600		22MM	0.50MM	3600MM
Wall Angle Shadowline	802MS3600 - 802MS164L		19/9MM - 20/20MM	0.50MM	3600MM
U-Trim	UT123525 - UT124825 - UT125325		25.4/12.7MM	0.50MM	3000MM





Main Runner 801DX3600H38







Long Cross Tee 803DX1200H38







Short Cross Tee 804DX600H38






Wall Angle

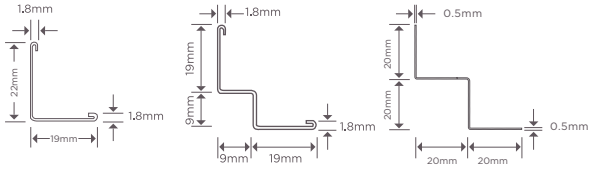




U-Trim



SUSPENSION OPTIONS

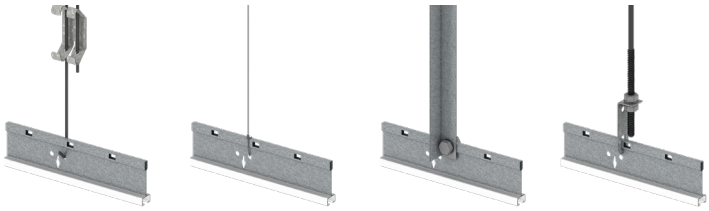

Adjustable Hanger | Suspension Wire | Angle Section | Hanging Bracket

MAXIMUM ALLOWED OF TILES WEIGHT

KG PER M²*

DXH 38 - T24 - Minimum Load - Carrying Capabilities of Main Runners

Hanger distance (mm)	Applied Load (N)	Equivalent Uniform Load (N/M)	Allowable Midspan Deflection (mm)	Deflection Limit
900	66.43	217.8	0.339	L/360
1200	37.36	122.5	0.339	L/360
1500	29.89	98.0	0.339	L/360

** The load per m² must be distributed uniformly (no point loads) over the ceiling area. After loading, the deflection of any grid component will remain within the maximum deflection per span.*

Please consult USG ME for layouts, load or hanger distance.

Notice:
As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to **usgme.com** for the updated products information document.

©2022 Factory of USG Middle East LTD. Co. All rights reserved.

USG ME
INNOVATIVE SOLUTIONS. EVERYTIME.