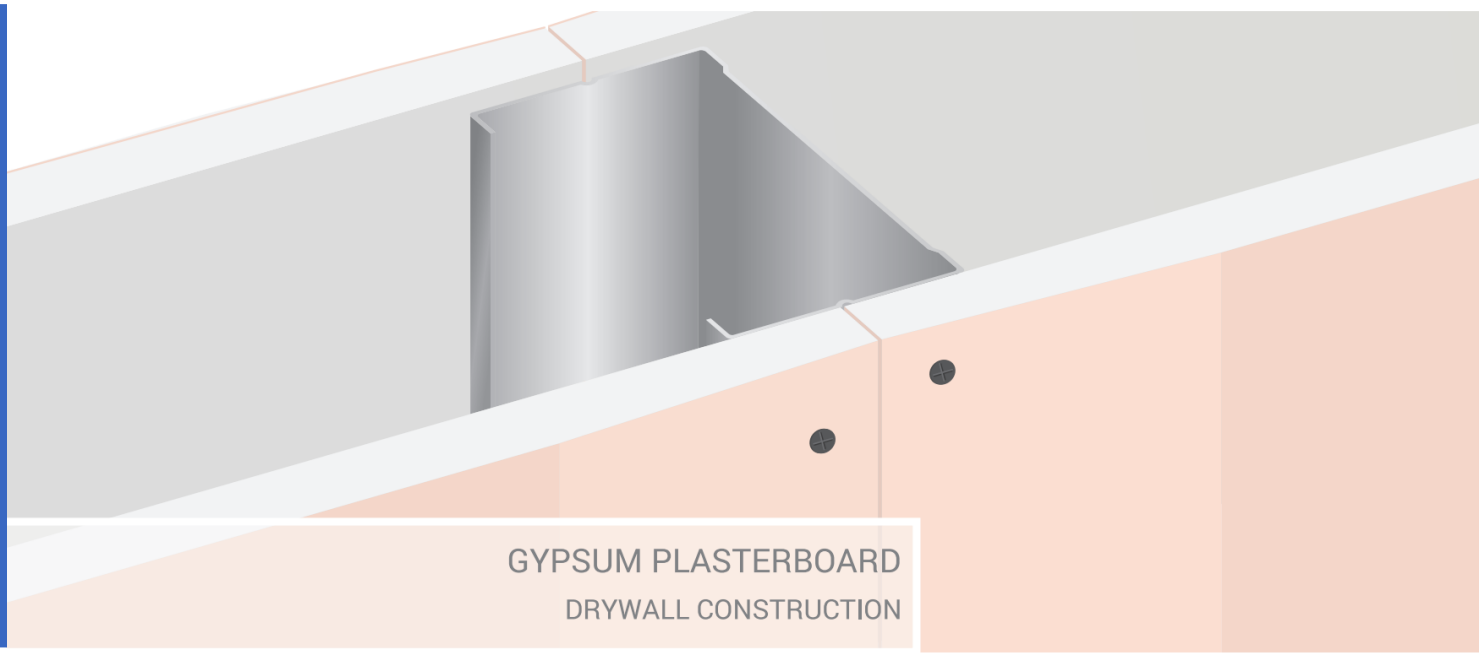


GYPSUM PLASTERBOARD

DRYWALL CONSTRUCTION

FIRE

Application

The GYPFOR FIRE plasterboard is designed for use in interior wall and ceiling applications. Should not be used in applications where temperatures exceed 52 ºC for extended periods, or in areas with extreme humidity.

Board with enhanced level of fire resistance for applications with special fire protection requirements. Suitable for:

- Suspended Ceilings

- Partition walls

- Existing wall linings

Physical characteristics

Board type
EN 520 F

Core
Non-combustible, dimensionally stable, inert gypsum

Paper
100% recycled; pink color

Longitudinal Edge
Tapered edge (TE)

Transversal Edge
Square edge (TE)

Label colour
Black

Produced with special additives for improved fire resistance. Gypsum board primer should be applied before painting or adding any textural material.

+351 269 098 278 @ info@gypfor.com gypfor.com

Technical specifications

Type		FIRE	
		F	EN 520
Reaction to fire		A2-s1,d0 (B)	EN 520
Thermal conductivity	*W/(m °C)*	0.25	EN ISO 10456
Density	*kg/m³*	≥ 800	
Dimensions			
Thickness	*mm*	12.5, 15	
Width	*mm*	1200	
Lengths	*mm*	Several	
Approximate weight			
Board thickness 12,5 mm	*kg/m²*	10.20	
Board thickness 15 mm	*kg/m²*	12.20	


Breaking loads				EN 520
Thickness		12.5	15	
Longitudinal	*N*	≥550	≥650	
Transverse	*N*	≥210	≥250	

Dimensional tolerances


Thickness:	±0,5 mm
Width:	+0/-4 mm
Length:	+0/-5 mm

Application


Wall Linings



Ceilings




Partitions




Edge

Tapered Edge – TE



This plate has a non-combustible core and additives that improve its mechanical resistance to fire, making it suitable systems with special fire protection requirements.

Sizes *(mm)*

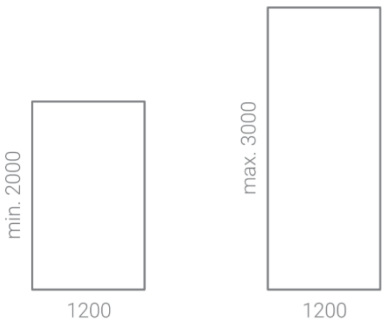

To maintain GYPFOR FIRE performance integrity, the drywall plasterboard should be protected from exposure to adverse conditions during storage and construction.

CE EUROGYPSUM

PLADIS - Complexe Futuris Logistic Lotissement Ennouala Lot N°2 Dépôt A3 Boulevard My Ismaïl- Casablanca
Tel: (212) 5 22 34 44 59 // (212) 5 22 34 44 62
Zi Gzenaya 341- Tanger , Tel: (+212) 5 31 43 65 10 Email: contact@pladis.ma Site Web : www.pladis.ma