
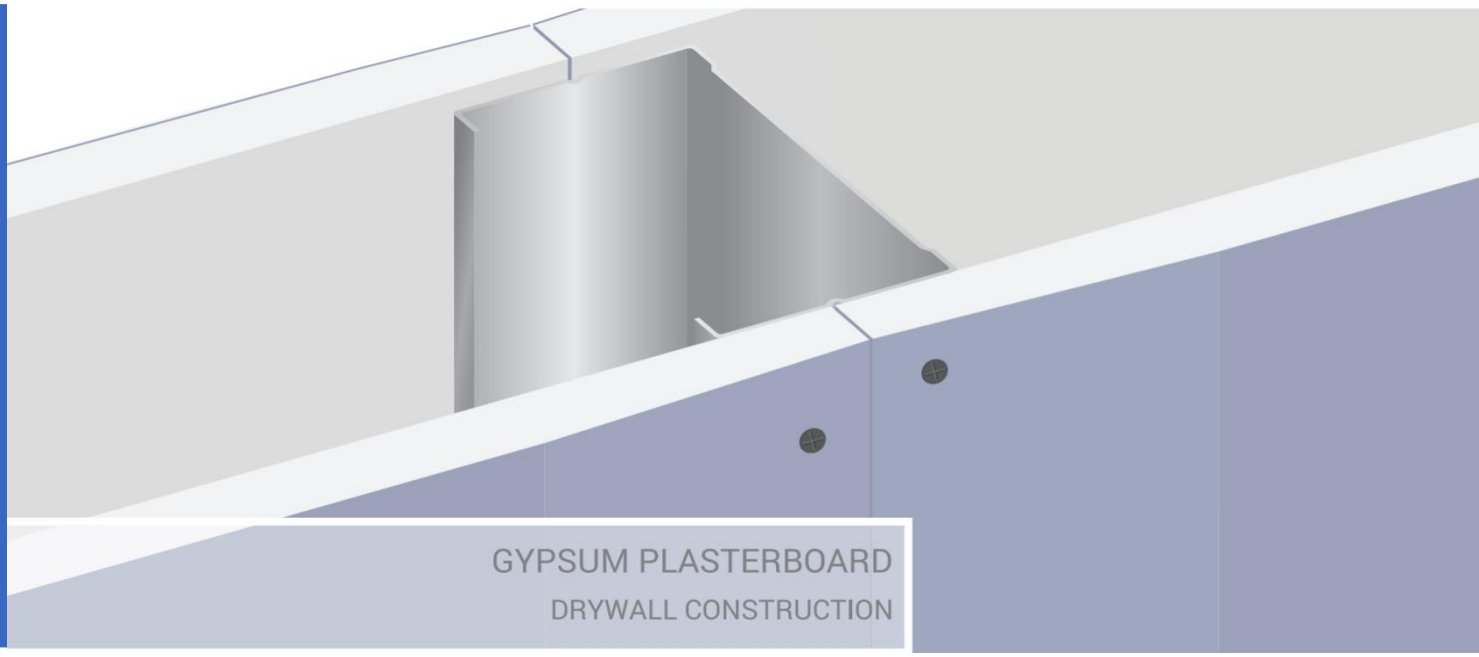


GYPSUM PLASTERBOARD

DRYWALL CONSTRUCTION

ACOUSTIC

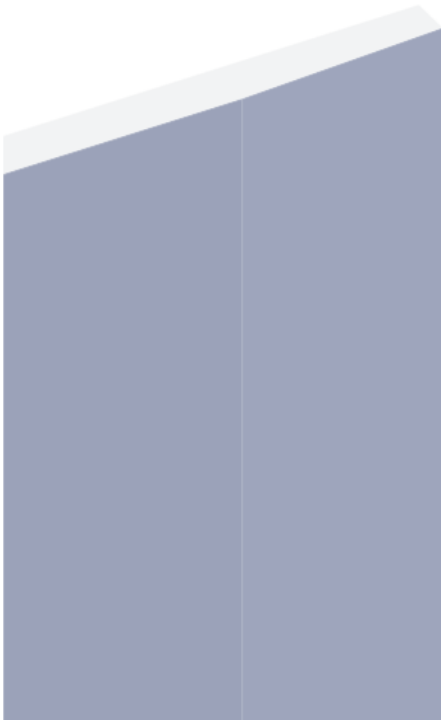

Application

The GYPFOR ACOUSTIC plasterboard is designed for use in interior wall and ceiling applications. Should not be used in applications where temperatures exceed 52 ºC for extended periods, or in areas with extreme humidity.

Enhanced quality board designed for application in systems with sound insulation requirements. Suitable for:

- Suspended Ceilings

- Partition walls

- Existing wall linings

Physical characteristics

Board type
EN 520:2004+A1:2009 DI

Core
Non-combustible, dimensionally stable, inert gypsum

Paper
100% recycled, colour blue

Longitudinal Edge
Tapered edge (TE)

Transversal Edge
Square edge (TE)

Label colour
Black

Board with enhanced sound insulation. Gypsum board primer should be applied before painting or adding any textural material.

+351 269 098 278 @ info@gypfor.com gypfor.com

GYPSUM PLASTERBOARD
DRYWALL CONSTRUCTION

ACOUSTIC

Technical specifications

TYPE		ACOUSTIC	
		DI	EN 520
Reaction to fire		A2-s1,d0 (B)	EN 520
Thermal conductivity	*W/(m °C)*	0.25	EN ISO 10456
Density	*kg/m³*	≥ 800	
Dimensions			
Thickness	*mm*	12.5, 15	
Width	*mm*	1200	
Length	*mm*	2400, 2500, 3000	
Approximate weight			
Board thickness 12,5 mm	*kg/m²*	10.50	
Board thickness 15 mm	*kg/m²*	12.30	


Breaking loads				EN 520
Thickness		12.5	15	
Longitudinal	*N*	≥550	≥650	
Transversal	*N*	≥210	≥250	

Dimensional tolerances


Thickness:	±0,5 mm
Width:	+0/-4 mm
Length:	+0/-5 mm

Application


Wall linings



Ceilings




Partitions




Edge

Borde Afinado - BA



This board is not suitable for direct contact with water or for permanent high humidity areas. GYPFOR ACOUSTIC has some inherent fire-resistance characteristics, however it should not be used to provide the maximum levels of fire resistance that some applications require.

Sizes *(mm)*

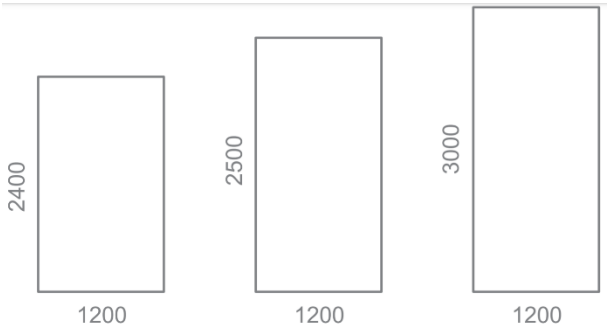

To maintain GYPFOR ACOUSTIC performance integrity, the drywall plasterboard should be protected from exposure to adverse conditions during storage and construction.

CE EUROGYPSUM