SOUND BA C10-8

GYPSUM PLASTERBOARD
DRYWALL CONSTRUCTION

Tech Specs


Type		SOUND BA C10-8	
		DI	EN 520
Reaction to fire		A2-s1,d0 (B)	EN 520
Termal Conductivity λ	W/(m.ºC)	0.25	EN ISO 10456
Density	kg/m^3	≥ 800	
Dimensions			
Thickness	mm	12.5	
width	mm	1200	
Lengths	mm	2400	
Nominal Weight.			
Board Thick. 12.5 mm	kg/m^2	9.4	
Breaking Loads			EN 520
Thickness		12.5 mm	
Longitudinal		≥550	
Transversal		≥210	
Acoustic Viel		white	
Perforated area		16%	

Dimensional tolerances


Thickness	+- 0.5 mm
With	+0/-4 mm
Length	+0/-5 mm

Application


wall linings

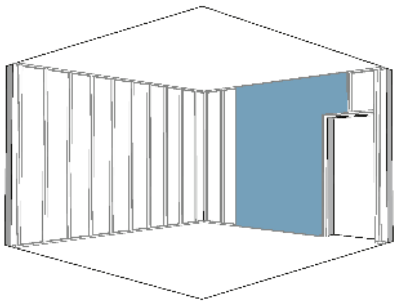


Ceilings

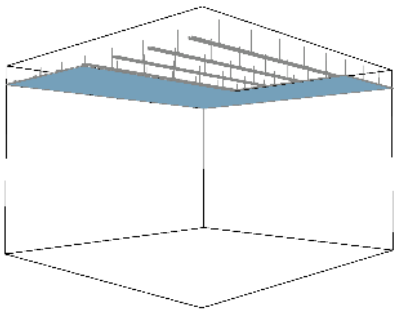

Partitions

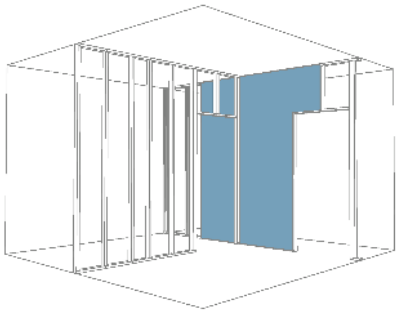

Perforated padron



Dimensions (mm)



Tapered Edge - BA



CE

DI - EN 520

EUROGYPSUM

To maintain GYPFOR SOUND BA C10-8 performance integrity, the drywall plasterboard should be protected from exposure to adverse conditions during storage and construction.

PLADIS - Complexe Futuris Logistic Lotissement Ennouala Lot N°2 Dépôt A3 Boulevard My Ismaïl- Casablanca
Tel: (212) 5 22 34 44 59 // (212) 5 22 34 44 62
Zi Gzenaya 341- Tanger , Tel: (+212) 5 31 43 65 10 Email: contact@pladis.ma Site Web : www.pladis.ma