
SKYROCK®


SOUNDBLOCK - R8-15-20


Perforated Gypsum Tile

VISIT USGME.COM TO ORDER SAMPLES

PATTERN



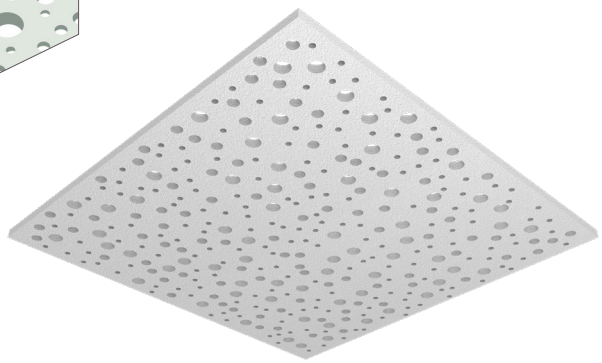

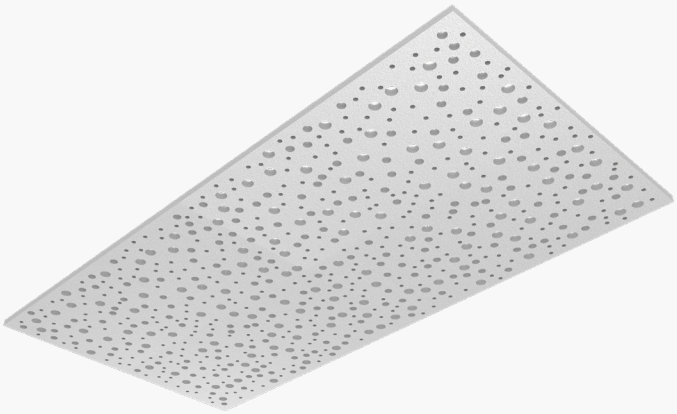


FEATURES & BENEFITS

- Irregular round perforation Gypsum Ceiling tiles with acoustic back fleece for high acoustic performance.
- Available in laminated and painted surface finish options.
- Various edges for modern and aesthetic look.
- Ultra-high humidity resistant; sag resistance ensures durability in standard or extreme environmental conditions.
- Scrub resistant. Dirt marks are easy to remove.
- Durable, scuff, and scratch resistant for longer life.
- Suitable for areas with high humidity.
- Economical and easy to trim and install.
- Demountable and designed to be installed on the DONN® Brand acoustical ceiling suspensions.


APPLICATION

- Schools
- Commercial retails
- Department stores
- Hotels
- Malls & residential

TILE AND EDGE DETAILS

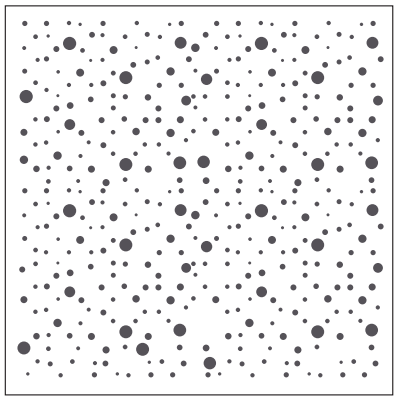

Open Area 16.4%

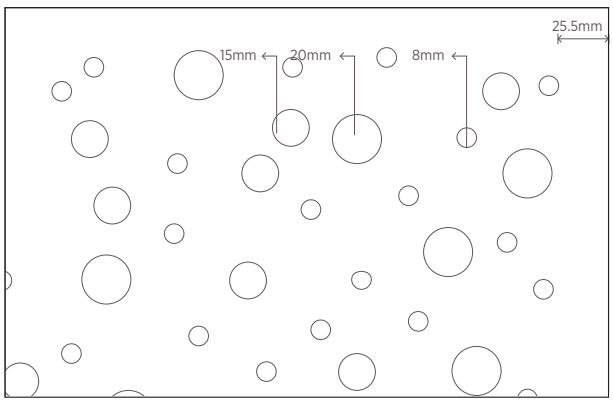

SKYROCK®

SOUNDBLOCK - R8-15-20





PRODUCT CERTIFIED FOR ENVIRONMENTAL PRODUCT DECLARATION

CEILING ATTENUATION CLASS

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
			NRC	CAC					>	$
SQ	GT-PS6609-R8-15-20 LG-S6609-R8-15-20	600*600*9.5 600*600*9.5	0.70		88%			7%	Low	$$$
	GT-PS662-R8-15-20 GT-PS622-R8-15-20	600*600*12.5 600*1200*12.5	0.70		88%			7%	Low	$$$$
	LG-S662-R8-15-20 LG-S622-R8-15-20	600*600*12.5 600*1200*12.5	0.70		84%			7%	Low	$$$$
SL	GT-PSR662-R8-15-20 GT-PSR622-R8-15-20	600*600*12.5 600*1200*12.5	0.70		88%			7%	Low	$$$$
	LG-SR662-R8-15-20 LG-SR622-R8-15-20	600*600*12.5 600*1200*12.5	0.70		84%			7%	Low	$$$$
FL	GT-PSRF662-R8-15-20 GT-PSRF622-R8-15-20	600*600*12.5 600*1200*12.5	0.70		88%			7%	Low	$$$$
	LG-SRF662-R8-15-20 LG-SRF622-R8-15-20	600*600*12.5 600*1200*12.5	0.70		84%			7%	Low	$$$$

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DX/DXL SL Edge	DXT FL Edge	DXF FL Edge
			

SPECIFICATION DETAILS

Soundblock R8-15-20 Ceiling Tile meets specifications in accordance with ASTM E1264.

Materials Classification
Type: XX,
Pattern: B, C

Substrate and Surface Finish
Laminated: Gypsum ceiling panel laminated with vinyl-faced
Painted: Gypsum ceiling panel finished with factory-applied water-based paint

Thickness
9.5mm, 12.5mm

Size
600 x 600mm, 600 x 1200mm

Edge Detail Trim
Square, Reveal [SL, FL]

Weight
9.5mm [4.95 kg/m^2], 12.5mm [6.51 kg/m^2]

Open Area
600 x 600mm: 16.4%,
600 x 1200mm: 16.4%

Noise Reduction Coefficient [NRC]
up to 0.70*

Mold Prevention
Inherent to Mold/Mildew growth panels are available upon request

Humidity Resistance
Maximum 95% RH / 40°C

Light Reflectance Coefficient [LR]
Laminated: 0.84
Painted: 0.88

Color
Laminated: White similar to RAL 9003
Painted: Matt White similar to RAL 9016

Surface Burning Characteristics as per ASTM E84
Laminated: Class A
Painted: Class A

Thermal Resistance
12.5mm [R 0.45]

Washability / Scrubbability as per ASTM D4828 & D2486
Laminated: Exceeds 1000 Wash/Scrub Cycles without surface break or the extent of abrasion

Formaldehyde Classification
Class E1 as per EN717-1

** Using factory applied acoustical backer. Higher acoustic value can be achieved with additional Fiber glass/Stone wool backer panel*

PLADIS - Complexe Futuris Logistic Lotissement Ennouala Lot N°2 Dépôt A3 Boulevard My Ismaïl- Casablanca
Tel: (212) 5 22 34 44 59 // (212) 5 22 34 44 62
Zi Gzenaya 341- Tanger , Tel: (+212) 5 31 43 65 10 Email: contact@pladis.ma Site Web : www.pladis.ma

Notice: As we are involved in constant products development; this document information is subject to change without prior notice.
Please always refer to **usgme.com** for the updated products information document.
©2023 **Factory of USG Middle East LTD. Co.** All rights reserved.