
CEILINGS

FAVIA ACOUSTIC



VISIT USGME.COM TO ORDER SAMPLES

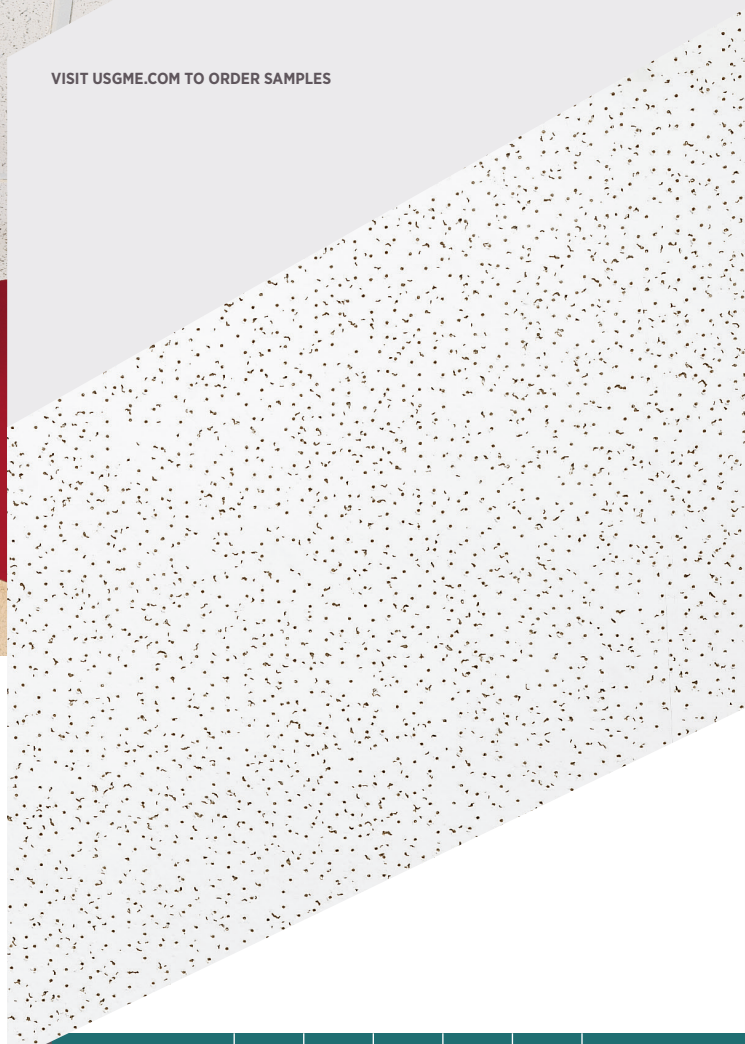

FEATURES & BENEFITS

- Micro-fissured non-directional pattern for a cleaner, whiter appearance.
- Elegant light-textured panels with high light reflectance.
- Mid-range sound absorption and sound attenuation which makes it ideal for schools, corridors, and general commercial stores.
- Meets the emission test criteria as low emitting per standards established by the Collaborative for High-Performance Schools (CHPS) and following ASTM D5116 testing method.

APPLICATIONS

- Education
- Corridors and hallways
- Grocery stores
- Administration offices
- Rest Area
- Warehouse

Absorption Coefficient

Frequency, Hz	125	250	500	1000	2000	4000	NRC*
16mm HNRC	0.30	**0.35**	**0.60**	**0.80**	**0.90**	0.85	**0.65**
19mm	0.35	**0.35**	**0.45**	**0.70**	**0.75**	0.65	**0.55**

**Calculated to ASTM C 423-01*

USG ME
INNOVATIVE SOLUTIONS. EVERYTIME.

FAVIA ACOUSTIC

EN 13964 : 2014 + A1 : 2007

PRODUCT CERTIFIED FOR LOW VOC EMISSIONS

HIGH SOUND ABSORPTION





CEILING ATTENUATION CLASS

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
SQ	FAS666 FAS226	600*600*16 610*610*16	0.65	35	85%			25%	Low	$$$
	FAS669 FAS229	600*600*19 610*610*19	0.55	37	85%			25%	Low	$$
SLT	FASR666 FASR226	600*600*16 610*610*16	0.65	35	85%			25%	Low	$$$
	FASR669 FASR229	600*600*19 610*610*19	0.55	37	85%			25%	Low	$$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXLT-FLB
			

SPECIFICATION DETAILS

Favia Acoustic Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: III,
Form: 2,
Pattern: C, D, E

Substrate and Surface Finish
Mineral fiber substrate finished with factory-applied water-based paint

Thickness
16mm, 19mm

Size
600 x 600mm, 610 x 610mm

Edge Detail Trim
Square, Reveal [SLT]

Weight
16mm [3.6 kg/m², Regular/ ClimaPlus™]
19mm [4.5 kg/m², Regular/ ClimaPlus™]

Noise Reduction Coefficient [NRC]
[0.55] [0.65]

Ceiling Attenuation Class [CAC]
[35 - 37 dB]

Mold Prevention Application as per ASTM D3273
Application available upon request per ASTM D3273-1, Rate 10 per D3274

Humidity Resistance
Maximum 90% RH / 40°C

Light Reflectance Coefficient [LR]
0.85

Color
White similar to RAL 9016

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Thermal Conductivity
λ = 0.057 W/m°K

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

VOC Class
Greenguard Gold

Formaldehyde Classification
Class E1 as per EN717-1

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 | IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

Notice:
As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to **usgme.com** for the updated products information document.

©2022 Factory of USG Middle East LTD. Co.
All rights reserved.

USG ME
INNOVATIVE SOLUTIONS. EVERYTIME.

PLADIS - Complexe Futuris Logistic Lotissement Ennouala Lot N°2 Dépôt A3 Boulevard My Ismaïl- Casablanca
Tel: (212) 5 22 34 44 59 // (212) 5 22 34 44 62
Zi Gzenaya 341- Tanger , Tel: (+212) 5 31 43 65 10 Email: contact@pladis.ma Site Web : www.pladis.ma