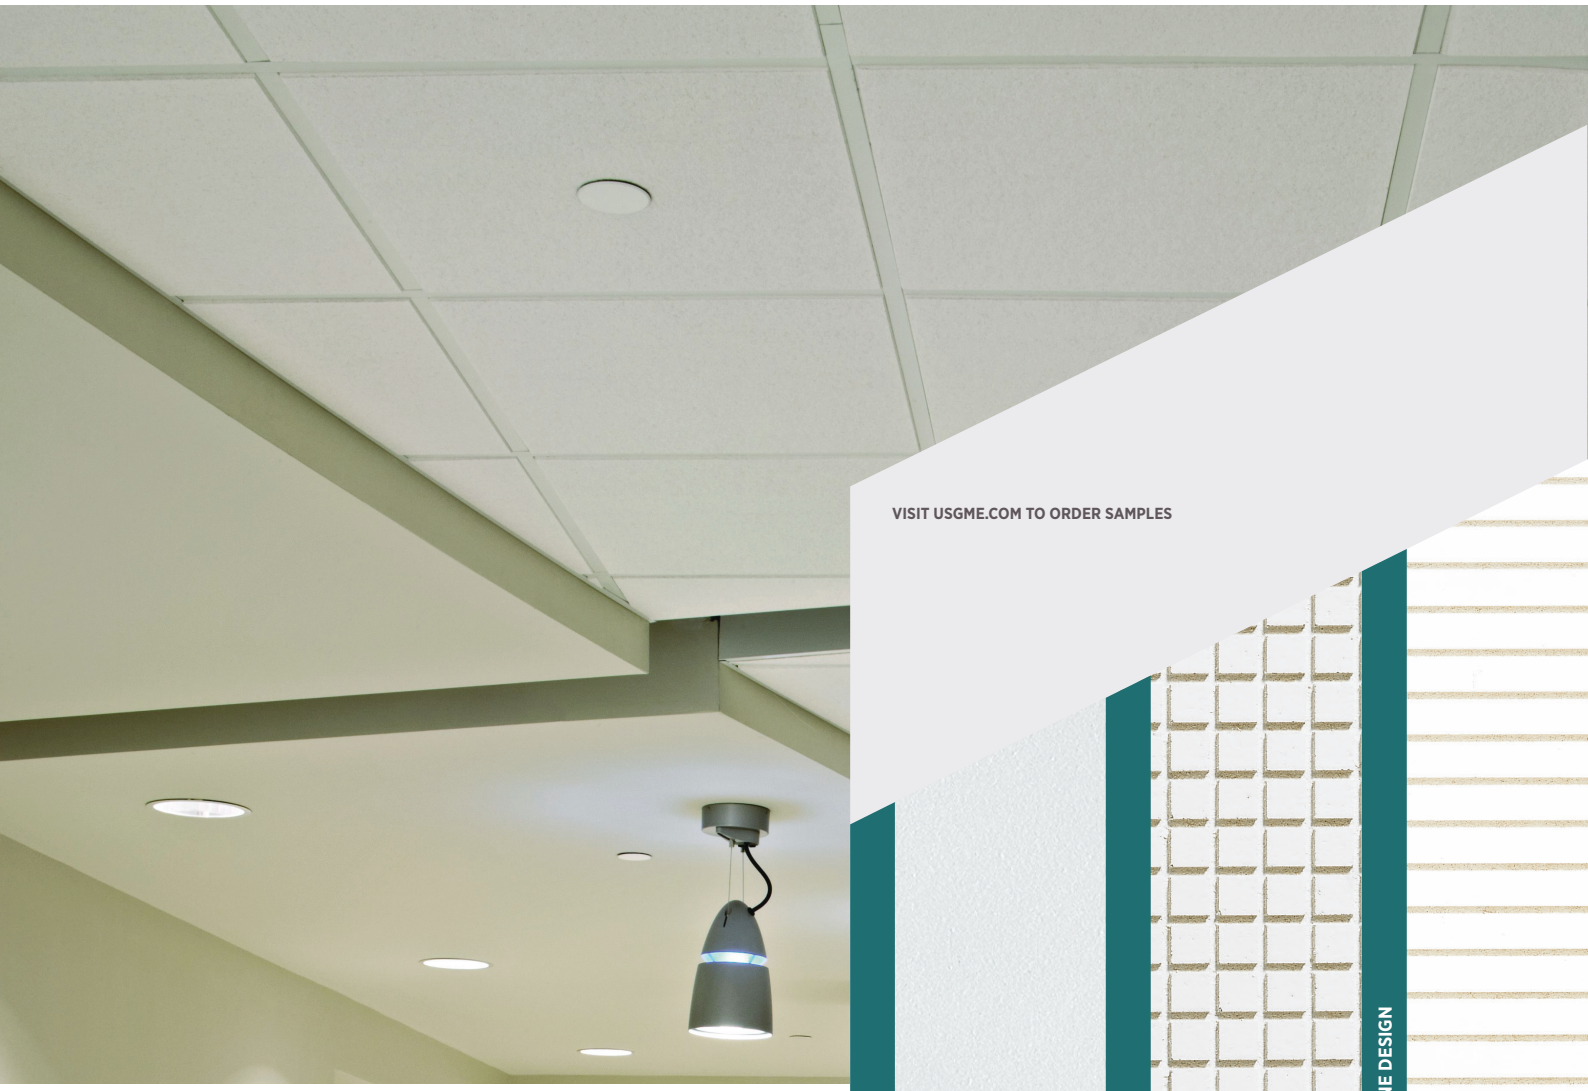
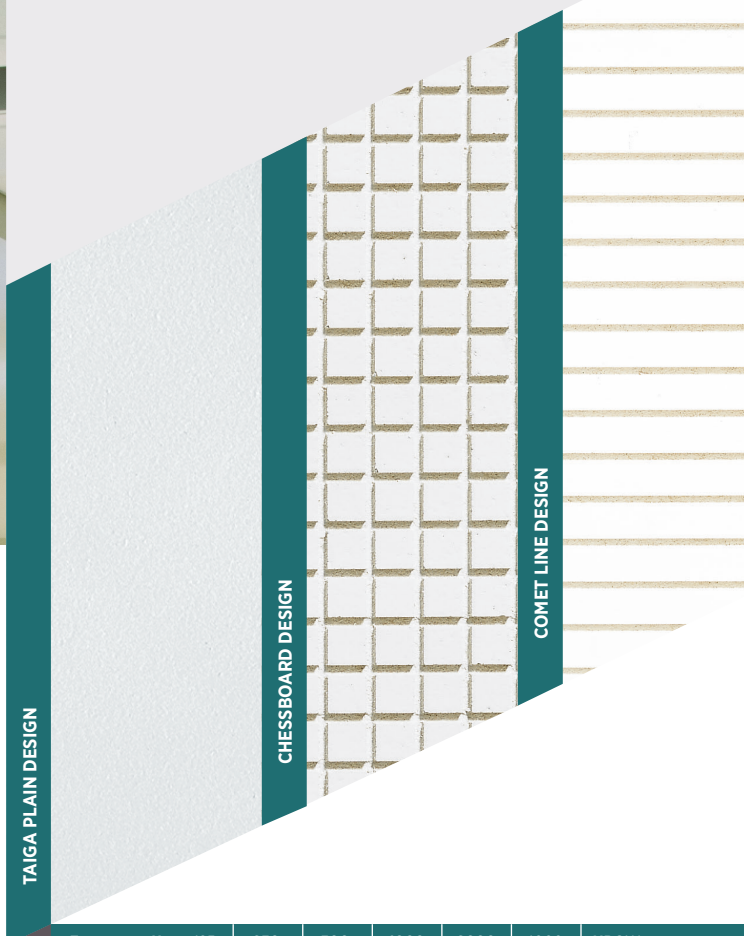
TAIGA



VISIT USGME.COM TO ORDER SAMPLES



Absorption Coefficient	Frequency, Hz	125	250	500	1000	2000	4000	NRC***
	15mm	0.35	**0.25**	**0.10**	**0.15**	**0.20**	0.45	**0.15**
	19mm*	0.30	**0.25**	**0.25**	**0.30**	**0.40**	0.60	**0.30**
	19mm**	0.25	**0.25**	**0.25**	**0.30**	**0.35**	0.50	**0.30**

** Chessboard Design*
*** Comet Line Design*
****Calculated to ASTM C 423-01*

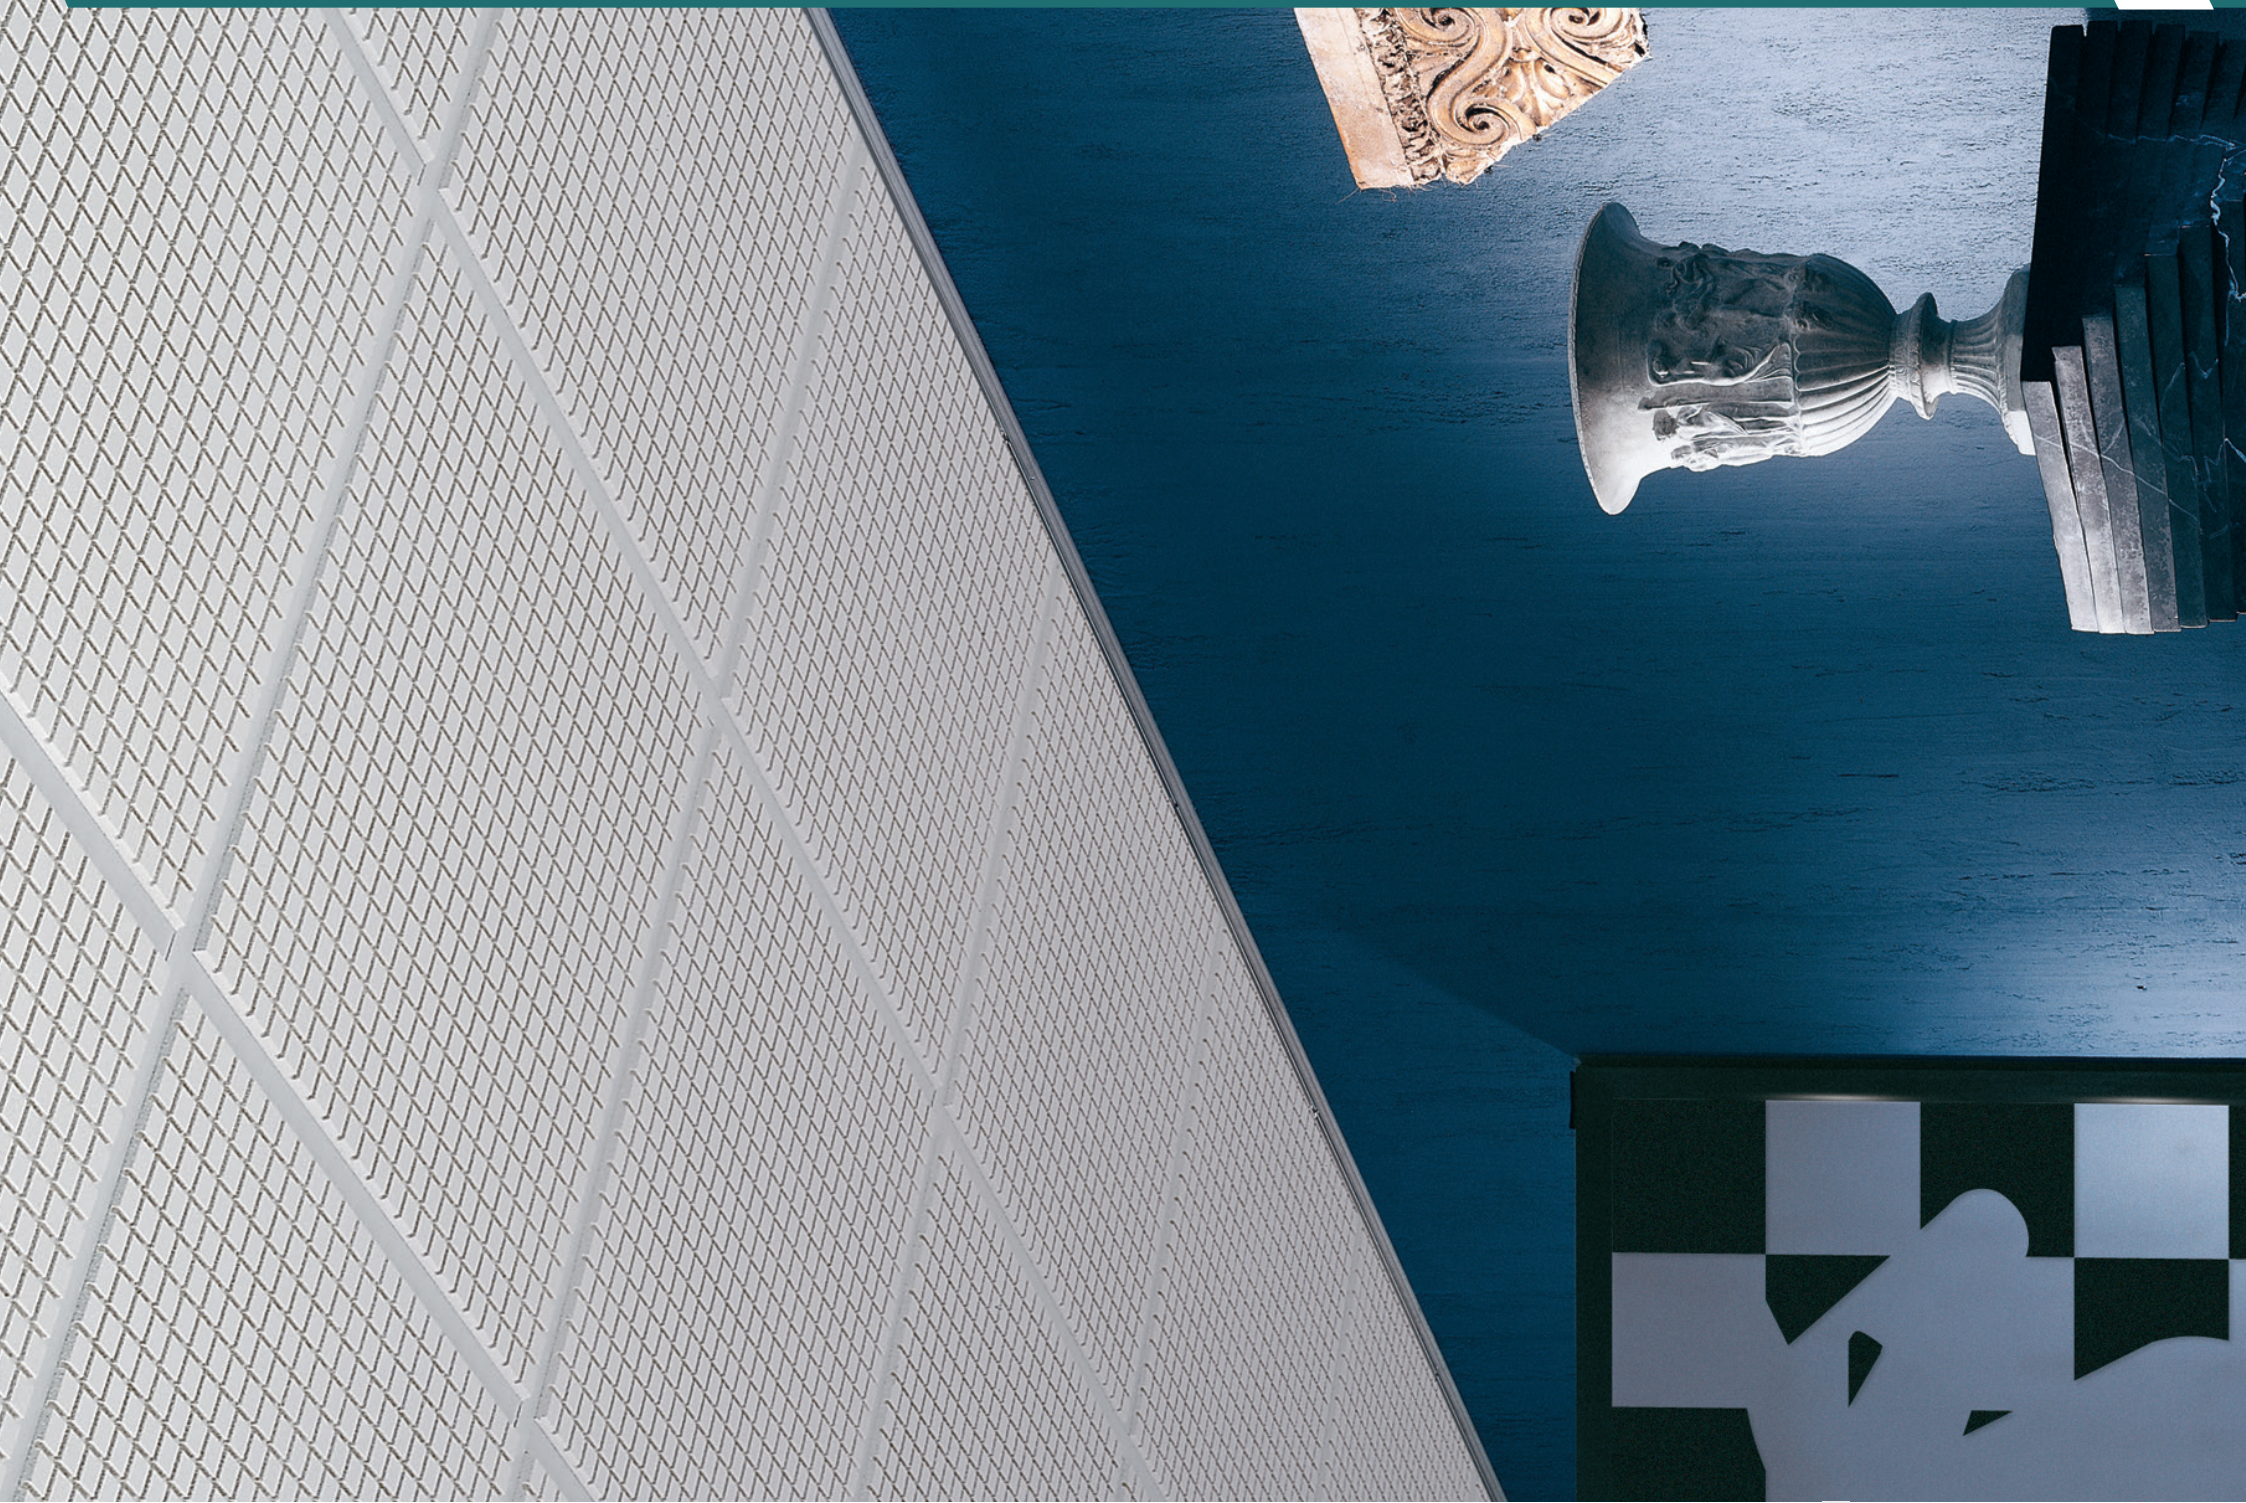
FEATURES & BENEFITS

- Taiga is available in three different surface designs: Plain, Chessboard, and Comet Line.
- Taiga panels were developed to meet today's trend for cleaner finishes with high light reflectance at 86%; improves day lighting which results in energy cost savings and increased comfort level.
- Enhanced surface durability makes Taiga more resistant to normal dirt and wear and tear, enhancing the product's lifespan.
- Low sound absorption, ideal where increased room reverberation is desired.
- High humidity resistant in ClimaPlus™, suitable for applications with intermittent heating and cooling.
- Available in Pedestal edge for 19mm thickness.

APPLICATIONS

- Showrooms and lounges
- Shops
- Supermarkets and departments stores
- Luxury retail stores
- General offices
- Municipal buildings
- Warehouses

USG ME
INNOVATIVE SOLUTIONS. EVERYTIME.



TAIGA

EN 13964 : 2014 + A1 : 2007

PRODUCT CERTIFIED FOR LOW VOC EMISSIONS

CEILING ATTENUATION CLASS

TABLE OF PERFORMANCE

Edge Detail	Item	Size (mm)	NRC	CAC	Light Reflectance	Anti-Mold & Mildew/ Sag Resistance	Fire Rating	Recycled Content	VOC Emission	Cost
			NRC	CAC					<	$
SQ	TS665 TS225	600*600*15 610*610*15	0.15	33	86%			25%	Low	$$
	TS669 TS229	600*600*19 610*610*19	0.15	37	86%			25%	Low	$$$
SLT	TSR665 TSR225	600*600*15 610*610*15	0.15	33	86%			25%	Low	$$
	TSR669 TSR229	600*600*19 610*610*19	0.15	37	86%			25%	Low	$$$
	TSRCHS669 TSRCHS229	600*600*19 610*610*19	0.30	35	83%			25%	Low	$$$
	TSRC669 TSRC229	600*600*19 610*610*19	0.30	35	83%			32%	Low	$$$
FLB	TSRF665 TSRF225	600*600*15 610*610*15	0.15	33	86%			25%	Low	$$$
PEDESTAL	DP1TSRI669 DP1TSRI229	600*600*19 610*610*19	0.15	37	86%			25%	Low	$$$
	DP4TSRI669 DP4TSRI229	600*600*19 610*610*19	0.15	37	86%			25%	Low	$$$
	CHSR669 CHSR229	600*600*19 610*610*19	0.30	35	86%			25%	Low	$$$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health (CDPH) Standard Method V1.2-2017 using a Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2. UL. Tests are available on usgme.com and at spot.ul.com









TAIGA

EN 13964 : 2014 + A1 : 2007

PRODUCT CERTIFIED FOR LOW VOC EMISSIONS

CEILING ATTENUATION CLASS

GRID PROFILE OPTIONS

DX/DXL SQ Edge	DXT SQ Edge	DX/DXL SLT Edge	DXF FLB Edge	DXT FLB Edge	DXT PEDESTAL
					

SPECIFICATION DETAILS

Taiga Acoustical Ceiling meets specifications in accordance with ASTM E1264 and EN13964.

Materials Classification
Type: III,
Form: 2,
Pattern: G, K

Substrate and Surface Finish
Mineral fiber substrate finished with factory-applied water-based paint

Thickness
15mm, 19mm

Size
600 x 600mm, 610 x 610mm

Edge Detail Trim
Square,
Reveal [SLT, FLB, Pedestal]

Weight
15mm [3.6 kg/m², Regular/ ClimaPlus™]
19mm [4.5 kg/m², Regular/ ClimaPlus™]

Noise Reduction Coefficient [NRC]
[0.15][0.30]

Ceiling Attenuation Class [CAC]
[33 - 37 dB]

Humidity Resistance
Maximum 95% RH / 40°C for ClimaPlus™

Light Reflectance Coefficient [LR]
0.83-0.86

Color
White similar to RAL 9016

Surface Burning Characteristics as per ASTM E84
Class A

Reaction to Fire as per EN 13501-1
Euroclass A2-s1, d0

Thermal Conductivity
λ = 0.057 W/m°K

Washability / Scrubbability as per ASTM D4828 & D2486
Exceeds 1000 Wash/Scrub cycles without surface break or the extent of abrasion upon request

VOC Class
Greenguard Gold

Formaldehyde Classification
Class E1 as per EN717-1

Relevant LEED® Credit
EA Credit 1 | MR Credit 4 | MR Credit 5 | MR Credit 6 IEQ Credit 3 | IEQ Credit 3.2 | IEQ Credit 4.6 | IEQ Credit 8.1 | IEQ Credit 9

Notice:
As we are involved in constant products development; this document information is subject to change without prior notice. Please always refer to **usgme.com** for the updated products information document.

©2022 Factory of USG Middle East LTD. Co.
All rights reserved.

USG ME
INNOVATIVE SOLUTIONS. EVERYTIME.

PLADIS - Complexe Futuris Logistic Lotissement Ennouala Lot N°2 Dépôt A3 Boulevard My Ismaïl- Casablanca
Tel: (212) 5 22 34 44 59 // (212) 5 22 34 44 62
Zi Gzenaya 341- Tanger , Tel: (+212) 5 31 43 65 10 Email: contact@pladis.ma Site Web : www.pladis.ma